

CHEVROLET



1985

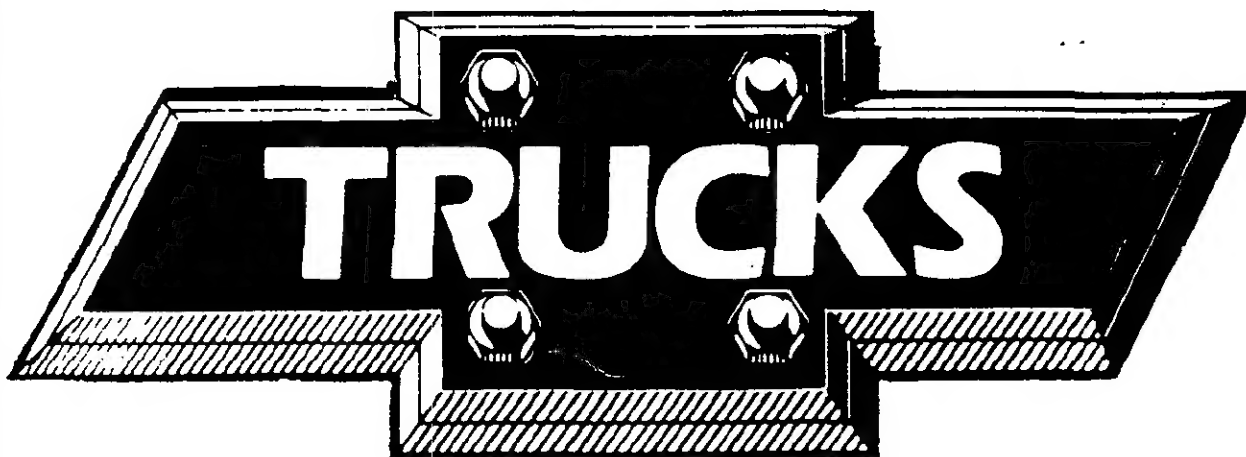



1985 -- ORIGINAL

C/K PICKUP

PICKUP MODEL SELECTOR

REGULAR CAB

FLEETSIDE/WIDESIDE

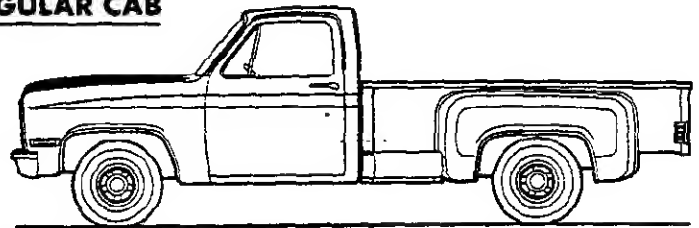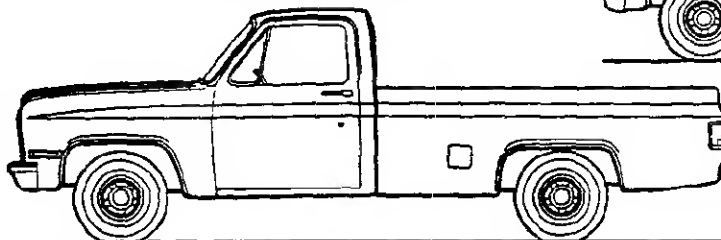


STEPSIDE/FENDERSIDE

SERIES	MODEL NUMBER		BODY ORDERING CODE			
			GASOLINE MODELS		DIESEL MODELS	
	6½' BOX	8' BOX	FLEETSIDE/ WIDESIDE	STEPSIDE/ FENDERSIDE	FLEETSIDE/ WIDESIDE	STEPSIDE/ FENDERSIDE
C10/1500	C10703	C10903	E63	*E62	E63/B3J	*E62/B3J
C20/2500	—	C20903	E63	E62	E63/B3J	E62/B3J
C20/2500/C6P	—	C20903	E63/C6P	E62/C6P	E63/C6P/B3J	E62/C6P/B3J
C30/3500	—	C30903	E63	E62	E63/B3J	E62/B3J
K10/1500 (4X4)	K10703	K10903	E63	*E62	E63/B3J	*E62/B3J
K20/2500 (4X4)	—	K20903	E63	E62	E63/B3J	E62/B3J
K20/2500/C6P (4X4)	—	K20903	E63/C6P	E62/C6P	E63/C6P/B3J	E62/C6P/B3J
K30/3500 (4X4)	—	K30903	E63	—	E63/B3J	—

*Available on C/K10703 models only.

BONUS CAB AND CREW CAB

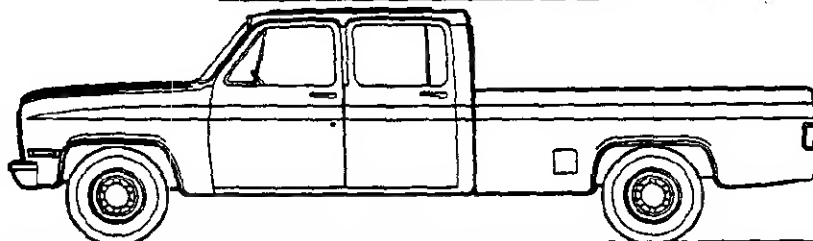

SERIES	MODEL NUMBER		BODY ORDERING CODE	
			GASOLINE MODELS	DIESEL MODELS
	BONUS CAB	CREW CAB	8' FLEETSIDE/ WIDESIDE BOX	8' FLEETSIDE/ WIDESIDE BOX
C20/2500	C20943	—	E63/YG4	E63/YG4/B3J
	—	C20943	E63/AS3	E63/AS3/B3J
C30/3500	C30943	—	E63/YG4	E63/YG4/B3J
	—	C30943	E63/AS3	E63/AS3/B3J
K30/3500 (4X4)	K30943	—	E63/YG4	E63/YG4/B3J
	—	K30943	E63/AS3	E63/AS3/B3J

GASOLINE**C/K PICKUP—2-Wheel Drive****C10/1500 REGULAR CABS****STANDARD SPECIFICATIONS**

(See Gray Tab Section for Specification Details)

Series	C10/1500
Engine	
Base Equip.	4.3 Liter, 262 4-bbl V6
Clutch	11"; 124 sq. in.
Air Filter	Oiled-paper Element
Oil Filter	Throwaway Type
Exhaust System	Single; Aluminized
Emission Control Systems	See Engine & Cooling Section for specific model applications
Suspension, Front	Independent; Coil Springs
Capacity	2950 lb.
Springs @ Ground	1475 lb. ea.
Shock Absorbers	25mm dia.
Suspension, Rear	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs
Axle Capacity	3750 lb.
Axle Ratio	2.73
Springs @ Ground	1550 lb. ea.
Shock Absorbers	25mm dia.
Brakes	Hydraulic; Self-adjusting
Front	Disc; 11.86" Rotor
Rear	Drum; 11" x 2"
Booster	—
Parking	Cable to Rear Wheels
Electrical	12 Volt; Negative Ground
Battery—Freedom Type	405 CCA ♦ @ 0°F.
—Reserve Capacity	75 min. @ 80°F.
Delcotron Generator	37 amp.
Frame	Carbon Steel; 36,39,000 psi
Section Modulus	3.10
Fuel Tank (nominal capacity)	
—117.5" WB	16 gal.
—131.5" WB	20 gal.
Steering Gear Type	Manual; Recirculating Ball Gear
Linkage	Parallelogram
Transmission	Fully Synchronized 3-Speed Manual
Shift Location	Steering Column
Tires	(5) P195/75R15 All Seasons Steel Belted Radial
Wheels	(5) Disc 15" x 6"

♦ CCA-Cold Cranking Amps

C/K PICKUP—2-Wheel Drive

C10/1500 REGULAR CABS

STANDARD SPECIFICATIONS

(See Gray Tab Section for Specification Details)

DIESEL

Series	C10/1500
Engine	
Base Equip.	6.2 Liter, 379 Cu. In. V8 Diesel
Clutch	12"; 150 sq. in.
Air Filter	Poly-wrapped, Oiled-paper Element
Oil Filter	Throwaway Type
Oil Cooler	Standard
Exhaust System	Dual; Aluminized
Emission Control Systems	See Engine & Cooling Section for specific model applications
Suspension, Front	Independent; Coil Springs
Capacity	3400 lb.
Springs @ Ground	1700 lb. ea.
Shock Absorbers	25mm dia.
Suspension, Rear	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs
Axle Capacity	3750 lb.
Axle Ratio	3.08
Springs @ Ground	1550 lb. ea.
Shock Absorbers	25mm dia.
Brakes	Hydraulic; Self-adjusting
Front	Disc; 11.86" Rotor
Rear	Drum; 11" x 2"
Booster	Hydraulic Power
Parking	Cable to Rear Wheels
Electrical	12 Volt; Negative Ground
Battery—Freedom Type	Two; 550 CCA ♦ ea. @ 0°F.
—Reserve Capacity	115 min. ea. @ 80°F.
Delcotron Generator	66 amp.
Engine Block Heater	600 watts, 120 volts
Frame	Carbon Steel; 36,39,000 psi
Section Modulus	3.10
Fuel Tank (nominal capacity)	
—117.5" WB	16 gal.
—131.5" WB	20 gal.
Steering Gear Type	Integral Power
Transmission	4 Speed Manual with Overdrive
Shift Location	Floor
Tires	(5) P205/75R15 All Seasons Steel Belted Radial
Wheels	(5) Disc
	15" x 6"

♦ CCA-Cold Cranking Amps

GASOLINE**C/K PICKUP—2-Wheel Drive****C20/2500 REGULAR CABS****C20/2500 BONUS CABS & CREW CABS****STANDARD SPECIFICATIONS**

(See Gray Tab Section for Specification Details)

Series	C20/2500 Regular Cab	C20/2500/C6P Regular Cab	C20/2500 Bonus/Crew Cab
Engine	4.3 Liter, 262 4-bbl. V6		
Base Equip.	4.8 Liter, 292 1-bbl. L6		
Clutch	11"; 124 sq. in.		
Air Filter	Oiled-paper Element		
Oil Filter	Throwaway Type		
Exhaust System	Single; Aluminized		
Emission Control Systems	See Engine & Cooling Section for specific model applications		
Suspension, Front	Independent; Coil Springs		
Capacity	3800 lb.		
Springs @ Ground	1750 lb. ea.	1900 lb. ea.	
Shock Absorbers	25mm dia.	32mm dia.	
Stabilizer Bar	—	1.06" dia.	
Suspension, Rear	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs		
Axle Capacity	5700 lb.	6000 lb.	7500 lb.
Axle Ratio	3.42	4.10	4.10
Springs @ Ground	2000 lb. ea.	3000 lb. ea.	3000 lb. ea.
Shock Absorbers	25mm dia.	32mm dia.	32mm dia.
Brakes	Hydraulic; Self-adjusting		
Front	Disc; 12.5" Rotor		
Rear	Drum; 11.15" x 2.75"	Drum; 13" x 2.5"	
Booster	Dual Diaphragm		
Parking	Cable to Rear Wheels		
Electrical	12 Volt; Negative Ground		
Battery—Freedom Type	405 CCA ♦ @ 0°F.		
—Reserve Capacity	75 min. @ 80°F.		
Delcotron Generator	37 amp.		
Frame	Carbon Steel; 36,-39,000 psi		
Section Modulus	3.57	4.53	7.33
Fuel Tank (nominal capacity)	20 gal.		
Steering Gear Type	Manual; Recirculating Ball Gear		
Linkage	Parallelogram		
Transmission	4-Speed Manual		
Shift Location	Floor		
Tires	(4) LT 215/85R16C (6PR)	Front: LT 235/85R16D (8PR) Rear: LT 235/85R16E (10PR)	
Wheels	(4) Disc		
Size	16" x 6.5"		

♦CCA-Cold Cranking Amps

C/K PICKUP—2-Wheel Drive

DIESEL

C20/2500 REGULAR CABS

C20/2500 BONUS CABS & CREW CABS

STANDARD SPECIFICATIONS

(See Gray Tab Section for Specification Details)

Series	C20/2500 Regular Cab	C20/2500/C6P Regular Cab	C20/2500 Bonus/Crew Cab		
Engine Base Equip. Clutch Air Filter Oil Filter Oil Cooler Exhaust System Emission Control Systems	6.2 Liter, 379 Cu. In V8 Diesel 12"; 150 sq. in. Poly-wrapped, Oiled-paper Element Throwaway Type Standard Dual; Aluminized See Engine & Cooling Section for specific model applications				
Suspension, Front Capacity Springs @ Ground Shock Absorbers Stabilizer Bar	Independent; Coil Springs 3800 lb. 1750 lb. ea. 25mm dia. —			1900 lb. ea. 32mm dia. 1.06" dia.	
Suspension, Rear Axle Capacity Axle Ratio Springs, Main @ Ground Shock Absorbers	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs 5700 lb. 3.42 2000 lb. ea. 25mm dia.			6000 lb. 3.73 3000 lb. ea. 32mm dia.	7500 lb. 3.73 3000 lb. ea. 32mm dia.
Brakes Front Rear Booster Parking	Hydraulic; Self-adjusting Disc; 12.5" Rotor Drum; 11.15" x 2.75"			Drum; 13" x 2.5" Hydraulic Power Cable to Rear Wheels	
Electrical Battery—Freedom Type —Reserve Capacity Delcotron Generator Engine Block Heater	12 Volt; Negative Ground Two: 550 CCA ♦ ea. @ 0°F. 115 min. ea. @ 80°F. 66 amp. 600 watts, 120 volts				
Frame Section Modulus	Carbon Steel; 36,-39,000 psi 3.57			4.53	7.33
Fuel Tank (nominal capacity)	20 gal.				
Steering Gear Type	Integral Power				
Transmission Shift Location	4-Speed Manual Floor				
Tires	(4) LT 215/85R16C (6PR)		Front: LT 235/85R16D (8PR) Rear: LT 235/85R16E (10PR)		
Wheels Size	(4) Disc 16" x 6.5"				

♦ CCA-Cold Cranking Amps

GASOLINE**C/K PICKUP—2-Wheel Drive****C30/3500 BONUS CABS & CREW CABS—C30/3500 REGULAR CABS****STANDARD SPECIFICATIONS**

(See Gray Tab Section for Specification Details)

Series	C30/3500 Regular Cab	C30/3500 Bonus/Crew Cab
Engine		
Base Equip.	4.8 Liter, 292 I-bbl L6	
Clutch	11"; 124 sq. in.	
Air Filter	Oiled-paper Element	
Oil Filter	Throwaway type	
Exhaust System	Single; Aluminized	
Emission Control Systems	See Engine & Cooling Section for specific model applications	
Suspension, Front	Independent; Coil Springs	
Capacity	3800 lb.	4000 lb.
Springs @ Ground	1900 lb. ea.	2000 lb. ea.
Shock Absorbers	32mm	
Suspension, Rear	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs	
Axle Capacity	7500 lb.	
Axle Ratio	4.10	
Springs @ Ground	3500 lb. ea.	
Shock Absorbers	32mm dia.	
Brakes	Hydraulic, Self-adjusting	
Front	Disc; 12.5" rotor	
Rear	Drum; 13" x 3.5"	
Booster	Hydraulic Power	
Parking	Cable to Rear Wheels	
Electrical	12 Volt; Negative Ground	
Battery—Freedom Type	405 CCA ♦ @ 0°F.	
—Reserve Capacity	75 min. @ 80°F.	
Delcotron Generator	37 amp.	
Frame	Carbon Steel; 36,-39,000 psi	
Section Modulus	6.14	7.33
Fuel Tank (Nominal Capacity)	20 gal.	
Steering Gear Type	Manual; Recirculating Ball Gear	
Linkage	Parallelogram	
Transmission	4-Speed Manual	
Shift Location	Floor	
Tires—Front	(2) LT235/85R16D (8PR)	
—Rear	(2) LT235/85R16E (10PR)	
Wheels	(4) Disc	
Size	16" x 6.5"	

♦ CCA-Cold Cranking Amps

C/K PICKUP—2-Wheel Drive

DIESEL

C30/3500 BONUS CABS & CREW CABS—C30/3500 REGULAR CABS

STANDARD SPECIFICATIONS

(See Gray Tab Section for Specification Details)

Series	C30/3500 Regular Cab	C30/3500 Bonus/Crew Cab
Engine	6.2 Liter, 379 Cu. In. V8 Diesel	
Base Equip.	12"; 150 sq. in.	
Clutch	Poly-wrapped, Oiled-paper Element	
Air Filter	Throwaway type	
Oil Filter	Standard	
Oil Cooler	Dual; Aluminized	
Exhaust System	See Engine & Cooling Section for specific model applications	
Emission Control Systems		
Suspension, Front	Independent; Coil Springs	
Capacity	3800 lb.	4000 lb.
Springs @ Ground	1900 lb. ea.	2000 lb. ea.
Shock Absorbers	32mm	
Suspension, Rear	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs	
Axle Capacity	7500 lb.	
Axle Ratio	4.10	
Springs @ Ground	3500 lb. ea.	
Shock Absorbers	32mm dia.	
Brakes	Hydraulic, Self-adjusting	
Front	Disc; 12.5" rotor	
Rear	Drum; 13" x 3.5"	
Booster	Hydraulic Power	
Parking	Cable to Rear Wheels	
Electrical	12 Volt; Negative Ground	
Battery—Freedom Type	Two; 550 CCA♦ ea. @ 0°F.	
—Reserve Capacity	115 min. ea. @ 80°F.	
Delcotron Generator	66 amp.	
Engine Oil Cooler	600 watts, 120 volts	
Frame	Carbon Steel; 36,39,000 psi	
Section Modulus	6.14	7.33
Fuel Tank (Nominal Capacity)	20 gal.	
Steering Gear Type	Integral Power	
Transmission	4-Speed Manual	
Shift Location	Floor	
Tires—Front	(2) LT235/85R16D (8PR)	
—Rear	(2) LT235/85R16E (10PR)	
Wheels	(4) Disc	
Size	16" x 6.5"	

♦CCA-Cold Cranking Amps

GASOLINE**C/K PICKUP—4-Wheel Drive****K10/1500-20/2500 REGULAR CABS****STANDARD SPECIFICATIONS**

(See Gray Tab Section for Specification Details)

Series	K10/1500	K20/2500	K20/2500/C6P
Engine			
Base Equip.	4.3 Liter, 262 4-bbl V6 11"; 124 sq. in.	5.7 Liter, 350 4-bbl V8 ■ 12"; 150 sq. in.	4.8 Liter, 292 1-bbl L6 11"; 124 sq. in.
Clutch	Oiled-paper Element Throwaway type Single; Aluminized See Engine & Cooling Section for specific model applications		
Air Filter			
Oil Filter			
Exhaust System			
Emission Control System			
Suspension, Front	Salisbury Axle; Hypoid Drive; Single Stage Leaf Springs		
Capacity	3600 lb.	3800 lb.	3800 lb.
Axle Ratio	3.42	3.23	4.10
Springs @ Ground	1850 lb. ea.	1850 lb. ea.	1850 lb. ea.
Shock Absorbers	25mm dia.	25mm dia.	32mm dia.
Stabilizer Bar	1.25" dia.		
Hubs, Manual Locking	Standard		
Suspension, Rear	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs		
Axle Capacity	3750 lb.	5700 lb.	6000 lb.
Axle Ratio	3.42	3.23	4.10
Springs @ Ground	1875 lb. ea.	2000 lb. ea.	3000 lb. ea.
Shock Absorbers	25mm dia.	25mm dia.	32mm dia.
Brakes	Hydraulic—Self-adjusting		
Front	Disc; 11.86" Rotor	Disc; 12.5" Rotor	Disc; 12.5" Rotor
Rear	Drum; 11.15" x 2.75"	Drum; 11.15" x 2.75"	Drum; 13.0" x 2.5"
Booster	Dual Diaphragm Cable to Rear Wheels		
Parking			
Electrical	12 Volt; Negative Ground		
Battery—Freedom Type	405 CCA ♦ @ 0°F.		
—Reserve Capacity	75 min. @ 80°F.		
Delcotron Generator	37 amp.		
Frame	Carbon Steel; 36,-39,000 psi		
Section Modulus—117.5" WB	3.14	—	—
—131.5" WB	3.88	3.88	4.53
Fuel Tank (nominal capacity)	16 gal.	—	—
—117.5" WB	20 gal.	20 gal.	20 gal.
—131.5" WB			
Steering Gear Type	Integral Power		
Transmission	4-Speed Manual	4-Speed Manual	
Shift Location	Floor	Floor	
Transfer Case	New Process 208 2-Speed Conventional		
Shift Lever	Single Lever		
Tires	(5) P235/75R15 All Seasons Steel Belted Radial	(4) LT215/85R16C (6PR)	Fr. (2) LT235/85R16D (8PR) Rr. (2) LT235/85R16E (10PR)
Wheels	(5) Disc 15" x 6"	(4) Disc 16" x 6.5"	(4) Disc 16" x 6.5"

■ Standard engine not available for registration in the State of California; see Power Teams Chart.

♦ CCA-Cold Cranking Amps

C/K PICKUP—4-Wheel Drive

K10/1500-20/2500 REGULAR CABS

DIESEL

STANDARD SPECIFICATIONS

(See Gray Tab Section for Specification Details)

Series	K10/1500	K20/2500	K20/2500/C6P
Engine Base Equip. Clutch Air Filter Oil Filter Oil Cooler Exhaust System Emission Control System	6.2 Liter, 379 Cu. In. V8 Diesel 12"; 150 sq. in. Poly-wrapped Oiled-paper Element Throwaway type Standard Dual; Aluminized See Engine & Cooling Section for specific model applications		
Suspension, Front	Salisbury Axle; Hypoid Drive; Single Stage Leaf Springs		
Capacity	3600 lb.	3800 lb.	3800 lb.
Axle Ratio	3.08	3.73	3.73
Springs @ Ground	1850 lb. ea.	1850 lb. ea.	1850 lb. ea.
Shock Absorbers	25mm dia.	25mm dia.	32mm dia.
Stabilizer Bar	1.25" dia.		
Hubs, Manual Locking	Standard		
Suspension, Rear	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs		
Axle Capacity	3750 lb.	5700 lb.	6000 lb.
Axle Ratio	3.08	3.73	3.73
Springs @ Ground	1875 lb. ea.	2000 lb. ea.	3000 lb. ea.
Shock Absorbers	25mm dia.	25mm dia.	32mm dia.
Brakes	Hydraulic—Self-adjusting		
Front	Disc; 11.86" Rotor	Disc; 12.5" Rotor	Disc; 12.5" Rotor
Rear	Drum; 11.15" x 2.75"	Drum; 11.15" x 2.75"	Drum; 13.0" x 2.5"
Booster	Hydraulic Power		
Parking	Cable to Rear Wheels		
Electrical	12 Volt; Negative Ground		
Battery—Freedom Type	Two; 550 CCA ♦ ea. @ 0°F.		
—Reserve Capacity	115 min. ea. @ 80°F.		
Delcotron Generator	66 amp.		
Engine Block Heater	600 watts, 120 volts		
Frame	Carbon Steel; 36,-39,000 psi		
Section Modulus—117.5" WB	3.14	—	—
—131.5" WB	3.88	3.88	4.53
Fuel Tank (nominal capacity)	16 gal.	—	—
—117.5" WB	20 gal.	20 gal.	20 gal.
—131.5" WB			
Steering Gear Type	Integral Power		
Transmission	4-Speed Manual	4-Speed Manual	
Shift Location	Floor	Floor	
Transfer Case	New Process 208 2-Speed Conventional		
Shift Lever	Single Lever		
Tires	(5) P235/75R15 All Seasons Steel Belted Radial	(4) LT215/85R16C (6PR)	Fr. (2) LT235/85R16D (8PR) Rr. (2) LT235/85R16E (10PR)
Wheels	(5) Disc 15" x 6"	(4) Disc 16" x 6.5"	(4) Disc 16" x 6.5"

♦ CCA-Cold Cranking Amps

GASOLINE**C/K PICKUP—4-Wheel Drive****K30/3500 REGULAR CABS AND
K30/3500 BONUS CAB & CREW CABS****STANDARD SPECIFICATIONS**

(See Gray Tab Section for Specification Details)

Series	K30/3500 Regular Cab	K30/3500 Bonus/Crew Cab
Engine	4.8 Liter, 292 l-bbl. L6	
Base Equip.	11"; 124 sq. in.	
Clutch	Oiled-paper Element	
Air Filter	Throwaway Type	
Oil Filter	Single; Aluminized	
Exhaust System	See Engine & Cooling Section for specific model applications	
Emission Control Systems		
Suspension, Front	Salisbury Axle; Hypoid Drive; Single Stage Leaf Springs	
Capacity	4500 lb.	
Axle Ratio	4.56	
Springs @ Ground	2250 lb. ea.	
Shock Absorbers	32mm dia.	
Stabilizer Bar	1.25" dia.	
Hubs, Manual Locking	Standard	
Suspension, Rear	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs	
Axle Capacity	7500 lb.	
Axle Ratio	4.56	
Springs @ Ground	3500 lb. ea.	
Shock Absorbers	32mm dia.	
Brakes	Hydraulic; Self-adjusting	
Front	Disc; 12.5" Rotor	
Rear	Drum; 13.0" x 3.5"	
Booster	Hydraulic Power	
Parking	Cable to Rear Wheels	
Electrical	12 Volt; Negative Ground	
Battery—Freedom Type	405 CCA♦ @ 0°F.	
—Reserve Capacity	75 min. @ 80°F.	
Delcotron Generator	37 amp.	
Frame	Carbon Steel; 36,39,000 psi	
Section Modulus	6.14	7.33
Fuel Tank (nominal capacity)	20 gal.	
Steering Gear Type	Integral Power	
Transmission	4-Speed Manual	
Shift Location	Floor	
Transfer Case	New Process 205 2-Speed Conventional	
Shift Lever	Single Lever	
PTO Opening	Left Side	
Tires—Front	(2) LT235/85R16D (8PR)	
—Rear	(2) LT235/85R16E (10PR)	
Wheels	(4) Disc	
	16" x 6.5"	

♦CCA-Cold Cranking Amps

C/K PICKUP—4-Wheel Drive

DIESEL


K30/3500 REGULAR CABS AND K30/3500 BONUS CAB & CREW CABS

STANDARD SPECIFICATIONS

(See Gray Tab Section for Specification Details)

Series	K30/3500 Regular Cab	K30/3500 Bonus/Crew Cab
Engine		
Base Equip.	6.2 Liter, 379 Cu. in. V8 Diesel	
Clutch	12"; 150 sq. in.	
Air Filter	Poly-wrapped, Oiled-paper Element	
Oil Filter	Throwaway Type	
Oil Cooler	Standard	
Exhaust System	Dual; Aluminized	
Emission Control Systems	See Engine & Cooling Section for specific model applications	
Suspension, Front	Salisbury Axle; Hypoid Drive; Single Stage Leaf Springs	
Capacity	4500 lb.	
Axle Ratio	4.10	
Springs @ Ground	2250 lb. ea.	
Shock Absorbers	32mm dia.	
Stabilizer Bar	1.25" dia.	
Hubs, Manual Locking	Standard	
Suspension, Rear	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs	
Axle Capacity	7500 lb.	
Axle Ratio	4.10	
Springs @ Ground	3500 lb. ea.	
Shock Absorbers	32mm dia.	
Brakes	Hydraulic; Self-adjusting	
Front	Disc; 12.5" Rotor	
Rear	Drum; 13.0" x 3.5"	
Booster	Hydraulic Power	
Parking	Cable to Rear Wheels	
Electrical	12 Volt; Negative Ground	
Battery—Freedom Type	Two; 550 CCA ♦ ea. @ 0°F.	
—Reserve Capacity	115 min. ea. @ 80°F.	
Delcotron Generator	66 amp.	
Engine Block Heater	600 watts, 120 volts	
Frame	Carbon Steel; 36,39,000 psi	
Section Modulus	6.14	7.33
Fuel Tank (nominal capacity)	20 gal.	
Steering Gear Type	Integral Power	
Transmission	4-Speed Manual	
Shift Location	Floor	
Transfer Case	New Process 205 2-Speed Conventional	
Shift Lever	Single Lever	
PTO Opening	Left Side	
Tires—Front	(2) LT235/85R16D (8PR)	
—Rear	(2) LT235/85R16E (10PR)	
Wheels	(4) Disc 16" x 6.5"	

♦ CCA—Cold Cranking Amps

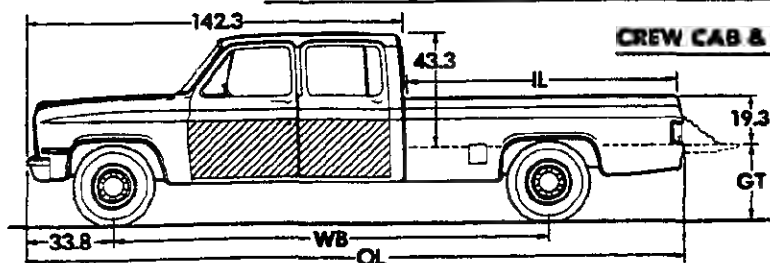GASOLINE
C/K PICKUP
C10/1500-30/3500 SERIES FLEETSIDE/WIDESIDE PICKUP

CREW CAB & BONUS CAB
Body Ordering Codes:


Regular Cab—E63

Bonus Cab—E63 & YG4

Crew Cab—E63 & AS3

Sign Panel Area (side)

 Regular Cab—22" x 38½"
 Bonus/Crew Cab—22" x 72½"

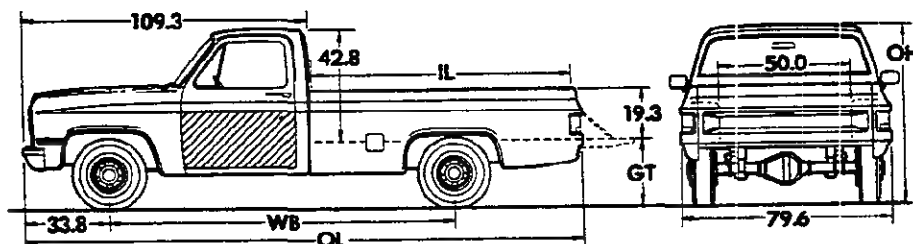REGULAR CAB


Model	Wheelbase (in)	Body—Payload Weight Distribution*	
		% Front	% Rear
C1	117.5	1	99
C1-3	131.5	4	96
C2-3	164.5	3	97

*Estimate based on water-level loading.

Series	Ground Clearance (in)*	
	Front	Rear
C1	7.6	7.3
C2	8.0	7.8
C3	8.0	7.7

Model	Engine No. Cyl.	Dimensions (in)*					Curb Weight (lb)			Model Weight (lb)*		
		WB	IL	OL	OH	GT	Front	Rear	Total	Front	Rear	Total

C10/1500 SERIES

C10703	6	117.5	78.2	193.5	69.2	27.6	2067	1419	3486	2287	1649	3936
C10903	6	131.5	98.1	212.2	69.2	27.6	2147	1501	3648	2393	1705	4098

C20/2500 SERIES

C20903	6	131.5	98.1	212.2	72.2	31.0	2353	1695	4048	2599	1899	4498
C20903 (w/C6P)	6	131.5	98.1	212.2	72.2	31.0	2384	1762	4146	2630	1966	4596
C20943 (Bonus Cab)	6	164.5	98.1	246.4	73.6	32.1	2677	2070	4747	2962	2235	5197
C20943 (Crew Cab)	6	164.5	98.1	246.4	73.6	32.1	2704	2104	4808	3184	2524	5708

C30/3500 SERIES


C30903	6	131.5	98.1	212.2	73.6	33.5	2496	1913	4409	2742	2117	4859
C30943 (Bonus Cab)	6	164.5	98.1	246.4	73.7	32.3	2738	2091	4829	3023	2256	5279
C30943 (Crew Cab)	6	164.5	98.1	246.4	73.7	32.3	2765	2125	4890	3245	2545	5790

*Dimensions with standard equipment, unloaded. *Model Weight includes Curb Weight plus occupants (standard seating capacity ± 150 lb.). Total Model Weight may vary as much as ±50 lbs. to allow for production build variation.

C/K PICKUP


C10/1500-30/3500 SERIES FLEETSIDE/WIDESIDE PICKUP

DIESEL

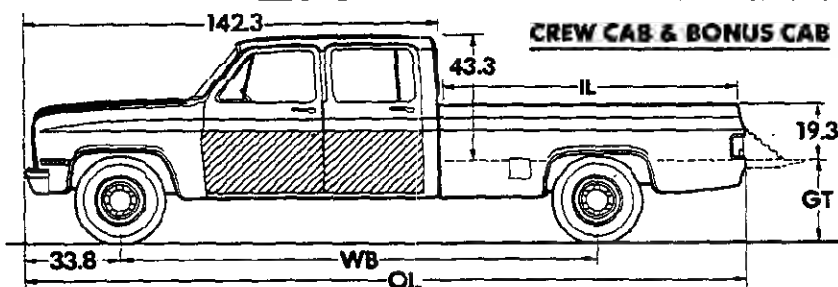

Body Ordering Codes:
 Regular Cab—E63/B3J
 Bonus Cab—E63/YG4/B3J
 Crew Cab—E63/AS3/B3J

Sign Panel Area (side)
 Regular Cab—22" x 39½"
 Bonus/Crew Cab—22" x 72¼"

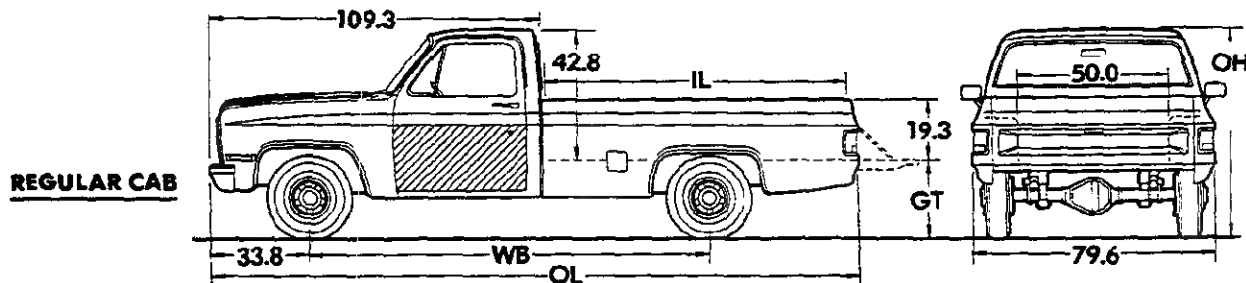

Model	Wheelbase (in)	Body—Payload Weight Distribution*	
		% Front	% Rear
C1	117.5	1	99
C1-3	131.5	4	96
C2-3	164.5	3	97

*Estimate based on water-level loading.

Series	Ground Clearance (in)*	
	Front	Rear
C1	7.6	7.3
C2	8.0	7.8
C3	8.0	7.7

Model	Engine No. Cyl.	Dimensions (in)*					Curb Weight (lb)			Model Weight (lb)*		
		WB	IL	OL	OH	GT	Front	Rear	Total	Front	Rear	Total

C10/1500 SERIES

C10703	8	117.5	78.2	193.5	69.2	27.6	2521	1551	4072	2741	1781	4522
C10903	8	131.5	98.1	212.2	69.2	27.6	2601	1548	4149	2847	1752	4599

C20/2500 SERIES

C20903	8	131.5	98.1	212.2	72.2	31.0	2793	1736	4529	3039	1940	4979
C20903 (w/C6P)	8	131.5	98.1	212.2	72.2	31.0	2875	1877	4752	3121	2081	5202
C20943 (Bonus Cab)	8	164.5	98.1	246.4	73.6	32.1	3108	2134	5242	3393	2299	5692
C20943 (Crew Cab)	8	164.5	98.1	246.4	73.6	32.1	3135	2168	5303	3615	2588	6203

C30/3500 SERIES

C30903	8	131.5	98.1	212.2	73.6	33.5	2906	1966	4872	3152	2170	5322
C30943 (Bonus Cab)	8	164.5	98.1	246.4	73.7	32.3	3151	2155	5306	3436	2320	5756
C30943 (Crew Cab)	8	164.5	98.1	246.4	73.7	32.3	3178	2189	5367	3658	2609	6267

*Dimensions with standard equipment, unloaded. *Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb.).
 Total Model Weight may vary as much as ± 50 lbs. to allow for production build variation.

GASOLINE

C/K PICKUP


K10/1500-30/3500 SERIES FLEETSIDE/WIDESIDE PICKUP

Body Ordering Codes:

Regular Cab—E63

Bonus Cab—E63 & YG4

Crew Cab—E63 & A53

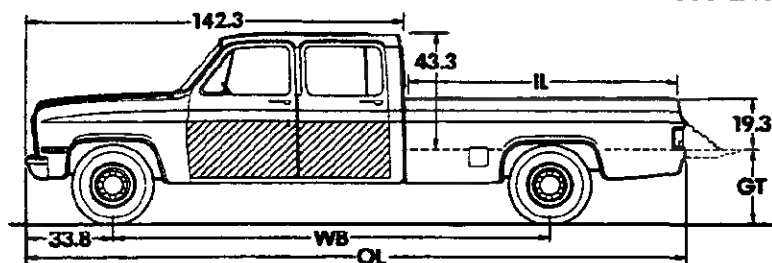


BONUS CAB & CREW CAB

Sign Panel Area (side)

Regular Cab—22" x 39½"
Bonus/Crew Cab—22" x 72¼"



REGULAR CAB

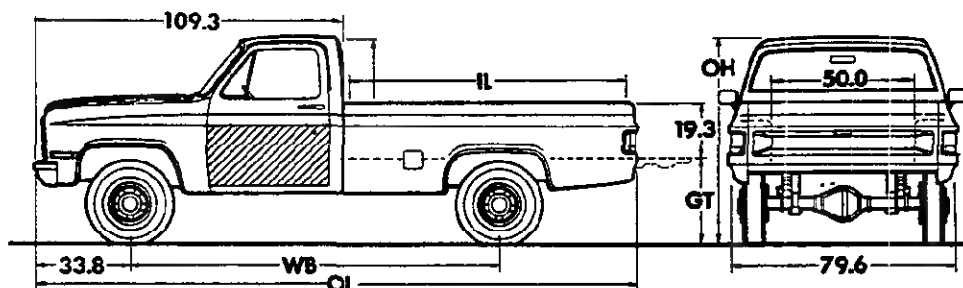

Model	Wheelbase (in)	Body—Payload Weight Distribution*	
		% Front	% Rear
K1	117.5	1	99
K1-3	131.5	4	96
K3	164.5	3	97

*Estimate based on water-level loading.

Series	Ground Clearance (in)*	
	Front	Rear
K1	7.4	7.1
K2	8.8	7.2
K3	8.3	7.8

Model	Engine No. Cyl.	Dimensions (in)*					Curb Weight (lb)			Model Weight (lb)*		
		WB	IL	OL	OH	GT	Front	Rear	Total	Front	Rear	Total

K10/1500 SERIES

K10703	6	117.5	78.2	193.8	73.4	32.0	2459	1589	4048	2679	1819	4498
K10903	6	131.5	98.1	212.2	73.4	32.0	2554	1688	4242	2800	1892	4692

K20/2500 SERIES

K20903	8	131.5	98.1	212.2	74.2	33.2	2743	1746	4489	2989	1950	4939
K20903 (w/C6P)	6	131.5	98.1	212.2	74.2	33.2	2751	1827	4578	2997	2031	5028

K30/3500 SERIES

K30903	6	131.5	98.1	212.2	76.4	35.7	2905	1987	4892	3151	2191	5342
K30943 (Bonus Cab)	6	164.5	98.1	246.4	76.3	34.6	3147	2161	5308	3432	2326	5758
K30943 (Crew Cab)	6	164.5	98.1	246.4	76.3	34.6	3174	2195	5369	3654	2615	6269


*Dimensions with standard equipment, unloaded. *Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb). Total Model Weight may vary as much as ±50 lbs. to allow for production build variation.

C/K PICKUP

K10/1500-30/3500 SERIES FLEETSIDE/WIDESIDE PICKUP


DIESEL

Body Ordering Codes:
 Regular Cab—E63/B3J
 Bonus Cab—E63/YG4/B3J
 Crew Cab—E63/AS3/B3J

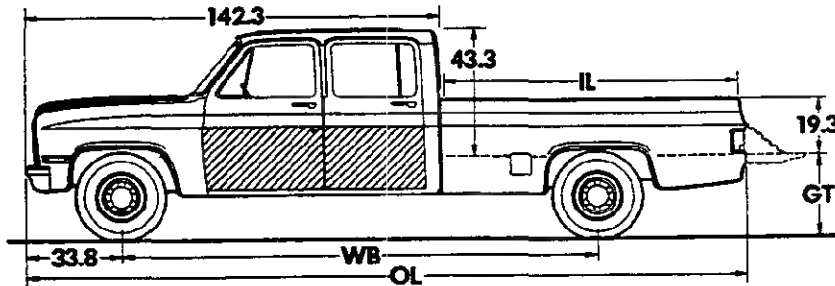


BONUS CAB & CREW CAB

Sign Panel Area (side)
 Regular Cab—22" x 39½"
 Bonus/Crew Cab—22" x 72¼"



REGULAR CAB

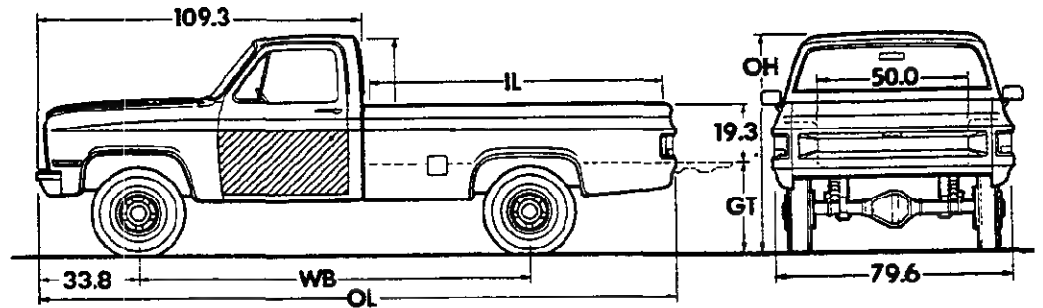

Model	Wheelbase (in)	Body—Payload Weight Distribution*	
		% Front	% Rear
K1	117.5	1	99
K1-3	131.5	4	96
K3	164.5	3	97

*Estimate based on water-level loading.

Series	Ground Clearance (in)*	
	Front	Rear
K1	7.4	7.1
K2	8.8	7.2
K3	8.3	7.8

Model	Engine No. Cyl.	Dimensions (in)*					Curb Weight (lb)			Model Weight (lb)*		
		WB	IL	OL	OH	GT	Front	Rear	Total	Front	Rear	Total

K10/1500 SERIES

K10703	8	117.5	78.2	193.8	73.4	32.0	2868	1634	4502	3088	1864	4952
K10903	8	131.5	98.1	212.2	73.4	32.0	3147	1734	4881	3393	1938	5331

K20/2500 SERIES

K20903	8	131.5	98.1	212.2	74.2	33.2	3054	1806	4860	3300	2010	5310
K20903 (w/C6P)	8	131.5	98.1	212.2	74.2	33.2	3110	1915	5025	3356	2119	5475


K30/3500 SERIES

K30903	8	131.5	98.1	212.2	76.4	35.7	3307	2040	5347	3553	2244	5797
K30943 (Bonus Cab)	8	164.5	98.1	246.4	76.3	34.6	3548	2225	5773	3833	2390	6223
K30943 (Crew Cab)	8	164.5	98.1	246.4	76.3	34.6	3575	2259	5834	4055	2679	6734

*Dimensions with standard equipment, unloaded. *Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb). Total Model Weight may vary as much as ±50 lbs. to allow for production build variation.

GASOLINE
C/K PICKUP
STEPSIDE/FENDERSIDE PICKUP

Body Ordering Code—E62

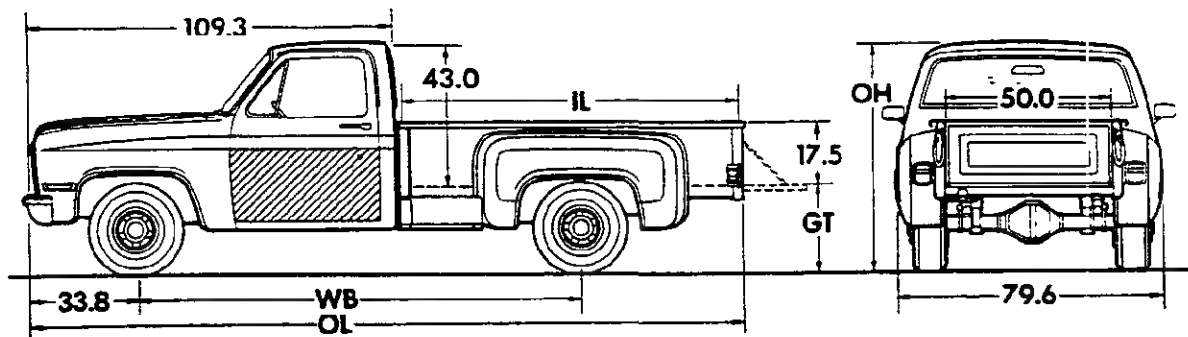
 Sign Panel Area (side)
22" x 39 1/4"


Model	Wheelbase (in.)	Body—Payload Weight Distribution*	
		% Front	% Rear
C-K1	117.5	1	99
C-K1-2-3	131.5	4	96

*Estimate based on water-level loading.

Series	Ground Clearance (in.)*	
	Front	Rear
C1	7.5	7.2
C2	8.0	7.8
C3	8.0	7.8
K1	7.2	7.1
K2	8.8	7.2

Model	Engine No. Cyl.	Dimensions (in.)*					Curb Weight (lb)			Model Weight (lb)*		
		WB	IL	OL	OH	GT	Front	Rear	Total	Front	Rear	Total

C10/1500 SERIES

C10703	6	117.5	78.4	191.1	69.5	27.5	2065	1374	3439	2285	1604	3889
---------------	---	-------	------	-------	------	------	------	------	------	------	------	------

C20/2500 SERIES

C20903	6	131.5	98.3	210.8	72.2	30.8	2348	1638	3986	2594	1842	4436
C20903 (W/C6P)	6	131.5	98.3	210.8	72.2	30.8	2379	1705	4084	2625	1909	4534

C30/3500 SERIES

C30903	6	131.5	98.3	210.8	73.6	33.8	2491	1856	4347	2737	2060	4797
---------------	---	-------	------	-------	------	------	------	------	------	------	------	------

K10/1500 SERIES

K10703	6	117.5	78.4	191.4	73.4	31.8	2457	1544	4001	2677	1774	4451
---------------	---	-------	------	-------	------	------	------	------	------	------	------	------

K20/2500 SERIES

K20903	8	131.5	98.3	211.2	74.2	33.1	2738	1689	4427	2984	1893	4877
K20903 (W/C6P)	6	131.5	98.3	211.2	74.2	33.1	2746	1770	4516	2992	1974	4966


 *Dimensions with standard equipment, unloaded. *Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb.). Total Model Weight may vary as much as ± 50 lbs. to allow for production build variation.

C/K PICKUP

STEPSIDE/FENDERSIDE PICKUP

Body Ordering Code—E62/B3J

DIESEL

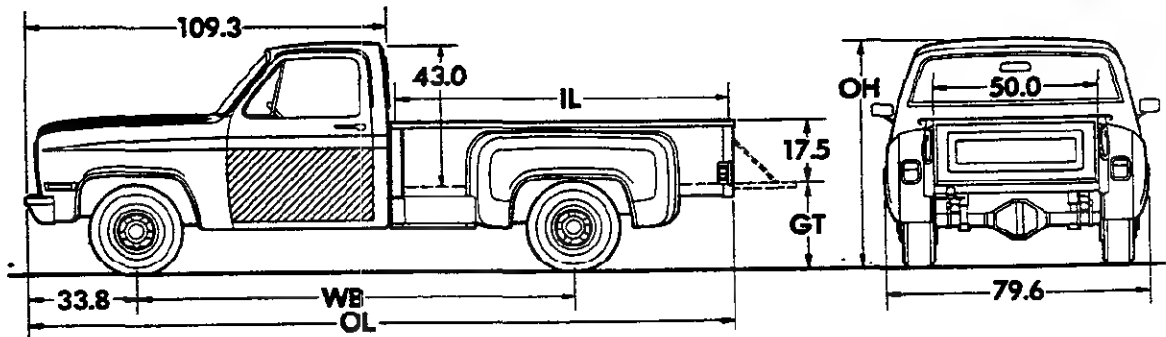

Sign Panel Area (side)
22" x 39 1/2"

Model	Wheelbase (in.)	Body - Payload Weight Distribution*	
		% Front	% Rear
C-K1	117.5	1	99
C-K1-2-3	131.5	4	96

*Estimate based on water-level loading.

Series	Ground Clearance (in.)*	
	Front	Rear
C1	7.5	7.2
C2	8.0	7.8
C3	8.0	7.8
K1	7.2	7.1
K2	8.8	7.2

Model	Engine No. Cyl.	Dimensions (in.)*					Curb Weight (lb)			Model Weight (lb)*		
		WB	IL	OL	OH	GT	Front	Rear	Total	Front	Rear	Total

C10/1500 SERIES

C10703	8	117.5	78.4	191.1	69.5	27.5	2519	1508	4027	2739	1738	4477
---------------	---	-------	------	-------	------	------	------	------	------	------	------	------

C20/2500 SERIES

C20903	8	131.5	98.3	210.8	72.2	30.8	2788	1679	4467	3034	1883	4917
C20903 (W/C6P)	8	131.5	98.3	210.8	72.2	30.8	2870	1820	4690	3116	2024	5140

C30/3500 SERIES

C30903	8	131.5	98.3	210.8	73.4	33.3	2901	1909	4810	3147	2113	5260
---------------	---	-------	------	-------	------	------	------	------	------	------	------	------

K10/1500 SERIES

K10703	8	117.5	78.4	191.4	73.4	31.8	2866	1589	4455	3086	1819	4905
---------------	---	-------	------	-------	------	------	------	------	------	------	------	------

K20/2500 SERIES

K20903	8	131.5	98.3	211.2	74.2	33.1	3051	1782	3833	3297	1986	4283
K20903 (W/C6P)	8	131.5	98.3	211.2	74.2	33.1	3105	1858	4963	3351	2062	5413

*Dimensions with standard equipment, unloaded. *Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb.). Total Model Weight may vary as much as \pm 50 lbs. to allow for production build variation.

C/K PICKUP

POWER TEAMS

ALL STATES EXCEPT CALIFORNIA

C-K10/1500 SERIES

POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE)
 (Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

ENGINE	TRANSMISSION			AXLES					GVWR
	3SP	4SP	AUTO	273	308	342	373		
W/NA5 STANDARD EMISSION EQUIPMENT									
-C10703-C10903									
LB1 V6 4.3 Liter (262-488L)	MM3	MM4	MX1		GQ1	*GU4	—	—	49/5200
		MM7	MX0		—	GQ1	*GU6	—	49/5200
	MM3	MM4	MX0		—	GQ1	GU6	—	5600
		MM7			—	—	GQ1	%GT4	5600
	MM3		MX1		GQ1	GU4	—	—	56/6100
		MM7			—	—	—	GQ1	6100
		MM4			—	GQ1	—	—	6100
					—	—	GQ1	—	6100
			MX0		—	GQ1	GU6	—	6100
					—	GQ1	GU6	—	N/A 6100
LE9 V8 5.0 Liter (305-488L)	MM3	MM7			—	GQ1	GU6	—	N/A 6100
		MM4	MX0/1		GQ1	GU4	—	—	N/A 6100
	MM3	MM7			—	—	GQ1	—	6100
		MM4			—	GQ1	—	—	6100
			MX0		GQ1	GU4	GU6	—	6100
			MX1		GQ1	GU4	—	—	6100
LH6 Diesel 6.2 Liter V8 (379 Cu In)(Reqs B3J)		MM7			—	GQ1	GU6	—	52/5600
		MM4	MX0		GQ1	GU4	—	—	52/5600
		MM7			—	—	GQ1	—	6100
		MM4	MX0		—	GQ1	GU6	—	6100
-K10703-K10903									
LB1 V6 4.3 Liter (262-488L)		MM4	MX0		—	—	GQ1	%GT4	6100
		MM7			—	—	—	%GQ1	6100
LE9 V8 5.0 Liter (305-488L)		MM7			—	—	GQ1	GT4	6100
		MM4			GQ1	GU4	—	—	6100
			MX0		—	GQ1	GU6	GT4	6100
LH6 Diesel 6.2 Liter V8 (379 Cu In)(Reqs B3J)		MM4	MX0		—	GQ1	GU6	—	6100
		MM7			—	—	GQ1	—	6100
W/NA6 HIGH ALTITUDE EMISSION EQUIPMENT									
-C10703-C10903									
LB1 V6 4.3 Liter (262-488L)	MM3	MM4/7	MX0/1		—	—	GQ1	%GT4	N/A 6100
	MM3	MM4	MX0/1		—	—	GQ1	%GT4	6100
		MM7			—	—	—	%GQ1	6100
LE9 V8 5.0 Liter (305-488L)	MM3	MM4/7	MX0		—	GQ1	—	GT4	N/A 6100
	MM3	MM7			—	—	—	GQ1	6100
		MM4	MX0 MX1		—	GQ1 GQ1	—	GT4 —	6100 ALL
LH6 Diesel 6.2 Liter V8 (379 Cu In)(Reqs B3J)		MM4/7	MX0		—	GQ1	—	GT4	52/5600
		MM4	MX0		—	GQ1	GU6	GT4	6100
		MM7			—	—	GQ1	GT4	6100
-K10703-K10903									
LB1 V6 4.3 Liter (262-488L)		MM4	MX0		—	—	GQ1	%GT4	6100
		MM7			—	—	—	%GQ1	6100
LE9 V8 5.0 Liter (305-488L)		MM7			—	—	GQ1	GT4	6100
		MM4			—	GQ1	—	GT4	6100
			MX0		—	GQ1	GU6	GT4	6100
LH6 Diesel 6.2 Liter V8 (379 Cu In)(Reqs B3J)		MM4/7	MX0		—	—	GQ1	GT4	6100

*N/A P195/75R15 or P205/75R15 Tires
 %Reqs KC4 Eng. Oil Cooler

C/K PICKUP

POWER TEAMS

CALIFORNIA ONLY

C-K10/1500 SERIES

POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE)

(Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

ENGINE	TRANSMISSION			AXLES					GVWR
	3-SP	4-SP	AUTO		2.73	3.08	3.42	3.73	
W/YF5 CALIFORNIA EMISSION REQUIREMENTS									
LB1 V6 4.3 Liter (262-4BBL)	MM3				GQ1	GU4	—	—	49/5200
		MM7	MX0	—	GQ1	GU6	—	49/5200	
	MM3		MX0	—	GQ1	GU6	—	5600	
		MM7		—	—	GQ1	%GT4	5600	
	MM3			—	—	GQ1	—	6100	
		MM7		—	—	—	%GQ1	6100	
LF3 V8 5.0 Liter (305-4BBL)			MX0	—	GQ1	GU6	—	6100	
			MX0	GQ1	GU4	—	—	49/5200	
			MX0	—	GQ1	—	—	56/6100	
LH6 Diesel 6.2 Liter V8 (379 Cu In)(Reqs B3J)		MM7		—	GQ1	GU6	—	52/5600	
			MX0	GQ1	GU4	—	—	52/5600	
			MX0	—	GQ1	GU6	—	6100	
	MM7		—	—	GQ1	—	6100		
-K10703-K10903									
LB1 4.3 Liter (262-4BBL)		MM4	MX0	—	—	GQ1	%GT4	6100	
LS9 V8 5.7 Liter (350-4 BBL)			MX0	GQ1	GU4	—	—	6100	
LH6 Diesel 6.2 Liter V8 (379 Cu In)(Reqs B3J)			MX0	—	GQ1	GU6	—	6100	
		MM7		—	—	GQ1	—	6100	

*N/A P195/75R15 or P205/75R15 Tires

%Reqs KC4 Eng. Oil Cooler

ENGINE RATINGS

Engine ratings shown are not official at this time, and are for guide purposes only.

ALL STATES EXCEPT CALIFORNIA

SAE Net Ratings @ 85°F	*4.3 Liter 262 4-bbl V6	**4.8 Liter 292 1-bbl L6	*5.0 Liter 305 4-bbl V8
Net Horsepower	155 @ 4000 rpm	115 @ 3600 rpm	160 @ 4400 rpm
Net Torque, lb-ft	230 @ 2400 rpm	215 @ 1600 rpm	235 @ 2000 rpm
SAE Net Ratings @ 85°F	*5.7 Liter 350 4-bbl V8	**5.7 Liter 350 4-bbl V8	**7.4 Liter 454 4-bbl V8
Net Horsepower	165 @ 3800 rpm	160 @ 3800 rpm	230 @ 3800 rpm
Net Torque, lb-ft	275 @ 1600 rpm	250 @ 2800 rpm	360 @ 2800 rpm
SAE Net Ratings @ 85°F	*6.2 Liter 379 V8 Diesel		**6.2 Liter 379 V8 Diesel
Net Horsepower	130 @ 3600 rpm		148 @ 3600 rpm
Net Torque, lb-ft	240 @ 2000 rpm		246 @ 2000 rpm

*Engine with Light or Medium Duty Emissions (w/GVWR up to 8500 lb.).

**Engine with Heavy Duty Emissions (w/GVWR over 8500 lb.).

ENGINE RATINGS

CALIFORNIA ONLY

SAE Net Ratings	*4.3 Liter 262 4-bbl V6	**4.8 Liter 292 1-bbl L6	*5.0 Liter 305 4-bbl V8	*5.7 Liter 350 4-bbl V8
Net Horsepower	155 @ 4000 rpm	115 @ 3600 rpm	155 @ 4000 rpm	165 @ 3800 rpm
Net Torque, lb-ft	230 @ 2400 rpm	215 @ 1600 rpm	245 @ 1600 rpm	275 @ 1600 rpm
SAE Net Ratings	**5.7 Liter 350 4-bbl V8	**7.4 Liter 454 4-bbl V8	*6.2 Liter 379 V8 Diesel	**6.2 Liter 379 V8 Diesel
Net Horsepower	155 @ 4000 rpm	230 @ 3800 rpm	130 @ 3600 rpm	148 @ 3600 rpm
Net Torque, lb-ft	240 @ 2800 rpm	360 @ 2800 rpm	240 @ 2000 rpm	246 @ 2000 rpm

*Engine with Light or Medium Duty Emissions (w/GVWR up to 8500 lb.).

**Engine with Heavy Duty Emissions (w/GVWR over 8500 lb.).

C/K PICKUP

POWER TEAMS

ALL STATES EXCEPT CALIFORNIA

C-K20/2500 SERIES

POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE)

(Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

ENGINE	TRANSMISSION			AXLES						GVWR
	4SP	AUTO		#323	342	373	410	456		
W/NA5 STANDARD EMISSION EQUIPMENT (w/LL4, L25, LT9 or LE8 Satisfies High Altitude Emission Requirements)										
-C20903										
LB1 V6 4.3 Liter (262-488L) (N/A C6P)	MM4	MX0		—	GQ1	%GT4	—	—	64/7200	
L25 L6 4.8 Liter (292-188L)(Reqs C6P)	MM4			—	—	—	GQ1	HC4	8600	
LE9 V8 5.0 Liter (305-488L) (N/A C6P)	MM4			#GQ1	GU6	—	—	—	6400	
	MM4	MX0		#GQ1	GU6	GT4	—	—	6400	
				GQ1	—	—	—	7200		
LT9 V8 5.7 Liter (350 4-88L)(Reqs C6P)	MM4			—	GQ1	GT4	—	—	7200	
				—	GQ1	GT4	GT5	—	8600	
		MX1		—	—	—	GQ1	HC4	8600	
LE8 V8 7.4 Liter (454-488L) (Reqs C6P, N41 & UA1)	MM4	MX1		#GQ1	—	GT4	GT5	—	8600	
LH6 Diesel 6.2 Liter V8 (379 Cu In)(Reqs B3J) (N/A C6P)	MM4			—	GQ1	GT4	—	—	6400	
		MX0		#GQ1	GU6	—	—	—	6400	
	MM4			—	—	GQ1	GT5	—	7200	
			MX0		—	GQ1	—	—	—	7200
LL4 Diesel (379 Cu In) (Reqs B3J & C6P)	MM4			—	—	GQ1	GT5	—	8600	
		MX1		—	—	—	GQ1	HC4	8600	
-K20903										
L25 L6 4.8 Liter (292-188L)(Reqs C6P)	MM4			—	—	—	GQ1	—	8600	
LS9 V8 5.7 Liter (350-488L)(N/A C6P)	MM4			#GQ1	GU6	—	—	—	6600	
		MX0		#GQ1	GU6	GT4	—	—	6600	
LT9 V8 5.7 Liter (350 4-88L)(Reqs C6P)	MM4			—	GQ1	GT4	GT5	—	8600	
		MX1		—	—	—	GQ1	—	8600	
				—	—	GQ1	GT5	—	6600	
LH6 Diesel 6.2 Liter V8 (379 Cu In)(Reqs B3J) (N/A C6P)	MM4			—	—	GQ1	GT5	—	6600	
		MX0		—	GQ1	GT4	—	—	6600	
LL4 Diesel 6.2 Liter V8 (379 Cu In) (Reqs B3J & C6P)	MM4			—	—	GQ1	GT5	—	8600	
		MX1		—	—	—	GQ1	—	8600	
-C20943										
L25 L6 4.8 Liter (292-188L)	MM4			—	—	—	GQ1	HC4	8600	
LT9 V8 5.7 Liter (350-488L)	MM4			—	—	GQ1	GT5	—	8600	
		MX1		—	—	—	GQ1	HC4	8600	
LE8 V8 7.4 Liter (454-488L) (Reqs N41 & UA1)	MM4	MX1		#GQ1	—	GT4	GT5	—	8600	
LL4 Diesel 6.2 Liter V8 (379 Cu In)(Reqs B3J)	MM4			—	—	GQ1	GT5	—	8600	
		MX1		—	—	—	GQ1	HC4	8600	

#N/A G80 Locking Differential; w/LE8 Eng Rear Axle is 3.21

%Reqs KC4 Eng Oil Cooler

C/K PICKUP

POWER TEAMS

ALL STATES EXCEPT CALIFORNIA

C-K20/2500 SERIES

ENGINE	TRANSMISSION		AXLES					GVW	
	4-SP	AUTO		#323	342	373	410		456
W/N/A8 HIGH ALTITUDE EMISSION EQUIPMENT ■									
-C20903									
LB1 V6 4.3 Liter (262-488L) (N/A C6P)	MM4	MX0		—	—	%GQ1	%GT5	—	64/7200
LE9 V8 5.0 Liter (305-488L)(N/A C6P)	MM4	MX0		—	GQ1	GT4	—	—	64/7200
LH6 Diesel 6.2 Liter V8(379 Cu In) (N/A C6P) (Reqs 83J)	MM4	MX0		—	GQ1	GT4	—	—	6400
	MM4			—	—	GQ1	GT5	—	7200
		MX0		—	GQ1	GT4	—	—	7200
LL4 Diesel (379 Cu in)(Reqs 83J&C6P)	MM4			—	—	GQ1	GT5	—	8600
		MX1		—	—	—	GQ1	HC4	8600
-K20903									
LS9 V8 5.7 Liter (350-488L)(N/A C6P)	MM4			#GQ1	GU6	—	—	—	6600
		MX0		—	GQ1	GT4	—	—	6600
LH6 Diesel 6.2 Liter V8(379 Cu In) (N/A C6P)(Reqs 83J)	MM4			—	—	GQ1	GT5	—	6600
		MX0		—	GQ1	GT4	—	—	6600
LL4 Diesel 6.2 Liter V8 (Reqs 83J&C6P)	MM4			—	—	GQ1	GT5	—	8600
		MX1		—	—	—	GQ1	—	8600
-C20943									
LL4 Diesel 6.2 Liter V8 (379 Cu In)(Req 83J)	MM4			—	—	GQ1	GT5	—	8600
		MX1		—	—	—	GQ1	HC4	8600

#N/A G80 Locking Differential; w/LE8 Eng Rear Axle is 3.21

%Reqs KC4 Eng Oil Cooler

■ High Altitude Emission Equipment (FOR EXHAUST SMOKE REDUCTION PURPOSES
AT HIGH ALTITUDE: NOT REQUIRED TO SATISFY HIGH ALTITUDE REGULATIONS) (REQS LL4 ENG)

C/K PICKUP
POWER TEAMS
CALIFORNIA ONLY
C-K20/2500 SERIES

POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE)
(Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

ENGINE	TRANSMISSION			AXLES					GVW
	4-SP	AUTO			#3.23	3.42	3.73	4.10	
W/YF5 California Emission Requirements									
-C20903									
L25 L6 4.8 Liter (292-1BBL)(Reqs C6P)	MM4			-	-	-	GQ1	HC4	8600
LS9 V8 5.7 Liter (350-4BBL)(N/A C6P)		MX0		#GQ1	GU6	-	-	-	64/7200
LT9 V8 5.7 Liter (350-4BBL)(Reqs C6P)	MM4			-	GQ1	GT4	GT5	-	8600
		MX1		-	-	-	GQ1	HC4	8600
LE8 V8 7.4 Liter (454-4BBL) (Reqs C6P, N41&UA1)	MM4	MX1		#GQ1	-	GT4	GT5	-	8600
LH6 Diesel 6.2 Liter V8 (379 Cu In)(Reqs B3J)		MX0		#GQ1	GU6	-	-	-	6400
		MX0		-	GQ1	-	-	-	7200
LL4 Diesel (379 Cu In)(Reqs B3J&C6P)	MM4			-	-	GQ1	GT5	-	8600
		MX1		-	-	-	GQ1	HC4	8600
-K20903									
L25 L6 4.8 Liter (292-1BBL)(Reqs C6P)	MM4			-	-	-	GQ1	-	8600
LT9 V8 5.7 Liter (350-4BBL)(Reqs C6P)	MM4			-	GQ1	GT4	GT5	-	8600
		MX1		-	-	-	GQ1	-	8600
LL4 Diesel 6.2 Liter V8 (379 Cu In)(Reqs B3J&C6P)	MM4			-	-	GQ1	GT5	-	8600
		MX1		-	-	-	GQ1	-	8600
-C20943									
L25 L6 4.8 Liter (292-1 BBL)	MM4			-	-	-	GQ1	HC4	8600
LT9 V8 5.7 Liter (350-4BBL)	MM4			-	-	GQ1	GT5	-	8600
		MX1		-	-	-	GQ1	HC4	8600
LE8 V8 7.4 Liter (454-4BBL) (Reqs N41&JA1)	MM4	MX1		#GQ1	-	GT4	GT5	-	8600
LL4 Diesel 6.2 Liter V8 (379 Cu In)(Reqs B3J)	MM4			-	-	GQ1	GT5	-	8600
		MX1		-	-	-	GQ1	HC4	8600

#N/A G80 Locking Differential:w/LE8 Eng Rear Axle is 3.21

C/K PICKUP
POWER TEAMS
ALL STATES
C-K30/3500 SERIES

POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE)
 (Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

W/NA5 STANDARD (Satisfies High Altitude Emission Requirements), NA6 HIGH ALTITUDE OR YF5 CALIFORNIA EMISSION

ENGINE	TRANSMISSION		AXLES				GVWR
	4-SP	AUTO	#3.21	3.73	4.10	4.56	
-C30903							
#125 L6 4.8 Liter (292-1BBL)	MM4		—	—	GQ1	HC4	9000
		MX1	—	—	—	GQ1	9000
#179 V8 5.7 Liter (350-4BBL)	MM4		—	GQ1	GT5	HC4	9000
		MX1	—	—	GQ1	HC4	9000
	MM4	%MX1	—	—	GQ1	HC4	#10000
#1E8 V8 7.4 Liter (454-4BBL) (Reqs N41 & UA1)	MM4	MX1	#GQ1	GT4	GT5	*HC4	9000
	MM4	%MX1	—	GQ1	GT5	*HC4	#10000
LL4 Diesel 5.2 Liter V8 (379 Cu In) (Reqs B3J)	MM4	MX1	—	—	GQ1	HC4	9000
	MM4	%MX1	—	—	GQ1	HC4	#10000
-C30943							
#125 L6 4.8 Liter (292-1BBL)	MM4		—	—	GQ1	HC4	9000
		MX1	—	—	—	GQ1	9000
#179 V8 5.7 Liter (350-4BBL)	MM4		—	GQ1	GT5	HC4	9000
		MX1	—	—	GQ1	HC4	9000
	MM4	MX1	—	—	GQ1	HC4	9600
	MM4	%MX1	—	—	GQ1	HC4	#10000
#1E8 V8 7.4 Liter (454-4BBL) (Reqs UA1 & N41)	MM4	MX1	#GQ1	GT4	GT5	*HC4	90/9600
	MM4	%MX1	—	GQ1	GT5	*HC4	#10000
LL4 Diesel 6.2 Liter V8 (379 Cu In) (Reqs B3J)	MM4	MX1	—	—	GQ1	HC4	90/9600
	MM4	%MX1	—	—	GQ1	HC4	#10000
-K30903							
#125 L6 4.8 Liter (292-1BBL)	MM4	MX1	—	—	—	GQ1	9200
#179 V8 5.7 Liter (350-4BBL)	MM4		—	GQ1	GT5	HC4	9200
		MX1	—	—	GQ1	HC4	9200
	MM4	%MX1	—	—	GQ1	HC4	#10000
#1E8 V8 7.4 Liter (454-4BBL) (Reqs UA1)	MM4	MX1	—	GQ1	GT5	*HC4	9200
	MM4	%MX1	—	GQ1	GT5	*HC4	#10000
LL4 Diesel 6.2 Liter V8 (379 Cu In) (Reqs B3J)	MM4	MX1	—	—	GQ1	HC4	9200
	MM4	%MX1	—	—	GQ1	HC4	#10000
-K30943							
#125 L6 4.8 Liter (292-1BBL)	MM4	MX1	—	—	—	GQ1	9200
#179 V8 5.7 Liter (350-4BBL)	MM4		—	GQ1	GT5	HC4	9200
		MX1	—	—	GQ1	HC4	9200
	MM4	%MX1	—	—	GQ1	HC4	#10000
#1E8 V8 7.4 Liter (454-4BBL) (Reqs UA1)	MM4	MX1	—	GQ1	GT5	*HC4	9200
	MM4	%MX1	—	GQ1	GT5	*HC4	#10000
LL4 Diesel 6.2 Liter V8 (379 Cu In) (Reqs B3J)	MM4	MX1	—	—	GQ1	HC4	9200
	MM4	%MX1	—	—	GQ1	HC4	#10000

*Reqs V02 Cooler
 #N/A G80 Locking Differential
 *W/MX1 Trans and C60 Air Reqs KC4 Cooler
 #N/A NA6 High Altitude Emissions. With NA5 Emissions Satisfies High Altitude Requirements

High Altitude Emission Equipment (FOR EXHAUST SMOKE REDUCTION PURPOSES)
 AT HIGH ALTITUDE; NOT REQUIRED TO SATISFY HIGH ALTITUDE EMISSION REGULATIONS. (EXC. LL4 DIESEL)

C/K PICKUP

GVWR SELECTOR—ALL STATES

GVWR Rating (lbs)	+GAWR (lbs)		Minimum Equipment Required for GVW Rating		
	Front	Rear	Tire Capacity (lbs ea)		Chassis Equipment
			Front	Rear	
C10/C1500 SERIES					
●4900	2684	2684	1342	1342	Standard
■5200	2906	2906	1453	1453	■Power Brakes (J50)
★6000	★2950	3406	1703	1703	HD Rear Springs (G5C); ■Power Brakes (J50)
●100	★3250	3686	1843	1843	Extra Capacity Rear Springs (G51); HD Power Brakes (J55)
K10/K1500 SERIES					
●100	3550	3550	1775	1775	Standard

†GAWR's shown are the maximum for each axle with equipment listed. Other GAWR's are available, and they are determined as the minimum capacity of either axle, springs or tires.

● Not available on diesel engine models.

■ Standard on diesel engine models.

★ Rated 3400 lbs. for diesel engine models.

FRONT AND REAR TIRE AVAILABILITY CHART—ALL STATES

C-K10/1500 SERIES

Spare tire to match either front or rear tires must be ordered
K10/1500 models require matching front and rear tread

Description	Capacity (lbs ea)	Highway		On-Off Road		Spare
		Front	Rear	*Front	Rear	
TUBELESS						
♦*P195/75R15 Steel Belted Radial	1342	XAR	YAR	—	—	ZAR
♦*P195/75R15 White Wall Steel Belted Radial	1342	XAS	YAS	—	—	ZAS
♦*P195/75R15 Fiberglass Belted Radial	1342	XYP	YYP	—	—	ZYP
#P205/75R15 Steel Belted Radial	1453	XCE	YCE	—	—	ZCE
#P205/75R15 White Wall Steel Belted Radial	1453	XCG	YCG	—	YJT	ZJT
#P225/75R15 Steel Belted Radial	1703	XET	YET	—	—	ZET
#P225/75R15 White Wall Steel Belted Radial	1703	XEU	YEU	—	—	ZEU
P235/75R15 Steel Belted Radial	1843	XFL	YFL	—	—	ZFL
P235/75R15 White Wall Steel Belted Radial	1843	XEM	YEM	*XES	YES	ZES
P235/75R15 White Letter Steel Belted Radial	1843	*XFN	*YFN	—	—	*ZFN
%LR60-15B White Letter Rayon Belted Radial	1790	XTS	YTS	*XEB	*YEB	*ZEB
▲31 x 10.50R15LT/B Steel Belted Radial	1775	—	—	*XUY	*YUY	*ZUY
▲31 x 10.50R15LT/B White Letter Steel Belted Radial	1775	—	—	*XUZ	*YUZ	*ZUZ

#Available on C1 models only.

♦Not available with B3J Diesel Equipment.

*Available on K1 models only.

%Available on C10703 only. Requires N67, N90 or PA6 wheels.

▲Requires N67, N90 or PA6 wheels.

C/K PICKUP

GVWR SELECTOR—ALL STATES

GVW Rating (lbs)	+GAWR (lbs)		Minimum Equipment Required for GVW Rating		
			Tire Capacity (lbs ea)		Chassis Equipment
	Front	Rear	Front	Rear	
C20/2500 SERIES REGULAR CAB					
6400	3500	3880	1940	1940	Standard
7200	3500	4630	1940	2315	HD Rear Springs (G50)
C20/2500/C6P SERIES REGULAR CAB					
8600	3800	6000	2623	3042	Standard
K20/2500 SERIES REGULAR CAB					
6600	3700	3880	1940	1940	Standard
K20/2500/C6P SERIES REGULAR CAB					
8600	3700	6000	2623	3042	Standard
C20/2500 SERIES BONUS AND CREW CAB					
8600	3800	6000	2623	3042	Standard

+GAWR's shown are the maximum for each axle with equipment listed. Other GAWR's are available, and they are determined as the minimum capacity of either axle, springs or tires.

FRONT AND REAR TIRE AVAILABILITY CHART—ALL STATES

C-K20/2500 SERIES

Spare tire to match either front or rear tires is available at extra cost
K20/2500 models require matching front and rear tread

Description	Capacity (lbs ea)	Highway		On-Off Road		Spare
		Front	Rear	*Front	Rear	
TUBELESS (Requires LE1, LE9, LE6 or LE9 engine.)						
7.50R-16D Steel Belted Radial	2440	XWY — —	YWY — —	— *XWX —	— YWX #YWX	ZWY ZWX #ZWY
LT 215/85R16C Steel Belted Radial	1940	XYJ	YYJ	—	—	ZYJ
LT 215/85R16C Steel Belted Radial	1940	XYJ	—	—	—	—
LT 215/85R16D Steel Belted Radial	2315	— —	YYK — —	— — —	— #YYL #YYL	ZYK #ZYL #ZYK
LT 215/85R16D Steel Belted Radial	2315	XYK — —	YYK — —	— *XYL —	— YYL #YYL	ZYK ZYL #ZYK
LT 235/85R16D Steel Belted Radial	2623	XYM	YYM	—	—	ZYM
ALT 235/85R16E Steel Belted Radial	3042	XYN	YYN	—	—	ZYN
TUBELESS (Requires LE8, LT8, LL4 or L25 engine.)						
LT 235/85R16D Steel Belted Radial	2623	XYM	—	—	—	—
LT 235/85R16E Steel Belted Radial	3042	— —	YYN —	— —	#YYT #YYT	ZYN ZYT
LT 235/85R16E Steel Belted Radial	3042	XYN — —	YYN — —	— *XYT —	— YYT #YYT	ZYN ZYT #ZYN

*On-Off road front tires available on K2 models only.

#Not available on K2 models.

▲Available on K2 models only.

C/K PICKUP GVWR SELECTOR—ALL STATES

GVW Rating (lbs)	†GAWR (lbs)		Minimum Equipment Required for GVW Rating		
			Tire Capacity (lbs ea)		Chassis Equipment
	Front	Rear	Front	Rear	
C30/3500 SERIES REGULAR CAB					
9000	3800	6084	2623	3042	Standard
*10,000	3800	7056	1940	1764 (Duals)	Dual Rear Wheel Provisions (R05)
C30/3500 SERIES BONUS CAB AND CREW CAB					
9000	4000	6084	2623	3042	Standard
*9600	4000	6084	2623	3042	Camper Special Chassis Equipment (Z81)
*10,000	3880	7500	1940	2105 (Duals)	Dual Rear Wheel Provisions (R05)
K30/3500 SERIES REGULAR CAB					
9200	4500	6084	2623	3042	Standard
*10,000	4500	7500	2315	2105 (Duals)	Dual Rear Wheel Provisions (R05)
K30/3500 SERIES BONUS CAB AND CREW CAB					
9200	4500	6084	2623	3042	Standard
*10,000	4500	7500	2315	2105 (Duals)	Dual Rear Wheel Provisions (R05)

†GAWR's shown are the maximum for each axle with equipment listed. Other GAWR's are available, and they are determined as the minimum capacity of either axle, springs or tires.

*Requires V8 engine.

*Fleetside/Wideside Pickups only.

FRONT AND REAR TIRE AVAILABILITY CHART—ALL STATES

C-K30/3500 SERIES

Spare tire to match either front or rear tires is available at extra cost
K30/3500 models require matching front and rear tread

Description	Capacity (lbs each)		Highway			On-Off Road			Spare
	Front/ Single Rear	Dual Rear	Front	Single Rear	Dual Rear	*Front	Single Rear	Dual Rear	
TUBELESS Steel Belted Radial									
*LT215/85R16C	1940	1764	XYJ	—	YYJ	—	—	—	ZYJ
*LT215/85R16C	1940	—	XYJ	—	—	—	—	—	—
*LT215/85R16D	—	2105	—	—	YYK	—	—	— YYL YYL	ZYK ZYL ZYK
LT215/85R16D	2315	2105	KYK — —	— — —	YYK — —	— *XYL —	— — —	— YYL *YYL	ZYK ZYL *ZYK
LT235/85R16D	2623	—	KYM	—	—	—	—	—	—
LT235/85R16E	3042	—	KYN	YYN	—	— *XYT	— †YYT	— —	ZYN †ZYT
TUBE-TYPE Nylon									
*7.50-16C	2060	1815	XPB — —	— — —	YPB — —	— — —	— — —	— YPC YPC	ZPB ZPC ZPB
*7.50-16C	2060	—	XPB	—	—	—	—	—	—
*7.50-16D	—	2140	— — —	— — —	YPF — —	— — —	— — —	— YPG YPG	ZPF ZPG ZPF
7.50-16D	2440	2140	XPF — —	— — —	YPF — —	— *XPG —	— — —	— YPG *YPG	ZPF ZPG *ZPF

#C3 models only.

*On-Off road front tires available on K3 models only.

†K3 models only.

*C30903 models only.

NOTES

C/K PICKUPS

THE FOLLOWING EQUIPMENT IS STANDARD ON DIESEL ENGINE MODELS (ALSO SEE STANDARD SPECIFICATIONS PAGES)

- Low Coolant Sensor
- Poly-wrapped Paper Element Air Cleaner
- Auxiliary Engine Oil Cooler provided with 4.56 ratio rear axle (in addition to cooler in radiator tank)
- Power Steering
- Engine Block Heater
- Water/fuel separator unit which incorporates a water sensor and sending unit, a fuel filter, a fuel heater and water drain capability
- Hydraulic Power-assisted Brakes
- K81 66-amp Generator
- Engine Oil Cooler (located in radiator tank)
- Dual 550 Cold Cranking Amp/115 min. Reserve Capacity Batteries
- HD Radiator
- Dual Exhaust System
- Additional Insulation:
 - Cab-to-fender insulators
 - Fiberglass hood insulator
 - Fiberglass engine compartment firewall insulator
 - Cowl side spray-on deadener
 - Driver compartment dash mat with increased mastic layer
 - Resinated cotton and mastic floor insulation
 - Full cowl interior trim panels with resinated cotton insulation
 - Vinyl-coated rubber floor mat for regular cab models
- Warning Lights: Glow Plugs, Water-in-fuel (or fuel filter), and Low Coolant
- Diesel Engine Identification:
 - Hood ornament
 - Fender nameplates
 - Tailgate nameplate (Fleetside/Wideside models only)
 - "Diesel Fuel Only" filler cap and label

C-K PICKUP
2-WHEEL DRIVE (4900-lb - 10,000-lb GVW)
4-WHEEL DRIVE (6100-lb - 10,000-lb GVW)
1985 VEHICLES WITH STANDARD EQUIPMENT

Description	Model Number	Body Code	Wheel Base	Factory D&H(a)	List Price	Mfr's Suggested Retail Price*	Group Number
<i>(All models have regular cab unless otherwise indicated)</i>							
◆ 6-Cylinder 4.3 Liter (262 Cu. In.) 4 BBL V6 Gasoline Engine-Engine Ordering Code LB1							
C10/C1500 Series 2-Wheel Drive							
Stepside/Fenderside (6 1/2-ft)	CC/TC10703	E62	117.5"				
Fleetside/Wideside (6 1/2-ft)	CC/TC10703	E63	117.5"				
Fleetside/Wideside (8-ft)	CC/TC10903	E63	131.5"				
C20/C2500 Series 2-Wheel Drive							
Stepside/Fenderside (8-ft)	CC/TC20903	E62	131.5"				
Fleetside/Wideside (8-ft)	CC/TC20903	E63	131.5"				
K10/K1500 Series 4-Wheel Drive							
Stepside/Fenderside (6 1/2-ft)	CK/TK10703	E62	117.5"				
Fleetside/Wideside (6 1/2-ft)	CK/TK10703	E63	117.5"				
Fleetside/Wideside (8-ft)	CK/TK10903	E63	131.5"				
◆ 6-Cylinder 4.8 Liter (292 Cu. In.) 1 BBL L6 Gasoline Engine-Engine Ordering Code L25							
C20/C2500 Series H.D. Chassis 2-Wheel Drive							
Stepside/Fenderside (8-ft)	CC/TC20903	E62 & C6P	131.5"				
Fleetside/Wideside (8-ft)	CC/TC20903	E63 & C6P	131.5"				
C20/C2500 Series 2-Wheel Drive							
Bonus Cab	CC/TC20943	E63 & YG4	164.5"				
Crew Cab	CC/TC20943	E63 & AS3	164.5"				
C30/C3500 Series 2-Wheel Drive							
Stepside/Fenderside (8-ft)	CC/TC30903	E62	131.5"				
Fleetside/Wideside (8-ft)	CC/TC30903	E63	131.5"				
Bonus Cab	CC/TC30943	E63 & YG4	164.5"				
Crew Cab	CC/TC30943	E63 & AS3	164.5"				
K20/K2500 Series H.D. Chassis 4-Wheel Drive							
Stepside/Fenderside (8-ft)	CK/TK20903	E62 & C6P	131.5"				
Fleetside/Wideside (8-ft)	CK/TK20903	E63 & C6P	131.5"				
K30/K3500 Series 4-Wheel Drive							
Fleetside/Wideside (8-ft)	CK/TK30903	E63	131.5"				
Bonus Cab	CK/TK30943	E63 & YG4	164.5"				
Crew Cab	CK/TK30943	E63 & AS3	164.5"				

★ Manufacturer's Suggested Retail Prices do not include applicable destination charges, state and local taxes, license fees, optional equipment or special items or services.

◆ Refer to Power Team Chart for California Emission Certification Requirements.

MODELS CONTINUED ON FOLLOWING PAGE

C-K PICKUP

1985 VEHICLES WITH STANDARD EQUIPMENT

Description	Model Number	Body Code	Wheel Base	Factory D&H(a)	List Price	Mfr's Suggested Retail Price★	Group Number
◆ 8-Cylinder 5.7 Liter (350 Cu. In.) 4 BBL V8 Gasoline Engine-Engine Ordering Code LS9							
K20/K2500 Series 4-Wheel Drive							
Stepside/Fenderside (8-ft) ..	CK/TK20903	E62	131.5"				
Fleetside/Wideside (8-ft) ...	CK/TK20903	E63	131.5"				
◆ 8-Cylinder 6.2 Liter (379 Cu. In.) L.D. Diesel V8 Engine-Engine Ordering Code LH6							
C10/C1500 Series 2-Wheel Drive							
Stepside/Fenderside (6 1/2-ft) ..	CC/TC10703	E62 & B3J	117.5"				
Fleetside/Wideside (6 1/2-ft) ..	CC/TC10703	E63 & B3J	117.5"				
Fleetside/Wideside (8-ft) ...	CC/TC10903	E63 & B3J	131.5"				
C20/C2500 Series 2-Wheel Drive							
Stepside/Fenderside (8-ft) ..	CC/TC20903	E62 & B3J	131.5"				
Fleetside/Wideside (8-ft) ...	CC/TC20903	E63 & B3J	131.5"				
K10/K1500 Series 4-Wheel Drive							
Stepside/Fenderside (6 1/2-ft) ..	CK/TK10703	E62 & B3J	117.5"				
Fleetside/Wideside (6 1/2-ft) ..	CK/TK10703	E63 & B3J	117.5"				
Fleetside/Wideside (8 ft) ...	CK/TK10903	E63 & B3J	131.5"				
K20/K2500 Series 4-Wheel Drive							
Stepside/Fenderside (8-ft) ..	CK/TK20903	E62 & B3J	131.5"				
Fleetside/Wideside (8-ft) ...	CK/TK20903	E63 & B3J	131.5"				
◆ 8-Cylinder 6.2 Liter (379 Cu. In.) H.D. Diesel V8 Engine-Engine Ordering Code LL4							
C20/C2500 Series H.D. Chassis 2-Wheel Drive							
Stepside/Fenderside (8-ft) ..	CC/TC20903	E62 & C6P & B3J	131.5"				
Fleetside/Wideside (8-ft) ...	CC/TC20903	E63 & C6P & B3J	131.5"				
C20/C2500 Series 2-Wheel Drive							
Bonus Cab	CC/TC20943	E63 & YG4 & B3J	164.5"				
Crew Cab	CC/TC20943	E63 & AS3 & B3J	164.5"				
C30/C3500 Series 2-Wheel Drive							
Stepside/Fenderside (8-ft) ..	CC/TC30903	E62 & B3J	131.5"				
Fleetside/Wideside (8-ft) ...	CC/TC30903	E63 & B3J	131.5"				
Bonus Cab	CC/TC30943	E63 & YG4 & B3J	164.5"				
Crew Cab	CC/TC30943	E63 & AS3 & B3J	164.5"				
K20/K2500 Series H.D. Chassis 4-Wheel Drive							
Stepside/Fenderside (8-ft) ..	CK/TK20903	E62 & C6P & B3J	131.5"				
Fleetside/Wideside (8-ft) ...	CK/TK20903	E63 & C6P & B3J	131.5"				
K30/K3500 Series 4-Wheel Drive							
Fleetside/Wideside (8-ft) ...	CK/TK30903	E63 & B3J	131.5"				
Bonus Cab	CK/TK30943	E63 & YG4 & B3J	164.5"				
Crew Cab	CK/TK30943	E63 & AS3 & B3J	164.5"				

★ Manufacturer's Suggested Retail Prices do not include applicable destination charges, state and local taxes, license fees, optional equipment or special items or services.

◆ Refer to Power Train Chart for California Emission Certification Requirements.

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price ◇
Scottsdale/High Sierra: (See Interior and Exterior Color Selection Charts) Available only when deluxe cloth or custom vinyl seats are specified on Regular Cab. Includes bright rear window and windshield moldings, bright side marker lamp bezels, nameplates on front fenders and instrument panel, U37 Cigarette Lighter, dual horns, cab back insulation, C91 Dome Lamp, special insulation and color-keyed vinyl coated floor mat.				
Stepside/Fenderside only. Also includes plastic door trim panels	Z62			
Fleetside/Wideside only. Also includes bright taillight trim.				
Without R05 Dual Rear Wheels.				
Regular Cab only. Also includes plastic door trim panels				
Without YJ6 Value Decor Package or ZY6 Custom Two-Tone Paint. Also includes B84 Black Side Moldings.	Z62			
Bonus Cab only	Z62			
Crew Cab only	Z62			
Regular Cab only. Also includes plastic door trim panels				
With YJ6 Value Decor Package or ZY6 Custom Two-Tone Paint	Z62			
With R05 Dual Rear Wheels.				
Regular Cab only. Also includes plastic door trim panels	Z62			
Bonus Cab only	Z62			
Crew Cab only	Z62			
Silverado/Sierra Classic: Available only when custom cloth or custom vinyl seats are specified. Includes bright side marker lamp bezels, nameplates on front fenders, bright windshield and rear window moldings, color-keyed carpeting for front seat area, plastic door trim panels with storage pockets and bright brushed-finish accents, V22 Deluxe Front Appearance, nameplate on deluxe instrument panel, U37 Cigarette Lighter, visor vanity mirror, custom steering wheel, headliner, C91 Dome Lamp, cab back insulation, Z53 Voltmeter, Temperature and Oil Pressure Gages, dual horns and special insulation.				
Stepside/Fenderside only. Also includes cab back panel applique molding				
Regular Cab only	YE9			
Fleetside/Wideside only. Also includes bright taillight trim.				
Without R05 Dual Rear Wheels.				
Regular Cab only.				
Without ZY3 Special Two-Tone, ZY4 Deluxe Two-Tone ZY5 Exterior Decor Package or ZY6 Custom Two-Tone. Also includes cab back panel applique molding, YG3 Deluxe Molding Package and tailgate applique.	YE9			
With ZY5 Exterior Decor Package	YE9			
With ZY6 Custom Two-Tone Paint. Also includes B96 Wheel Opening Moldings	YE9			
Bonus Cab only.				
Without ZY5 Exterior Decor Package. Also includes cab back panel applique molding	YE9			
With ZY5 Exterior Decor Package	YE9			
Crew Cab only. Also includes rear seat area carpeting				
Without ZY5 Exterior Decor Package. Also includes cab back panel applique molding	YE9			
With ZY5 Exterior Decor Package	YE9			
With R05 Dual Rear Wheels.				
Regular Cab only.				
Without ZY9 Big Dooley Special Two-Tone Paint. Also includes cab back panel applique molding	YE9			
With ZY9 Big Dooley Special Two-Tone Paint	YE9			
Bonus Cab only. Also includes cab back insulation				
Without ZY9 Big Dooley Special Two-Tone Paint. Also includes cab back panel applique molding	YE9			
With ZY9 Big Dooley Special Two-Tone Paint	YE9			
Crew Cab only. Also includes rear seat area carpeting and cab back insulation				
Without ZY9 Big Dooley Special Two-Tone Paint. Also includes cab back panel applique molding	YE9			
With ZY9 Big Dooley Special Two-Tone Paint	YE9			

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(s)	List Price	Mfr's Suggested Retail Price ◊
Seat Trim: (See Interior and Exterior Color Selection Chart for availability and ordering information).				
V**1 Vinyl Bench	...			
C**1 Deluxe Cloth Bench. Regular Cab only. Not available when YE9 is specified				
Without Z62	...			
With Z62	...			
L**1 Custom Cloth Bench.				
Regular Cab only. Available only when YE9 is specified	...			
Bonus Cab only. Available only when Z62 or YE9 is specified.				
With Z62	...			
With YE9	...			
Crew Cab only. Available only when Z62 or YE9 is specified.				
With Z62	...			
With YE9	...			
X**1 Custom Vinyl Bench				
Regular Cab only				
Without Z62 or YE9	...			
With Z62 or YE9	...			
Bonus Cab only.				
With Z62	...			
With YE9	...			
Crew Cab only.				
With Z62	...			
With YE9	...			
Paints, Exterior: (See Interior and Exterior Color Selection Chart for ordering information and paint application).				
Solid				ZY1
Conventional Two-Tone.				
Regular Cab only.				
Without YE9. Includes cab back panel applique moldings	...			ZY2
With YE9	...			ZY2
Bonus Cab or Crew Cab only				
Without YE9. Includes cab back panel applique moldings	...			ZY2
With YE9	...			ZY2
Special Two-Tone. Fleetside/Wideside only.				
Regular Cab only				
Without Z62 or YE9. Includes YG1 Custom Molding Package	...			ZY3
With Z62	...			ZY3
With YE9	...			ZY3
Bonus Cab or Crew Cab only.				
Without Z62 or YE9. Includes YG1 Custom Molding Package	...			ZY3
With Z62	...			ZY3
With YE9	...			ZY3
Deluxe Two-Tone. Fleetside/Wideside only.				
Regular Cab only.				
Without Z62 or YE9. Includes YG1 Custom Molding Package	...			ZY4
With Z62	...			ZY4
With YE9	...			ZY4
Bonus Cab or Crew Cab only.				
Without Z62 or YE9. Includes YG1 Custom Molding Package	...			ZY4
With Z62	...			ZY4
With YE9	...			ZY4
Custom. Two-Tone. Fleetside/Wideside. Regular Cab only. Not available when B84, B85, YG1 or YG3 moldings are specified. Also not available when R05 Dual Rear Wheels is specified. Includes dual-tone body side and rear decal striping. Also includes hood ornament when B3J Diesel Equipment is not specified.				ZY6
Exterior Decor Package. Fleetside/Wideside only. Bonus and Crew Cab only. Not available when R05 Dual Rear Wheels is specified. Includes dual-tone body side and rear decal striping. Also includes hood ornament when B3J Diesel Equipment is not specified.				
Bonus Cab or Crew Cab only.				
Without Z62 or YE9. Includes YG1 Custom Molding Package	...			ZY5
With Z62	...			ZY5
With YE9	...			ZY5

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price◇
Paints, Exterior: (Continued)				
<i>Special Big Dooley Two-Tone.</i> Fleetside/Wideside only. Available only when R05 Dual Rear Wheels are specified. Includes dual-tone body side and rear decal striping. Also includes hood ornament when B3J Diesel Equipment is not specified.				
Without Z62	ZY9			
With Z62	ZY9			
Emission Systems: Dealer Note - One of the following emission options must be specified (See Power Teams Chart for availability and complete specifications).				
<i>California Emission Requirements.</i> Includes all testing, equipment and/or certification necessary for registration in the State of California. Not available when NA6 High Altitude Emissions is specified.				
With LB1 4.3 Liter, LF3 5.7 Liter or LS9 5.7 Liter Engine	YF5			
With L25 4.8 Liter, LT9 5.7 Liter or LE8 7.4 Liter Engine	YF5			
With B3J Diesel Equipment	YF5			
<i>High Altitude Emission Equipment.</i> Available only when LE9 5.0 Liter, LB1 4.3 Liter, LS9 5.7 Liter Engine or B3J Diesel Equipment is specified. Not available when NA5 Standard or YF5 California Emissions is specified.	NA6			
<i>Standard Emission Equipment.</i> Not available when LF3 5.0 Liter Engine on C1 or LS9 5.7 Liter Engine on K1-2 series is specified. Also not available when NA6 High Altitude or YF5 California Emissions are specified	NA5			
Engines: (See Power Teams Chart for availability and complete specifications).				
Gasoline				
4.3 Liter (262 Cu. In.) 4 BBL V6. C-K1 or C2 Series without C6P H.D. Chassis	LB1			
4.8 Liter (292 Cu. In.) 1 BBL L6. C-K2 Series with C6P H.D. Chassis or C-K3 Series	L25			
5.0 Liter (305 Cu. In.) 4 BBL V8. C-K1 or C2 Series only. Not available when C6P H.D. Chassis is specified	LE9			
5.0 Liter (305 Cu. In.) 4 BBL V8. C1 Series only. Available only when YF5 California Emissions Requirements and MX0 Automatic Overdrive Transmission are specified	LF3			
5.7 Liter (350 Cu. In.) 4 BBL V8. Standard on K2 Series without C6P H.D. Chassis. Not available on C1 Series, C2 Bonus and Crew Cab or C-K3 Series K1 Series only. Available only when YF5 California Emissions is specified	LS9			
C2 Regular Cab. Available only when YF5 California Emissions Requirements is specified. Not available when C6P H.D. Chassis is specified	LS9			
5.7 Liter (350 Cu. In.) 4 BBL V8. Available on C6P H.D. Chassis, C2 Bonus and Crew Cab or C-K3 Series	LT9			
7.4 Liter (454 Cu. In.) 4 BBL V8. C2-3 or K3 Series only. Available only when UA1 H.D. Battery is specified.				
C2-3 Series only. Available only when N41 Power Steering is specified. C2 Regular Cab also available only when C6P H.D. Chassis is specified	LE8			
K3 Series	LE8			
Diesel				
6.2 Liter (379 Cu. In.) L.D. V8 Diesel. C-K1-2 Regular Cab only. Not available when C6P H.D. Chassis is specified. Available only when B3J Diesel Equipment is specified.				
C-K-1, 2 Series only	LH6			
6.2 Liter (379 Cu. In.) H.D. V8 Diesel. C-K2-3 Series only. Available only when B3J Diesel Equipment is specified. C-K2 Regular Cab also available only when C6P H.D. Chassis is specified	LL4			
Transmissions: (See Power Teams Chart for availability and complete specifications).				
3-Speed Automatic				
C1 Series only. Available only when LE9 5.0 Liter or LB1 4.3 Liter Engine is specified	MX1			
C-K2-3 Series only. C-K2 Regular Cab available only when C6P H.D. Chassis is specified	MX1			
	MM3			
3-Speed Manual. C1 Series only				
4-Speed Manual. Standard on C-K2-3 Series. Standard on K1 Series				
C1 Series. Not available when LF3 5.0 Liter or LS9 5.7 Liter Engine is specified. Also not available when YF5 California Emissions is specified				
C1 Series without B3J Diesel Equipment	MM4			
C1 Series with B3J Diesel Equipment	MM4			

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price◇
Transmissions: (Continued)				
4-Speed Manual with Overdrive. Standard on C1 Series when B3J Diesel Equipment is specified.				
C1 Series when gasoline engines are specified.	MM7			
4-Speed Automatic with Overdrive. Not available when C6P H.D. Chassis is specified. C-K1-2 Regular Cab only	MXO			
Axles, Rear: (See Power Teams Chart for option number selection, availability and complete specifications)				
Optional Ratio				
Locking Differential	G80			
Tires: (See Tire Charts for Tire Availability)				
Spare tire carrier included when spare tire is specified on C-K-2,3 series				
All rim sizes are 6.00" except when N67, N90 or PA6 Wheels are specified on C-K1 Series.				
All rim sizes are 6.50" on C-K2 Series or C-K3 Series without R05 Dual Rear Wheels.				
All rim sizes are 6.00" on C-K3 Series with R05 Dual Rear Wheels.				
Dealer Note: When dual rear tires are specified, R05 Dual Rear Wheels will be applied to the order.				
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTED ON THE INVOICE SEPARATELY				
For complete specifications and ordering information, see "OTHER OPTIONS" Section.				
TUBELESS				
P195/75R15 All Seasons Steel Belted Radial Ply Blackwall				
(Maximum Capacity 1342-lbs)				
C1 Series only Not available when B3J Diesel Equipment is specified.				
Front (Standard)	XAR			
Rear (Standard)	YAR			
Spare (Standard)	ZAR			
P195/75R15 All Seasons Steel Belted Radial Ply Whitewall				
(Maximum Capacity 1342-lbs)				
C1 Series only Not available when B3J Diesel Equipment is specified.				
Front	XAS			
Rear	YAS			
Spare	ZAS			
P195/75R15 Highway Fiberglass Belted Radial Ply Blackwall				
(Maximum Capacity 1342-lbs)				
C1 Series only Not available when B3J Diesel Equipment is specified				
Front	XYP			
Rear	YYP			
Spare	ZYP			
P205/75R15 All Seasons Steel Belted Radial Ply Blackwall				
(Maximum Capacity 1453-lbs)				
C1 Series only.				
Front				
Without B3J Diesel Equipment	XCE			
With B3J Diesel Equipment	XCE			
Rear				
Without B3J Diesel Equipment	YCE			
With B3J Diesel Equipment	YCE			
Spare				
Without B3J Diesel Equipment	ZCE			
With B3J Diesel Equipment	ZCE			

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(s)	List Price	Mfr's Suggested Retail Price ◊
Tires: (Continued)				
<i>P205 /75R15 All Seasons Steel Belted Radial Ply Whitewall</i> (Maximum Capacity 1453-lbs)				
C1 Series only.				
Front				
Without B3J Diesel Equipment	XCG			
With B3J Diesel Equipment	XCG			
Rear				
Without B3J Diesel Equipment	YCG			
With B3J Diesel Equipment	YCG			
Spare				
Without B3J Diesel Equipment	ZCG			
With B3J Diesel Equipment	ZCG			
<i>P205/75R15 On-Off Road Steel Belted Radial Ply Blackwall</i> (Maximum Capacity 1453-lbs)				
C1 Series only				
Rear				
Without B3J Diesel Equipment	YJT			
With B3J Diesel Equipment	YJT			
Spare				
Without B3J Diesel Equipment	ZJT			
With B3J Diesel Equipment	ZJT			
<i>P225/75R15 All Seasons Steel Belted Radial Ply Blackwall</i> (Maximum Capacity 1703-lbs)				
C1 Series only				
Front				
Without B3J Diesel Equipment	XET			
With B3J Diesel Equipment	XET			
Rear				
Without B3J Diesel Equipment	YET			
With B3J Diesel Equipment	YET			
Spare				
Without B3J Diesel Equipment	ZET			
With B3J Diesel Equipment	ZET			
<i>P225/75R15 All Seasons Steel Belted Radial Ply Whitewall</i> (Maximum Capacity 1703-lbs)				
C1 Series only				
Front				
Without B3J Diesel Equipment	XEU			
With B3J Diesel Equipment	XEU			
Rear				
Without B3J Diesel Equipment	YEU			
With B3J Diesel Equipment	YEU			
Spare				
Without B3J Diesel Equipment	ZEU			
With B3J Diesel Equipment	ZEU			
<i>P235/75R15 All Seasons Steel Belted Radial Ply Blackwall</i> (Maximum Capacity 1843-lbs)				
Front				
C1 Series only				
Without B3J Diesel Equipment	XFL			
With B3J Diesel Equipment	XFL			
K1 Series only (Standard)	XFL			
Rear				
C1 Series only				
Without B3J Diesel Equipment	YFL			
With B3J Diesel Equipment	YFL			
K1 Series only (Standard)	YFL			
Spare				
C1 Series only				
Without B3J Diesel Equipment	ZFL			
With B3J Diesel Equipment	ZFL			
K1 Series only. (Standard)	ZFL			

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&M(s)	List Price	Mfr's Suggested Retail Price
Tires: (Continued)				
<i>P235/75R15 On-Off Road Steel Belted Radial Ply Blackwall</i> (Maximum Capacity 1843-lbs)				
Front				
K1 Series only	XES			
Rear				
C1 Series only				
Without B3J Diesel Equipment	YES			
With B3J Diesel Equipment	YES			
K1 Series only	YES			
Spare				
C1 Series only				
Without B3J Diesel Equipment	ZES			
With B3J Diesel Equipment	ZES			
K1 Series only	ZES			
<i>P235/75R15 All Seasons Steel Belted Radial Ply Whitewall</i> (Maximum Capacity 1843-lbs)				
Front				
C1 Series only				
Without B3J Diesel Equipment	XFM			
With B3J Diesel Equipment	XFM			
K1 Series only	XFM			
Rear				
C1 Series only				
Without B3J Diesel Equipment	YFM			
With B3J Diesel Equipment	YFM			
K1 Series only	YFM			
Spare				
C1 Series only				
Without B3J Diesel Equipment	ZFM			
With B3J Diesel Equipment	ZFM			
K1 Series only	ZFM			
<i>P235/75R15 All Seasons Steel Belted Radial Ply White Lettered</i> (Maximum Capacity 1843 lbs)				
C1 Series only				
Front				
Without B3J Diesel Equipment	XFN			
With B3J Diesel Equipment	XFN			
Rear				
Without B3J Diesel Equipment	YFN			
With B3J Diesel Equipment	YFN			
Spare				
Without B3J Diesel Equipment	ZFN			
With B3J Diesel Equipment	ZFN			
<i>P235/75R15 On-Off Road Steel Belted Radial Ply White Lettered</i> (Maximum Capacity 1843-lbs)				
K1 Series only				
Front	XEB			
Rear	YEB			
Spare	ZEB			
<i>LR80-15/8 Highway Rayon Belted Radial Ply White Lettered</i> (Maximum Capacity 1790-lbs) C10703 only. Available only when N67 or PA6 Wheels are specified.				
Front				
Without B3J Diesel Equipment	XTS			
With B3J Diesel Equipment	XTS			
Rear				
Without B3J Diesel Equipment	YTS			
With B3J Diesel Equipment	YTS			
Spare				
Without B3J	ZTS			
With B3J Diesel Equipment	ZTS			

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price◇
Tires: (Continued)				
<i>31 x 10.50R/15LTB On-Off Road Steel Belted Radial Ply Blackwall.</i>				
(Maximum Capacity 1775-lbs)				
K1 Series only. Available only when N67, N90 or PA6 Wheels are specified				
Front	XUY			
Rear	YUY			
Spare	ZUY			
<i>31 x 10.50R/15LTB On-Off Road Steel Belted Radial Ply White Lettered.</i>				
(Maximum Capacity 1775-lbs).				
K1 Series only. Available only when N67, N90 or PA6 Wheels are specified				
Front	XUZ			
Rear	YUZ			
Spare	ZUZ			
<i>7.50R16/D Highway Steel Belted Radial Ply Blackwall</i>				
(Maximum Capacity 2440-lbs). Not available when C6P H.D. Chassis is specified				
Regular Cab only				
Front	XWY			
Rear	YWY			
Spare	ZWY			
<i>7.50R16/D On-Off Road Steel Belted Radial Ply Blackwall</i>				
(Maximum Capacity 2440-lbs). Not available when C6P H.D. Chassis is specified				
Regular Cab only				
Front. K2 Series only	XWX			
Rear	YWX			
Spare	ZWX			
<i>LT215/85R16-C Highway Steel Belted Radial Ply Blackwall</i>				
(Maximum Capacity each. Front or Single Rear 1940-lbs) (Dual Rear 1764-lbs) Not available on C-K2 Regular Cab when C6P H.D. Chassis is specified.				
Front				
C-K2 Regular Cab only (Standard)	XYJ			
C3 Series only. Requires R05 Dual Rear Wheels	XYJ			
Rear				
C-K2 Regular Cab only (Standard)	YYJ			
C3 Regular Cab only Requires R05 Dual Rear Wheels	YYJ			
Spare				
C-K2 Regular Cab only	ZYJ			
C3 Regular Cab only	ZYJ			
<i>LT215/85R16-D Highway Steel Belted Radial Ply Blackwall</i>				
(Maximum Capacity Front or Single Rear 2315-lbs). (Dual Rear 2105-lbs) Not available C-K2 Regular Cab when C6P H.D. Chassis is specified.				
Front				
C-K2 Regular Cab only	XYK			
C-K3 Series only. Requires R05 Dual Rear Wheels	XYK			
Rear				
C-K2 Regular Cab only	YYK			
C-K3 Series only. Requires R05 Dual Rear Wheels	YYK			
Spare				
C-K2 Regular Cab	ZYK			
C-K3 Series only Regular R05 Dual Rear Wheels	ZYK			
<i>LT215/85R16-D On-Off Road Steel Belted Radial Ply Blackwall</i>				
(Maximum Capacity Front or Single Rear 2315-lbs) (Dual Rear 2105 lbs) Not available C-K2 Regular Cab when C6P H.D. Chassis is specified.				
Front				
K2 Series only	XYL			
K3 Series only. Requires R05 Dual Rear Wheels	XYL			
Rear				
C-K2 Regular Cab only	YYL			
C-K3 Series only. Requires R05 Dual Rear Wheels	YYL			
Spare				
C-K2 Regular Cab only	ZYL			
C-K3 Series only. Requires R05 Dual Rear Wheels	ZYL			

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price ◇
Tires: (Continued)				
LT235/85R16-D Highway Steel Belted Radial Ply Blackwall (Maximum Capacity 2623-lbs)				
Front				
C-K2 Regular Cab without C6P H.D. Chassis				XYM
C-K2 Regular Cab with C6P H.D. Chassis or C20943 Bonus and Crew Cab. (Standard)				XYM
C-K3 Series only. (Standard)				XYM
Rear. C-K2 Regular Cab only. Not available when C6P H.D. Chassis is specified				YYM
Spare. C-K2 Regular Cab only. Not available when C6P H.D. Chassis is specified.				ZYM
LT235/85R16-E On-Off Road Steel Belted Radial Ply Blackwall (Maximum Capacity 3042-lbs). C-K2 Regular Cab available only when C6P H.D. Chassis is specified. K3 Series not available when R05 Dual Rear Wheels are specified.				
Front. K2-3 Series only				XYT
Rear. C-K2 or K3 Series only				YYT
Spare. C-K2 or K3 Series only				ZYT
LT235/85R16-E Highway Steel Belted Radial Ply Blackwall (Maximum Capacity 3042-lbs). Available only when C6P H.D. Chassis is specified on C2 Regular Cab. C-K3 not available when R05 Dual Rear Wheels are specified.				
Front				
C2 or C-K3 Series only				XYN
K2 Series only.				
Without C6P H.D. Chassis				XYN
With C6P H.D. Chassis				XYN
Rear				
C2 or C-K3 Series only (Standard)				YYN
K2 Series only				
Without C6P H.D. Chassis				YYN
With C6P H.D. Chassis. (Standard)				YYN
Spare. C-K2-3 Series only				ZYN
TUBE-TYPE				
7.50-16/C Highway Nylon Blackwall (Maximum Capacity each. Front 2060-lbs) (Dual Rear 1815-lbs). Available only when R05 Dual Rear Wheels are specified.				
Front. C3 Series				XPB
Rear. C3 Regular Cab only				YPB
Spare. C3 Regular Cab only				ZPB
7.50-16/C On-Off Road Nylon Ply Blackwall (Maximum Capacity each. Dual Rear 1815-lbs). Available only when R05 Dual Rear Wheels are specified. C3 Regular Cab only				
Rear				YPC
Spare				ZPC
7.50-16/D Highway Nylon Ply Blackwall (Maximum Capacity each. Front 2440-lbs) (Dual Rear 2140-lbs). Available only when R05 Dual Rear Wheels are specified.				
Front				XPF
Rear				YPF
Spare				ZPF
7.50-16/D On-Off Road Nylon Ply Blackwall (Maximum Capacity each. Front 2440-lbs) (Dual Rear 2140-lbs). Available only when R05 Dual Rear Wheels are specified.				
Front. K3 Series only				XPG
Rear. C-K Series only				YPG
Spare				ZPG

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(s)	List Price	Mfr's Suggested Retail Price ◊
OTHER OPTIONS				
Air Cleaner, Pre-Cleaner: Not available when L25 4.8 Liter Engine is specified	K46			
Air Conditioning: <i>All-Weather.</i> With LB 1 4.3 Liter Engine available only when KC4 Engine Oil Cooler is specified. Not available when V10 Cold-Climate Package is specified. Includes extra cooling.				
Without B3J Diesel Equipment Includes K81 66-Amp Generator	C60			
With B3J Diesel Equipment	C60			
Appearance, Deluxe Front: Includes dark argent grille with bright trim and dual rectangular headlamps. Included when YE9 is specified	V22			
Batteries: 12-Volt. 515 Cold Cranking Amps Delco Freedom. Not available when B3J Diesel Equipment is specified.				
Auxiliary. Not available on C-K1 Series	TP2			
Heavy-Duty. Included when V10 Cold-Climate Package is specified	UA1			
Brakes:				
Power. C1 Series only. Not available when B3J Diesel Equipment is specified	J50			
Heavy-Duty Power. Standard on K1 Series, C2 Bonus and Crew Cab and C-K3 Series. Included when C6P H.D. Chassis is specified.				
Without B3J Diesel Equipment				
C1 Series only	J55			
C2 Regular Cab only. Available only when G50 H.D. or G51 Extra Capacity Rear Springs are specified	J55			
K2 Regular Cab only	J55			
With B3J Diesel Equipment				
C1 Series	J55			
C2 Regular Cab only. Available only when G50 H.D. or G51 Extra Capacity Rear Springs are specified	J55			
K2 Regular Cab	J55			
Bumper Equipment:				
Bumpers, Chromed.				
Rear	VF1			
Rear Step, Fleetside/Wideside only	V42			
Bumpers, Painted. Rear Step	V43			
Guards, Front Bumper. Chromed	V31			
Camper Special Chassis Equipment: <i>Basic Camper Group.</i> C-K2-3 Series only. Available only when V8 engine is specified. Includes camper body wiring harness				
C2 Series only. Also includes F58 H.D. Front Stabilizer.				
Regular Cab only. Available only when C6P H.D. Chassis is specified	Z81			
Bonus Cab or Crew Cab only	Z81			
K2 Series only. Available only when C6P H.D. Chassis is specified. Also includes F80 H.D. Front Springs	Z81			
C3 Series only. Also includes F58 H.D. Front Stabilizer.				
Without R05 Dual Rear Wheels	Z81			
With R05 Dual Rear Wheels. 10,000-lb GVW. Includes G60 Main and Auxiliary Rear Springs and rear stabilizer	Z81			
K3 Series only. Available only when R05 Dual Rear Wheels are specified	Z81			
Carriers, Spare Wheel and Tire: Available only when spare tire is specified.				
Glide-Out	P11			
Side Mounted. Fleetside/Wideside only	P13			
Clock: <i>Quartz Electric.</i>				
Without YE9. Includes Z53 Voltmeter, Temperature and Oil Pressure Gages	U35			
With YE9	U35			
Cold-Climate Package: Not available when C60 Air Conditioning or B3J Diesel Equipment is specified. Includes special insulation, K81 66-Amp Generator, special heater and defroster, K05 Engine Block Heater, anti-freeze protection to -32 degrees and UA1 H.D. Battery.				
Without R05 Dual Rear Wheels				
Without Z62 or YE9	V10			
With YE9 or Z62	V10			

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price ◇
OTHER OPTIONS				
Cold-Climate Package: (Continued)				
C3 Series with R05 Dual Rear Wheels.				
Without Z62 or YE9	V10			
With Z62 or YE9	V10			
Commercial Chassis Equipment, Special: C3 Fleetside/Wideside only. Available only when R05 Dual Rear Wheels are specified. Not available when L25 4.8 Liter Engine or Z81 Camper Special is specified. Includes F58 H.D. Front Stabilizer, rear stabilizer and G60 Main and Auxiliary Rear Springs				
	Z76			
Cooling Systems:				
Engine Oil. Not available when L25 4.8 Liter Engine or B3J Diesel Equipment is specified.	KC4			
Radiator, Heavy-Duty. Not available when C60 Air Conditioning or B3J Diesel Equipment is specified.				
C-K1 Series only	V01			
C-K2-3 Series only. Not available when MX0 or MX1 Automatic Transmission is specified	V01			
Radiator and Transmission Oil, Heavy-Duty. Not available when LB1 4.3 Liter, L25 4.8 Liter Engine or V01 H.D. Raditor is specified. Available only when MX1 or MX0 Automatic Transmission is specified.	V02			
Decor Package, Value: Not available on Bonus Cab, Crew Cab or Stepside/Fenderside Models. Not available when YES, R05 Dual Rear Wheels, V22 Deluxe Front Appearance, whitewall tires, PA6 or N90 Wheels, B84 or B85 Body Side Moldings. Available only when ZY1 Solid Paint and blackwall or white lettered tires are specified. Includes blacked painted radiator grille and headlamp bezels and special body stripe located between body feature lines on the front fenders, pickup box and will extend across the tailgate				
C-K1 series. Also includes N67 Rally Wheels	YJ6			
C-K2-3 Series.	YJ6			
Door Lock System, Power: Included when ZQ2 Operating Convenience Package is specified				
Regular Cab only	AU3			
Bonus and Crew Cab only	AU3			
Floor Covering: Mats, Color-Keyed Front Floor, Removable. Available only when YE9 is specified				
	B32			
Gages: Voltmeter, Temperature and Oil Pressure. Included when YE9 or U35 Electric Clock is specified				
	Z53			
Generator: 66-Amp Delcotron. Standard on K3 Series. Included when B3J Diesel Equipment, C60 Air Conditioning, V10 Cold-Climate Package or R05 Dual Rear Wheels are specified				
	K81			
Glass: Tinted All Windows.				
Regular Cab only	A01			
Bonus Cab or Crew Cab only	A01			
Headlamps: Halogen Hi-Beam. Available only when V22 Deluxe Front Appearance Package or YE9 is specified				
	TT5			
Heaters:				
Engine Block. 600 Watts, 120 Volts. Not available when B3J Diesel Equipment or LF3 5.0 Liter Engine is specified. Included when V10 Cold-Climate Package is specified	K05			
Heavy Duty, Front. Available only when B3J Diesel Equipment is specified. Not available when C60 Air Conditioning is specified	C42			
Lamps:				
Cargo.				
Without Z62 or YE9. Includes C91 Dome Lamp	UF2			
With Z62 or YE9	UF2			
Dome. Included when Z62, YE9 or UF2 Cargo Lamp is specified. Includes door actuated switches and bright lamp bezels	C91			
Roof Marker. Five. C-K2 Series only. Standard on K3 Series. Without R05 Dual Rear Wheels, available only when NA5 Standard or NA6 High Altitude Emission Equipment is specified. Included when R05 Dual Rear Wheels are specified ..	U01			

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(s)	List Price	Mfr's Suggested Retail Price ◊
OTHER OPTIONS				
Lighter, Cigarette: Included when Z62 or YE9 is specified	U37			
Mirrors, Exterior: LH and RH.				
Below-Eye-Line Type. 9" x 6.5".				
Painted	D44			
Stainless Steel	D45			
Camper Type. Stainless steel. 7.5" x 10.5". Adjustable arm feature to provide field of vision for vehicles to 96" wide. Shipped loose for dealer installation	DF2			
Senior West Coast Type Painted. C-K3 Series only. Shipped loose for dealer installation	DG5			
Moldings: Fleetside/Wideside only.				
Body Side Black. Bright with black insert. Not available when YE9, R05 Dual Rear Wheels, B85 Bright Body Side Moldings or YG3 Deluxe Molding Package is specified. Included when YG1 Custom Molding Package, Z62, ZY3 Special Two-Tone Paint, ZY4 Deluxe Two-Tone Paint or ZY5 Exterior Decor Package is specified. Includes lower side and rear moldings of black plastic with bright trim	B84			
Body Side Bright. Not available when B84 Black Body Side Moldings, YG1 Custom Molding Package, R05 Dual Rear Wheels, ZY3 Special Two-Tone Paint, ZY4 Deluxe Two-Tone Paint or ZY5 Exterior Decor Package is specified. Included when YG3 Deluxe Molding Package or YE9 is specified. Includes bright plastic body side rear lower moldings with black paint trim plus bright trim for front side marker lamps and taillights.				
Without Z62	B85			
With Z62	B85			
Custom Package. Fleetside/Wideside only. Not available when YG3 Deluxe Molding Package, YE9 or R05 Dual Rear Wheels are specified. Included when ZY3 Special Two-Tone Paint, ZY4 Deluxe Two-Tone Paint or ZY5 Exterior Decor Package is specified. Includes wheel opening molding, B84 Black Body Side Moldings, B96 Wheel Opening Moldings, bright trim for front side marker lamps and taillights.				
Without Z62	YG1			
With Z62	YG1			
Deluxe Package. Fleetside/Wideside only. Not available when YG1 Custom Molding Package or R05 Dual Rear Wheels are specified. Included when YE9 is specified. Includes bright trim for front side marker lamps and taillights, B85 Bright Body Side Moldings and B96 Wheel Opening Moldings.				
Without Z62, ZY3 Special Two-Tone Paint, ZY4 Deluxe Two-Tone Paint or ZY5 Exterior Decor Package	YG3			
With Z62	YG3			
With ZY3 Special Two-Tone Paint, ZY4 Deluxe Two-Tone Paint or ZY5 Exterior Decor Package	YG3			
Wheel Opening. Available only when ZY6 Custom Two-Tone Paint is specified. Included with YG1 Custom or YG3 Deluxe Moldings, YE9, ZY3 Special or ZY4 Deluxe or ZY5 Custom Two-Tone Paint	B96			
Guards, Door Edge.				
Regular Cab only	B93			
Bonus Cab or Crew Cab only	B93			
Operating Convenience Package: Includes AU3 Power Door Locks and A31 Power Windows				
Regular Cab only	ZQ2			
Bonus and Crew Cab only	ZQ2			
Preliminary Price Information	B3W			
Radio Equipment:				
AM Radio	U63			
AM/FM Radio	U69			
AM/FM Stereo Radio	U58			
AM/FM Stereo Radio with Stereo Cassette Tape	UN3			
Windshield Antenna. Included with radio	U76			
Rails, Pickup Box Side	D73			
Shield, Transfer Case: K1-2-3 Series only.	NY7			
Shock Absorbers: Heavy-Duty, Front and Rear. Standard on C2 Bonus and Crew Cab and C-K3 Series. Included on C2 Series when C6P H.D. Chassis is specified. Not available K1-2 Series.	F51			

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(a)	List Price	GM's Suggested Retail Price◇
OTHER OPTIONS				
Shocks, Front Quad: K1-2 Regular Cab only. Includes dual left and right hand shock absorbers on front, heavy duty shock absorbers on rear and a front axle nose bumper to limit axle windup				
K1 Series only.	Z75			
K2 Series only.				
Without C6P H.D. Chassis	Z76			
With C6P H.D. Chassis	Z75			
Speed Control, Electronic: C1 Series without B3J Diesel Equipment is available only when J50 or J55 H.D. Power Brakes and MM3 3-Speed, MM4 4-Speed or MX0 Automatic Transmission are specified. C-K2-3 Series not available with MM4 or MM7 4-Speed Transmission or B3J Diesel Equipment ..	K34			
Spring:				
<i>Front, Heavy-Duty</i> Not available on C2 Bonus and Crew Cab and C-K3 Series.				
Capacity 1625-lb each. C1 Series not available when J55 HD Power Brakes or B3J Diesel Equipment is not specified.	F60			
Capacity 1700-lb each. C1 Series only. Included when B3J Diesel Equipment is specified. Available only when J55 H.D. Power Brakes are specified ..	F60			
Capacity 1900-lb each. C2 Series only. Included when C6P H.D. Chassis or B3J Diesel Equipment is specified	F60			
Capacity 2250-lb each.				
K1 Series only. Includes H.D. front and rear shock absorbers. Recommended for snowplow type usage only.	F60			
Without Z75 Front Quad Shocks	F60			
With Z75 Front Quad Shocks				
K2 Series only. Included when Z81 Camper Special Chassis Equipment is specified. Includes H.D. front and rear shock absorbers when C6P H.D. Chassis is not specified.	F60			
Without Z75 Front Quad Shocks or C6P H.D. Chassis	F60			
With Z75 Front Quad Shocks or C6P H.D. Chassis				
<i>Rear, Heavy-Duty.</i> Not available on C6P H.D. Chassis, C2 Bonus and Crew Cab, C3 and K1-2-3 Series.				
Capacity 1750-lb each. C1 Series only.	G50			
Capacity 2600-lb each, two-stage. C2 Regular Cab only. Not available when C6P H.D. Chassis or Z81 Camper Special Chassis Equipment is specified	G50			
<i>Rear, Extra Capacity.</i>				
Capacity 2000-lb each. C1 Series only	G51			
Capacity 3000-lb each. C2 Series only. Standard on C2 Bonus and Crew Cab and C-K3 Series only. Not available on K2 Series. Included when C6P H.D. Chassis is specified	G51			
<i>Rear, Main and Auxiliary.</i> Capacity 3750-lb each. C-K3 Series only. Included when Z81 Camper Special Chassis Equipment is specified with R05 Dual Rear Wheels or Z76 Commercial Chassis Equipment on C3 Series. Also included when R05 Dual Rear Wheels are specified on K3 Series.	G60			
Stabilizer Bar:				
<i>Front.</i> 1" diameter. Standard on C2 Bonus or Crew Cab. Included when C6P H.D. Chassis is specified on C2 Series. Not available on K1-2-3 Series or when Z76 Commercial Chassis Equipment or Z81 Camper Special Chassis Equipment is specified	F59			
<i>Front, Heavy-Duty.</i> 1.25" diameter. C2-3 Series only. Standard on K1-2-3 Series. Included when Z76 Commercial Chassis Equipment or Z81 Camper Special Chassis Equipment is specified				
Without C6P H.D. Chassis	F58			
With C6P H.D. Chassis and C2 Bonus or Crew Cab	F58			
Steering:				
<i>Power.</i> Standard on K1-2-3 Series. Included when B3J Diesel Equipment is specified	N41			
<i>Power, Not Desired.</i> C1-2-3 Series only. Not available when B3J Diesel Equipment is specified	N51			
Steering Wheel: Comfortilt. Not available when MM3 3-Speed Manual Transmission is specified.	N33			

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(s)	List Price	Mfr's Suggested Retail Price ◊
OTHER OPTIONS				
Tank, Fuel: Auxiliary. RH Frame Mounted.				
C-K1,2 Series only				
Without B3J Diesel Equipment. Provides two fuel tanks of approximately 16-gallon per tank.	NL2			
With B3J Diesel Equipment.				
C-K10703. Provides two fuel tanks of approximately 16-gallon per tank.	NL2			
C-K10903. Provides two fuel tanks of approximately 20-gallon per tank.	NL2			
C-K2,3 Series only. Provides two fuel tanks of approximately 20-gallon per tank.				
Without B3J Diesel Equipment	NL2			
With B3J Diesel Equipment	NL2			
Towing Device: Two front towing hooks	V76			
Wheel Trim: Bright Metal.				
Wheel Covers.				
C-K1 Series only	P01			
C3 Series only. Available only when R05 Dual Rear Wheels and 7.50-16 Tires are specified.	P01			
Wheel Covers, Special. C-K2 and C3 Series only. Not available when R05 Dual Rear Wheels are specified	PA1			
Wheels: C-K1 Series only.				
Rally Includes special hub caps and trim rings. Included when YJ6 Value Decor Package is specified.				
Without P225 or P235 Tires. Wheel size is 15" x 7"	N67			
With P225 or P235 Tires. Wheel size is 15" x 8"	N67			
Styled. Includes special hub caps. Four wheels only.				
Without P225 or P235 Tires. Wheel size is 15" x 7"	PA6			
With P225 or P235 Tires. Wheel size is 15" x 8"	PA6			
Aluminum, Cast. Four Wheels only. Includes 15" x 7" wheels and special hub caps.	N90			
Wheels, Dual Rear: C-K3 Fleetside/Wideside only. Not available when L25 4.8 Liter Engine is specified. Includes K81 66-Amp Generator, plastic rear fender extensions with side marker lamps located on front and rear sides and dual rear chassis provisions and U01 Roof Marker Lamps.				
C3 Series only. Available only when Z76 Special Commercial Chassis Equipment or Z81 Camper Special Chassis Equipment is specified. MX1 Automatic Transmission available only when V02 H.D. Radiator and Transmission Oil Cooler is specified.				
Without C60 Air Conditioning or B3J Diesel Equipment.				
Regular Cab only	R05			
Bonus Cab or Crew Cab only	R05			
With C60 Air Conditioning or B3J Diesel Equipment.				
Regular Cab only	R05			
Bonus Cab or Crew Cab only	R05			
K3 Series only. MX1 Automatic Transmission available only when V02 H.D. Radiator and Transmission Oil Cooler is specified. Includes G60 Main and Auxiliary Springs				
Without C60 Air Conditioning or B3J Diesel Equipment	R05			
With C60 Air Conditioning or B3J Diesel Equipment	R05			
Wheels, Single Rear: C-K3 Fleetside/Wideside only. Not available when R05 Dual Rear Wheels are specified	R04			
Windows:				
Power. Included when ZQ2 Operating Convenience Package is specified				
Regular Cab only	A31			
Bonus and Crew Cab only	A31			
Sliding Rear. (Note: If A01 Tinted Glass is specified, sliding window will remain clear.)	A28			
Windshield Wiper System: Intermittent Not available when MM3 3-Speed Manual Transmission is specified.	CD4			

NOTES

C/K PICKUP

CAB & BODY FEATURES

CAB CONSTRUCTION

CAB DIMENSIONS


COLOR & TRIM CHARTS

TWO-TONES

C/K PICKUP


CUSTOM DELUXE/SIERRA FEATURES—STANDARD MODEL

The Custom Deluxe/Sierra standard models include the following items as standard equipment

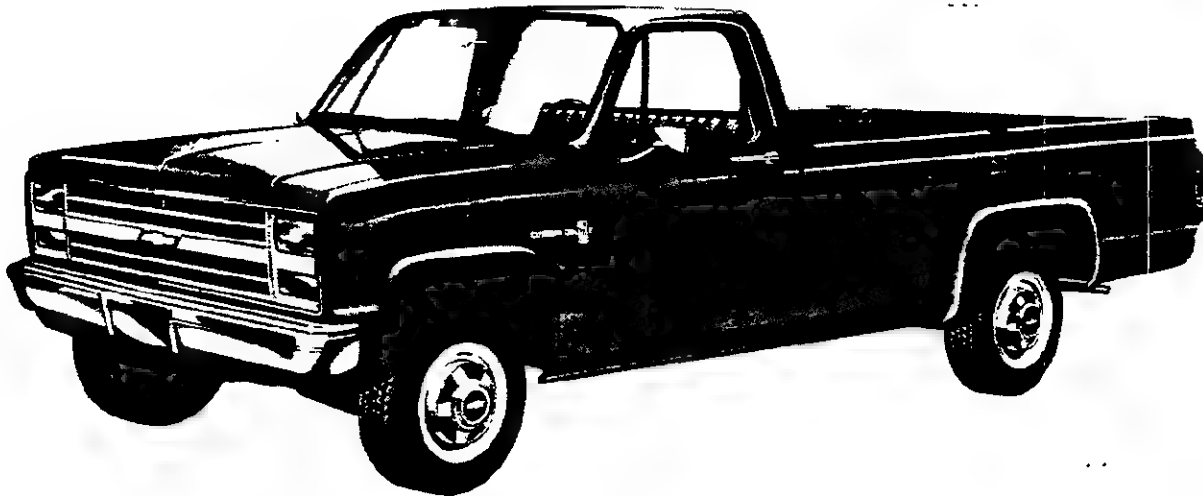

EXTERIOR


- **Bumper:** Front; chromed
- **Color:** See Interior and Exterior Color Selection Chart
- **Grille and Headlamp Bezels:** Molded plastic; painted light argent (GMC grille has dark argent air intake areas); integral Chevrolet emblem/GMC letters at center of grille
- **Horn:** Single, electric, low-note
- **Hub Caps:** Bright metal with black trim (single rear wheel models only)
- **Keys:** Two-key system; with separate keys for ignition switch and door locks
- **Lettering, "Chevrolet/GMC":** Tailgate: White decal except black with Frost White body color
- **Lights:**
 - Backup lamps: Two rear (integral with taillamps)
 - Clearance and identification lamps (K3 Series models only): Five front (on roof); Five rear (on tailgate)
 - Combination parking/direction/hazard: Two front
 - Combination tail/stop/direction/hazard: Two rear
 - Headlamps: Two, rectangular
 - License plate lamp: Single rear
- Side marker lamps with reflectors, two front; two rear (integral with taillamps)
- **Mirrors:** RH and LH fixed arm with adjustable 5-7/16" wide x 4" high heads; chrome finish
- **Moldings:** Bright, drip molding over side doors; headlamp and grille outline moldings
- **Nameplates:** Bright "Custom Deluxe/Sierra" nameplates with series designation on front fenders near doors; bright "3 + 3" nameplates on Crew Cab models or "BONUS CAB" nameplates on Bonus Cab models on cab rear quarters at styling crease line
- **Pickup Box:** Steel floor on Fleetside/Wideside models and wood floor with steel skid strips on Stepside/Fenderside models; painted body color
- **Spare Tire Carrier:** Under frame in back (C-K1 Series models only)
- **Tools:** Mechanical jack and wheel wrench
- **Wheels:** Painted white
- **Windshield Wipers and Washers:** Electric, 2-speed wipers with bright finish on exposed metal portions; wet-arm design demand-type washer system

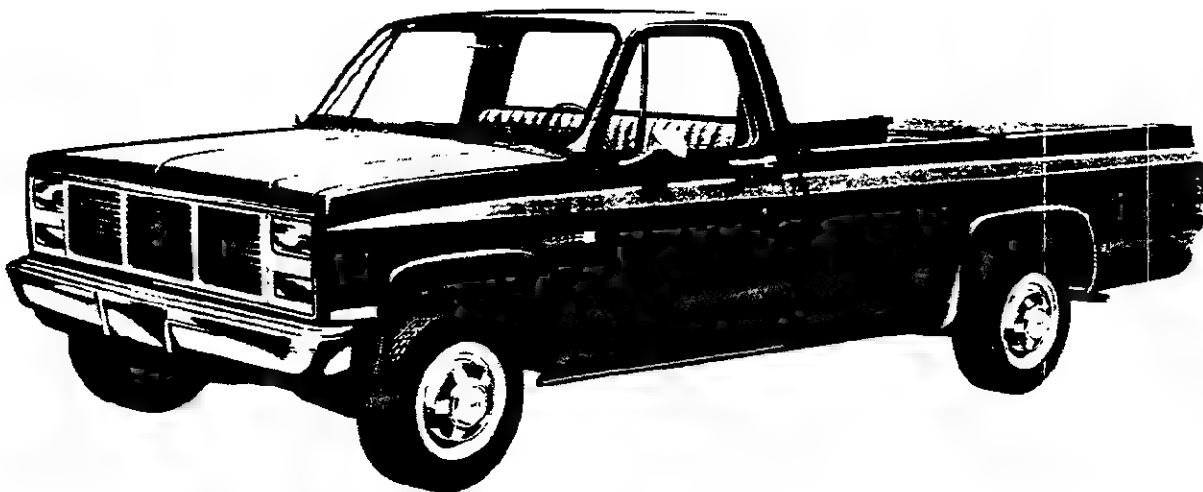

C/K PICKUP

CUSTOM DELUXE/SIERRA FEATURES—STANDARD MODEL

The Custom Deluxe/Sierra standard models include the following items as standard equipment

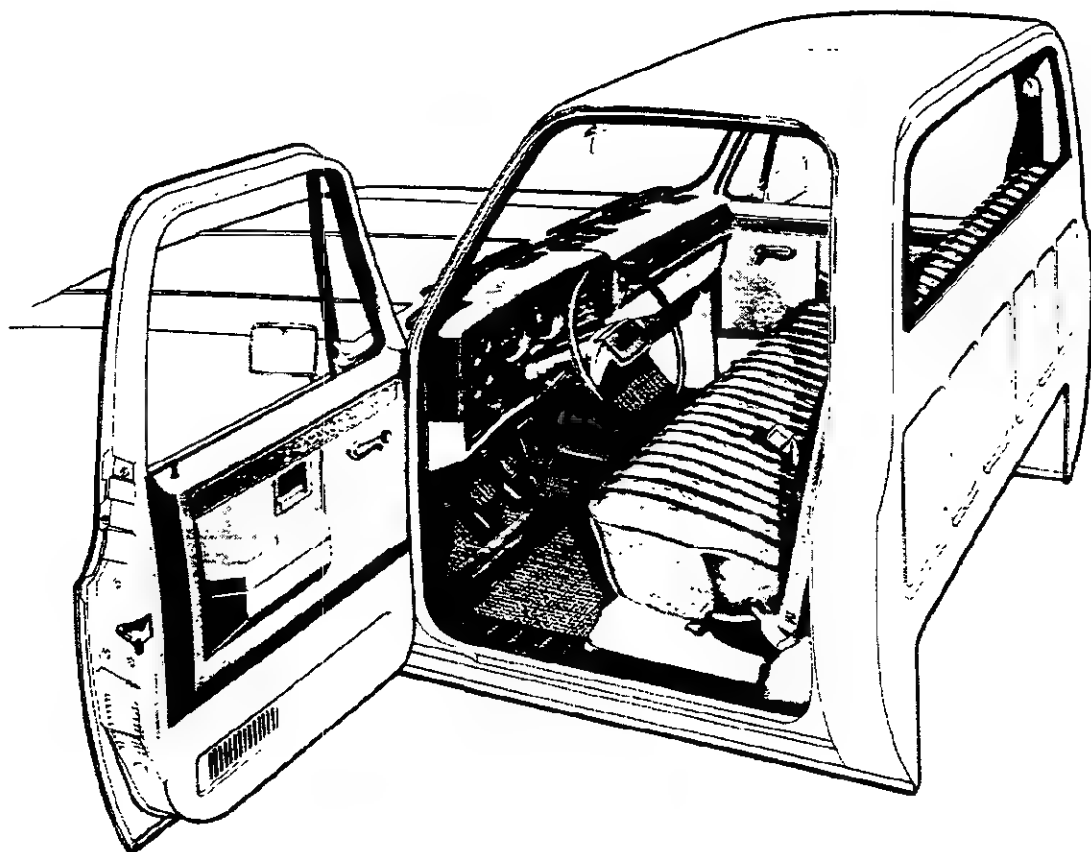

INTERIOR

- **Armrests:** RH and LH padded; integral with door trim panels
- **Ashtrays:** In middle of instrument panel (all models) and in rear door trim panels (Crew Cabs and Bonus Cabs)
- **Coat Hooks:** RH (all models) and over rear doors (Crew Cabs and Bonus Cabs)
- **Colors:**
Painted areas: Same as exterior primary color choice
Interior trim: Coordinated with seat trim color choice
- **Door Sill Plates:** Door-opening protection and floor mat retention; full-length; black plastic for Regular Cab front doors and bright metal for Bonus Cab and Crew Cab front and rear doors
- **Door Trim Panels:** Color-keyed, embossed molded plastic with integral armrests
- **Floor Covering:** Embossed black rubber mats
- **Heater and Defogger:** Deluxe-air
- **Hood Lock Release:** Handle located on LH side under instrument panel
- **Instrument Cluster Bezel:** Black crackle finish with bright trim
- **Instruments:**
Gages: Speedometer, odometer and fuel
Switches: Main, for control of exterior lights, instrument cluster lights, and cab interior lights; multi-function switch on steering column for direction signals by moving lever up or down (includes lane change position), headlamp beams by pulling lever toward driver, windshield wiper by turning band marked "WIPER" toward or away from driver, and windshield washer by pushing in the lever knob; ignition with key-in warning buzzer; hazard warning; heater fan
Warning lights: Generator, oil pressure, engine temperature, seat belt, service-parking brake, direction/hazard signal, and high beam
- **Instrument Panel Control Knobs:** Soft black plastic (except heater and wiper-washer controls) with white graphic identification
- **Instrument Panel Pad:** Color-keyed, energy-absorbing foam type with grained vinyl skin; has black crackle-finished applique on RH side with bright, black, and silver trim and bright "Custom Deluxe/Sierra" nameplate
- **Insulation and Sound Deadening Material:** Dash (firewall), under front seat at center, under front floor mat, under rear floor mat and under rear seat at center on Crew Cabs, under rear floor mat on Bonus Cabs (center portion only in rearmost area) and between double-walled roof panel of regular cabs. NOTE: Extra-thick insulation used for front portion of Crew Cab and Bonus Cab rear compartment
- **Lights:** Instrument cluster and cab interior lights
- **Mirror, Rearview:** 10" prismatic with soft vinyl rim
- **Seats:** Full-width, full depth foam bench-type with embossed grained all-vinyl trim; front (all models) and rear (Crew Cabs); includes folding backrest for regular cab seat and Crew Cab rear seat. Also available at extra cost: (1) dual-tone woven cloth/vinyl trim; or (2) all-vinyl pigskin grained trim. See Interior and Exterior Color Selection Chart for color and trim availability
- **Seat Belts:** Front (all models): non-detachable combination lap and shoulder belts for outboard positions with emergency-locking retractors and switch in driver's lap belt retractor for buzzer warning system; lap belt with manual adjustment for center position. Rear (Crew Cabs only): lap belts with emergency-locking retractors for outboard positions; lap belt with manual adjustment for center position. All seat belts are color-keyed with pushbutton type buckles
- **Steering Wheel and Column:** 16" black, soft plastic wheel with 2 spokes; black energy-absorbing steering column with anti-theft locking feature
- **Storage Box:** In RH side of instrument panel; door has bright turn-type latch release
- **Sunshades:** RH and LH padded; color-keyed

C/K PICKUP

SCOTTSDALE/HIGH SIERRA MODEL OPTION—RPO Z62 (FOR ALL MODELS)


This option includes all Custom Deluxe/Sierra standard model items plus the additions or substitutions listed below



Chevrolet model shown (GMC model available)

EXTERIOR

- **Bright Appearance Items:**
 - "Scottsdale/High Sierra" nameplates with series designation on front fenders
 - Body side and rear molding trim (Fleetside/Wideside models with single rear wheels only)
 - Chevrolet emblem/GMC letters at grille center
 - Front fender side marker lamp trim
 - Rear fender clearance lamp trim (Fleetside/Wideside models with dual rear wheels only)
- **Taillamp trim** (Fleetside/Wideside only)
- **Windshield and rear window reveal moldings**
- **Horn:** Additional, electric high-note
- **Moldings:** Black plastic body side and rear moldings with bright trim (Fleetside/Wideside models with single rear wheels only)

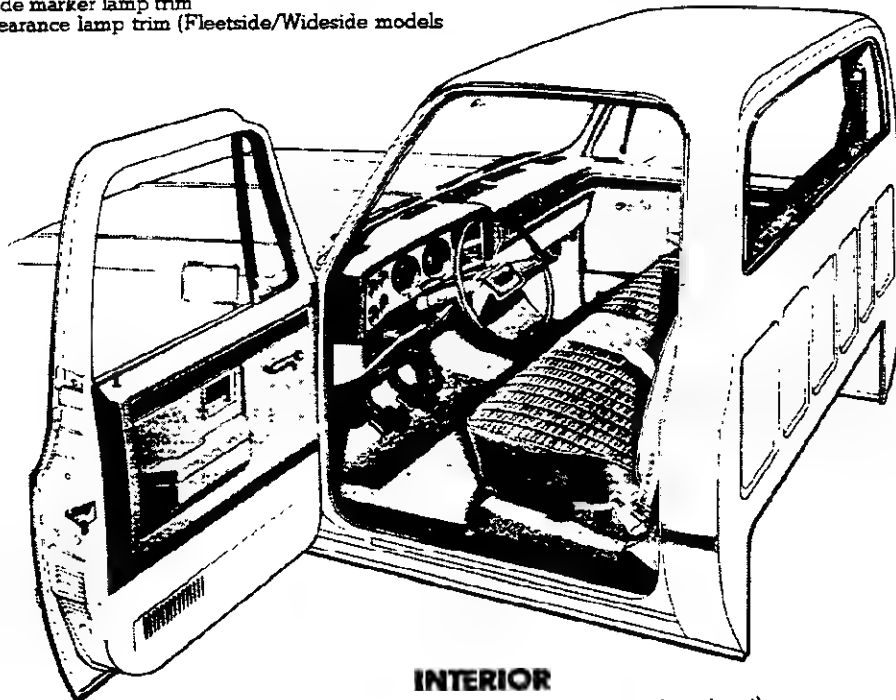

INTERIOR

- **Bright Appearance Items:**
 - "Scottsdale/High Sierra" nameplate on instrument panel pad
 - Dome lamp trim
 - Trim on instrument cluster bezel, instrument panel pad applique
 - Trim on door trim panels (regular cabs only)
- **Cigar Lighter:** With fiber optic illuminated ashtray
- **Dome Lamp:** With bright trim
- **Dome and Interior Lamp Switches:** Front door-operated (dome and interior lamps also may be activated by main light switch)
- **Door Trim Panels:** Color-keyed embossed molded plastic, with black crackle-finished upper decorative inserts having a silver border (Regular Cabs only)
- **Floor Covering:** Color-keyed rubber mats (except Bonus Cab rear compartment mat)
- **Headliner:** Full-length mystic-colored, perforated molded cloth with fiberglass blanket backing; includes matching retainer moldings (Crew Cabs and Bonus Cabs only)
- **Insulation:** Under cowl panel, on Crew Cab and Bonus Cab headliner, and on cab back panel
- **Pillar Trim Panels:** Mystic molded plastic on windshield pillars and center door pillars (Crew Cabs and Bonus Cabs only)
- **Seats:** See Interior and Exterior Color Selection Chart for color and trim availability
 - Regular Cabs—choice of: 1) dual-tone woven cloth/vinyl trim; or 2) all-vinyl pigskin grained trim
 - Crew Cabs and Bonus Cabs—embossed grained all-vinyl trim standard. Also available at extra cost: 1) all-vinyl pigskin grained trim; or 2) textured velour cloth/vinyl trim

C/K PICKUP

SILVERADO/SIERRA CLASSIC MODEL OPTION—RPO YE9 (FOR REGULAR CAB MODELS)

This option includes all items in the Scottsdale/High Sierra model option plus the additions or substitutions listed below



GMC model shown (Chevrolet model available)

EXTERIOR

• Bright Appearance Items:

- “Silverado/Sierra Classic” nameplates with series designation on front fenders
- Chrome-trimmed grille and headlamp bezels (Chevrolet models only)
- Chevrolet emblem/GMC letters at grille center
- Cab back panel applique molding
- “Chevrolet/GMC letters” nameplate on tailgate applique panel (Fleetside/Wideside only)
- Bright applique panel fitted over central area of tailgate with


- black-trimmed decorative border (Fleetside/Wideside only)
- Body side and rear moldings with black paint trim (Fleetside/Wideside models with single rear wheels only)
- Wheel-opening lip moldings with black paint trim (Fleetside/Wideside models with single rear wheels only)

• Cab-to-Fender Insulators

- **Grille and Headlamp Bezel Paint:** Dark argent (Chevrolet), argent/dark argent (GMC)

• Hood Insulator

- **Special Headlamps:** Rectangular; dual RH and LH

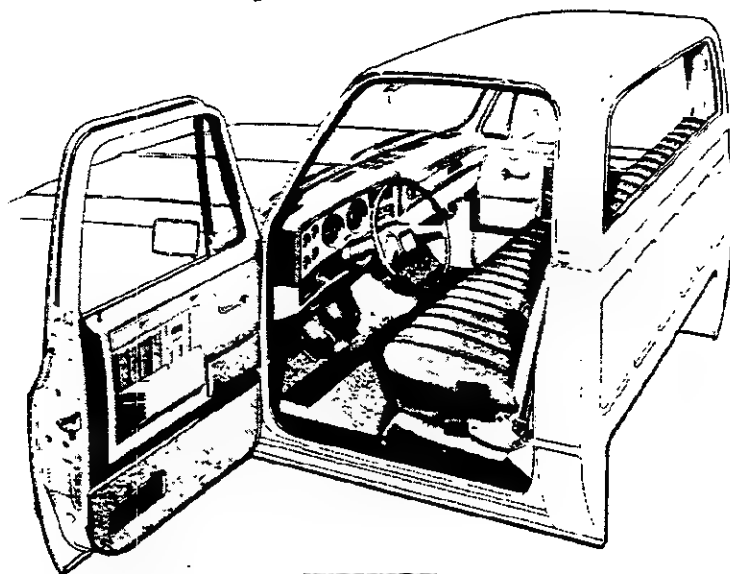

INTERIOR

• Bright Appearance Items:

- “Silverado/Sierra Classic” nameplate on instrument panel pad
- MM4 four-speed transmission shift lever (C1-2-3 models)
- Trim on horn button
- **Cowl Panel Trim:** Color-keyed molded plastic on entire surface of cowl side panels
- **Door Trim Panels:** Special color-keyed molded plastic with pewter-toned brush-finished upper decorative inserts having bright, black, and silver borders; cloth inserts in armrest area; vinyl storage pockets; door closing assist straps; plus carpeting and bright trim strips on lower portions
- **Floor Covering:** Color-keyed carpeting
- **Headliner:** Perforated, color-keyed, molded cloth with fiberglass blanket backing; includes matching retainer moldings

- **Instrument Cluster:** Voltmeter, oil pressure gage, and engine temperature gage replace warning lamps; includes pewter-toned brush-finished bezel
- **Instrument Panel Pad Applique:** Pewter-toned brushed finish with bright, black, and silver trim
- **Insulation:** Headliner insulator, extra-thick insulators for entire floor area
- **Seat:** Choice of: 1) all-vinyl pigskin grained trim; or 2) textured velour cloth/vinyl trim. See Interior and Exterior Color Selection Chart for color and trim availability
- **Steering Wheel:** Bright trim on horn button
- **Trim Panels:** Color-keyed molded plastic on windshield pillars and upper rear quarter panels
- **Visor Mirror:** On RH sun visor

C/K PICKUP

SILVERADO/SIERRA CLASSIC MODEL OPTION—RPO YE9 (FOR CREW CAB AND BONUS CAB MODELS)

This option includes all items in the Scottsdale/High Sierra model option plus the additions or substitutions listed below



Chevrolet model shown (GMC model available)

EXTERIOR

- **Bright Appearance Items:**

- "Silverado/Sierra Classic" nameplates, with series designation, on front fenders
- Cab back panel applique molding
- "Chevrolet/GMC letters" nameplate on tailgate applique panel
- Chrome-trimmed grille (Chevrolet models only)
- Body side and rear moldings with black paint trim (models with single rear wheels only)
- Wheel-opening lip moldings with black paint trim (models with single rear wheels only)


Bright applique panel fitted over central area of tailgate with black-trimmed decorative border

- **Cab-to-Fender Insulators**

- **Grille and Headlamp Bezel Paint:** Dark argent (Chevrolet); argent/dark argent (GMC)

- **Hood Insulator**

- **Special Headlamps:** Rectangular; dual RH and LH

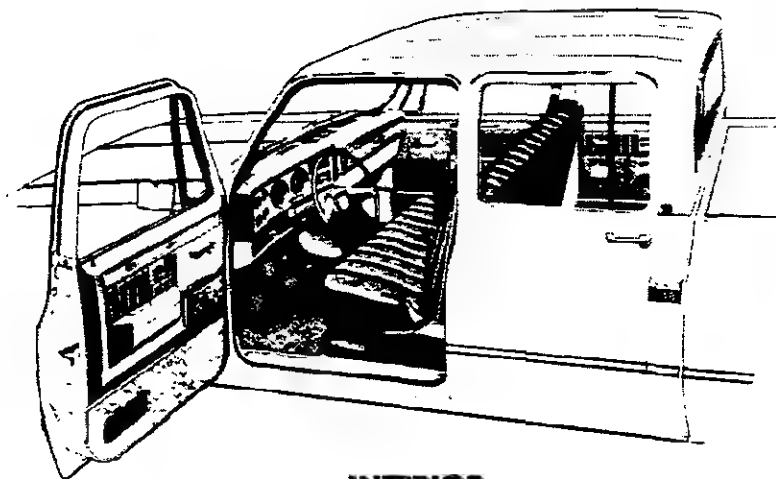

INTERIOR

- **Bright Appearance Items:**

- "Silverado/Sierra Classic" nameplate on instrument panel pad
- MM4 four-speed transmission shift lever (C2-3 models)
- Trim on door trim panels and horn button

- **Cowl Panel Trim:** Color-keyed molded plastic on entire surface of cowl side panels

- **Door Trim Panels:** Special color-keyed molded plastic with pewter-toned brush-finished upper decorative inserts having bright, black, and silver borders; cloth inserts in armrest area, vinyl storage pockets and door closing assist straps (on front units only); plus carpeting and bright trim strips on lower portions

- **Floor Covering:** Color-keyed carpeting. (Except Bonus Cab rear compartment.)

- **Instrument Cluster:** Voltmeter, oil pressure gage, and engine temperature gage replace warning lamps; includes pewter-toned brush-finished bezel

- **Instrument Panel Pad Applique:** Pewter-toned brushed finish with bright, black, and silver trim

- **Insulation:** Extra-thick insulators for entire front and rear compartment floor areas, except under rear portion of Bonus Cab floor mat


- **Seats:** Choice of: 1) all-vinyl pigskin grained trim; or 2) textured velour cloth/vinyl trim. See Interior and Exterior Color Selection Chart for color and trim availability

- **Steering Wheel:** Bright trim on horn button

- **Visor Mirror:** On RH sun visor

C/K PICKUP

PICKUP SEAT

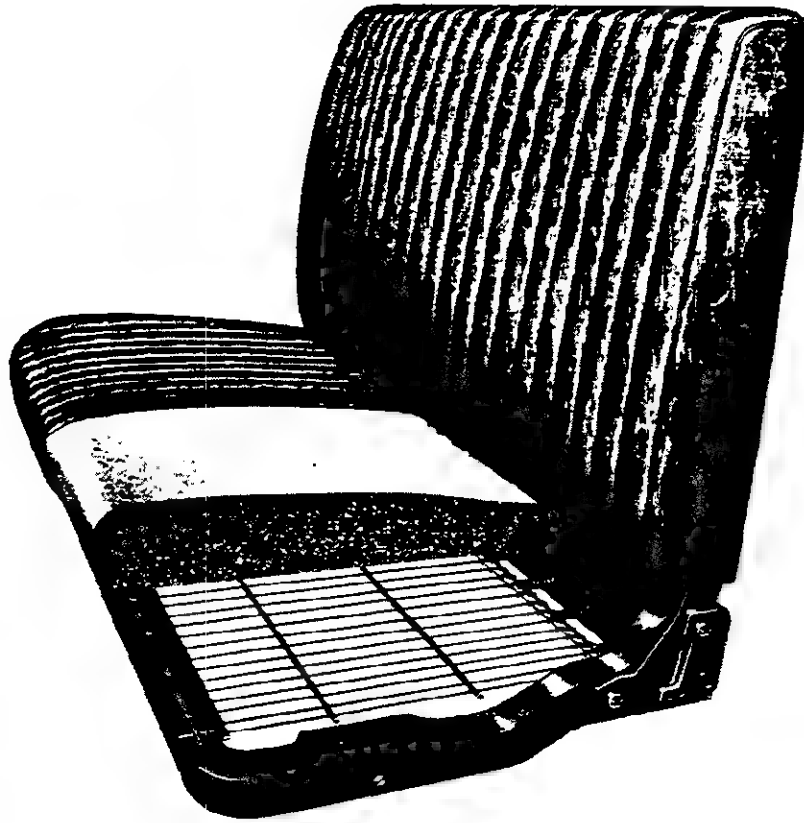


STANDARD FULL-DEPTH FOAM SEAT

Molded polyurethane foam pads over a steel cushion spring and frame assembly and a backrest frame assembly provide resilient support for driver and passengers, with an extra-thick pad employed for the cushion. A folding type backrest with inertia latch is used for the Regular Cab front seat and Crew Cab rear seat, providing convenient access to the stowage area behind the seat. Front seats are adjustable fore and aft. Trim is durable, easy-to-clean vinyl.

C/K PICKUP


CAB CONSTRUCTION

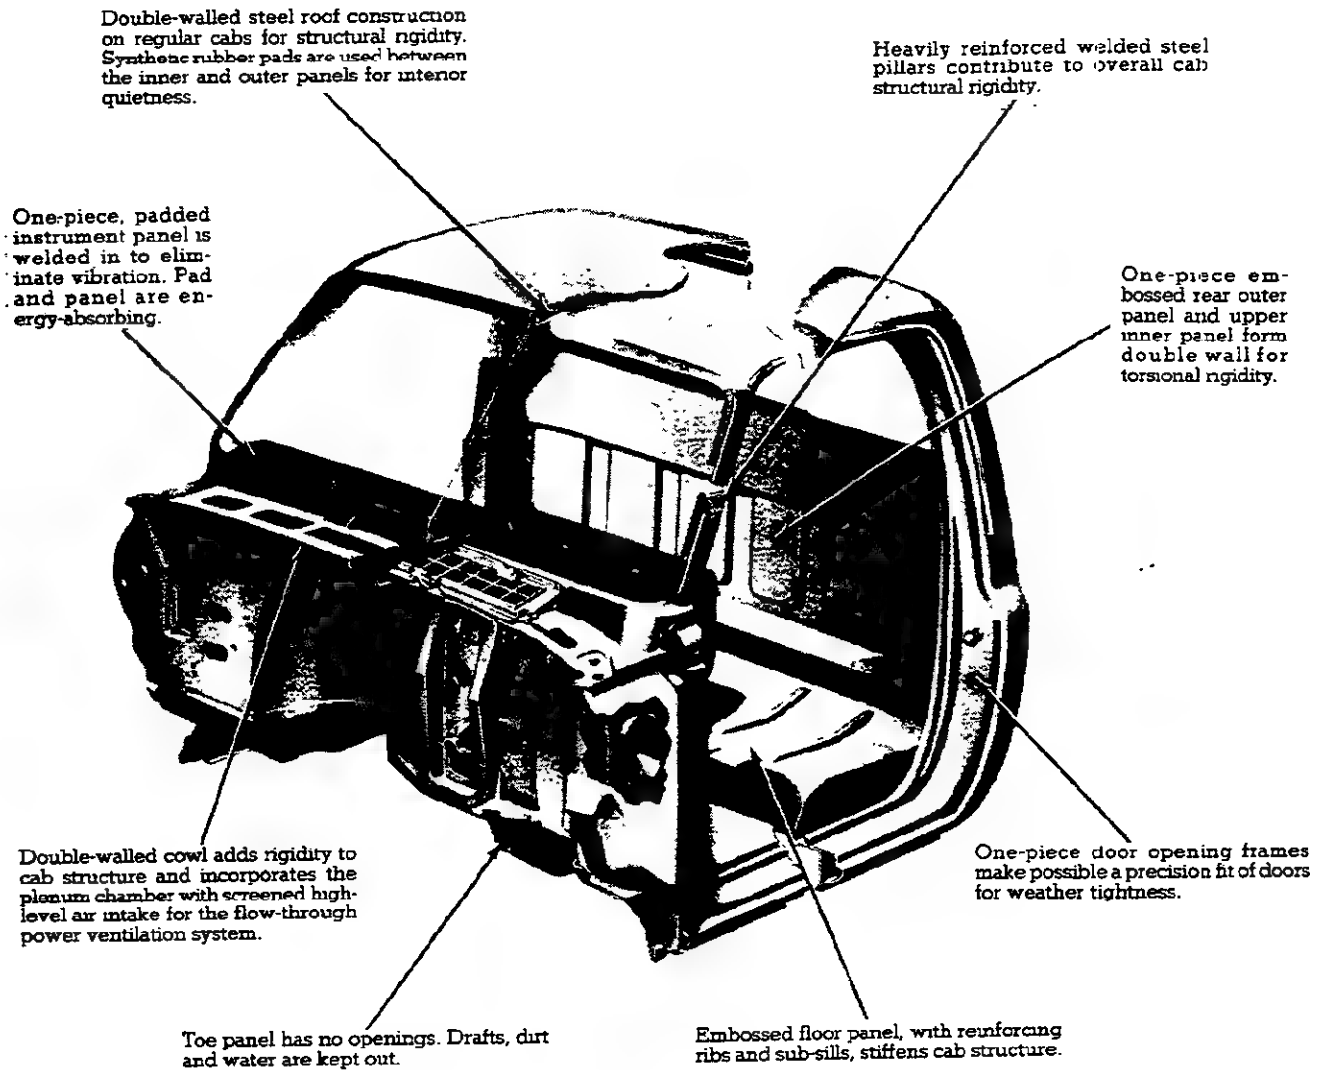

CAB MOUNTINGS


Typical Cab Mount shown.

Both front and rear cab mounts used are the compression-rebound type for quietness and durability.



C/K PICKUP

STANDARD CAB FEATURES

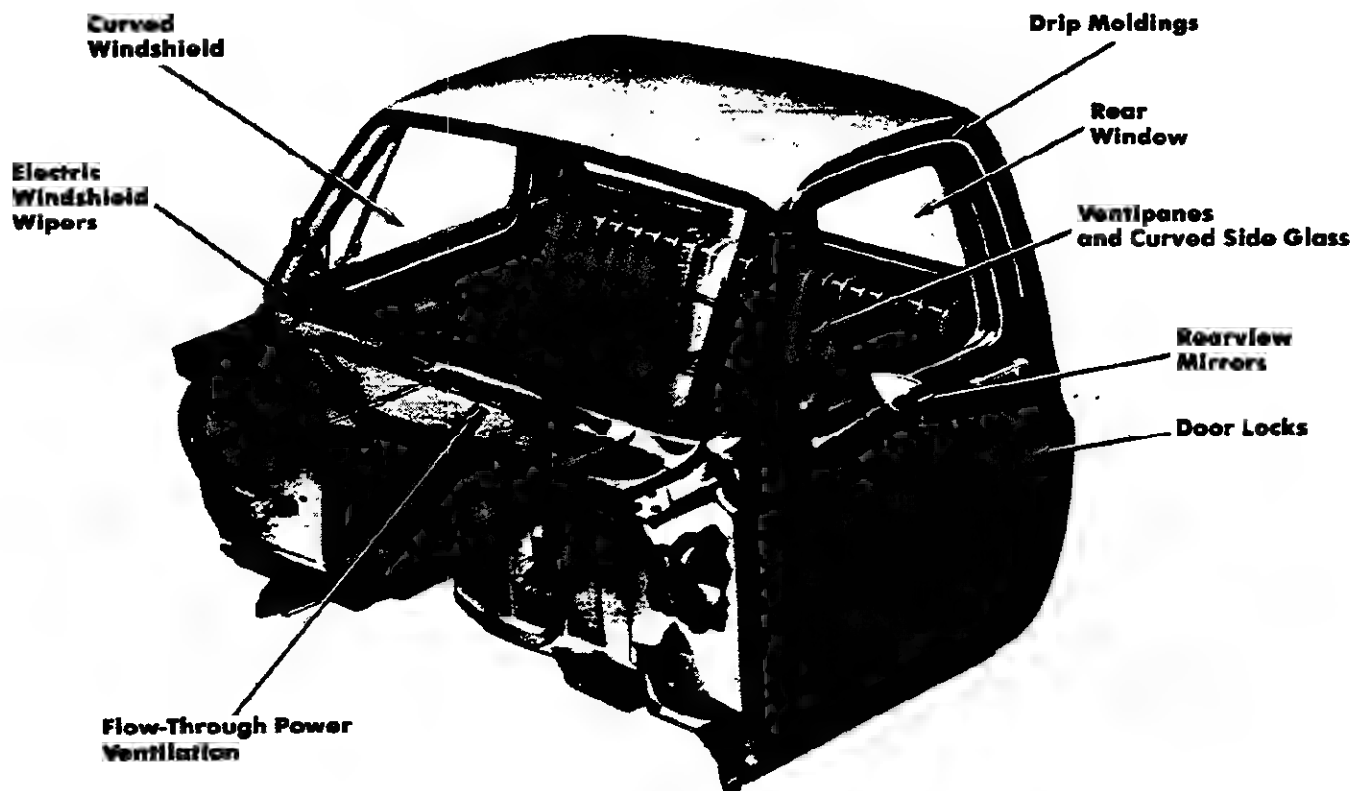

Curved Windshield—The large, one-piece windshield of laminated safety glass has an area of approximately 1447 square inches for excellent visibility.

Rear Window—The rear window is of solid safety glass with a 790 square inch area.

Electric Windshield Wipers—High-capacity, 2-speed motor provides constant wiping action regardless of engine load or accelerator position. Wipers have 16-inch blades. Wiper arms and the metal portions of the blades have a matte finish. Electric washers with a 3-pint capacity reservoir are also standard. Dual on/off washer nozzles assure efficient washing action.

Drip Moldings—Bright metal moldings over side doors.

Flow-Through Power Ventilation—With ignition switch on and heater fan switch on, outside air enters the cab through the louvers in the cowl air intake grille between the hood and the windshield—away from road

dust, heat and fumes. The air passes through screened inlets into a plenum chamber built into the cowl, where water is separated from the air and drained out. Air enters the driver compartment through the heater (or optional air conditioning) system and exits through a pressure relief valve in each door. Additional air may be admitted into the interior through two inlets—one on the right side (except with optional air conditioning) and one on the left side of the lower cowl structure. Inlet valves are operated by levers integral with the inlet assemblies.

Ventipanes and Curved Side Glass—Additional flow of outside air can be controlled by a pivot-type ventipane in each front door. Friction-type latches with push-button locks and smoothly contoured handles assure excellent sealing and security. Ventipanes, as well as curved door windows, are of solid safety glass with an area of 546 square inches for each side. (Crew Cab and Bonus Cab rear side door glass area—488

sq. in. each.)

Rearview Mirrors—Standard chrome exterior mirrors are of the fixed arm type with 5-7/16" wide x 4" high adjustable heads. Both right-hand and left-hand units are provided.




Many optional mirror combinations are also available. See the Optional Equipment listing for each model.

Door Locks—All cab models include left & right hand key-operated (front) door locks as standard equipment. Depression of inside pushbuttons prevents accidental front and rear door opening and provides keyless front door locking when leaving the vehicle. Door lock key is separate from the ignition key for theft protection.

Identification and Clearance Lights—All models with second unit bodies 60" wide or over, or models with dual rear wheels, are equipped with cab identification and clearance lights. See individual model specification pages.



C/K PICKUP

CAB DIMENSIONS*

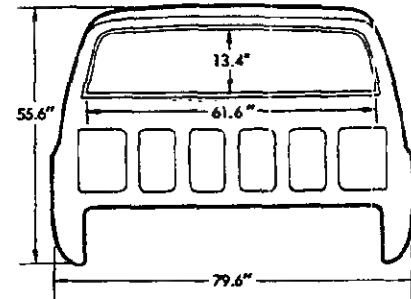


Glass Area (sq. in.)

Windshield.....	1447	Rear side door window	
Front side door window		(each side) on Crew Cab	
(each side) including		including fixed window.	488
ventipanes.....	546	Rear window.....	790

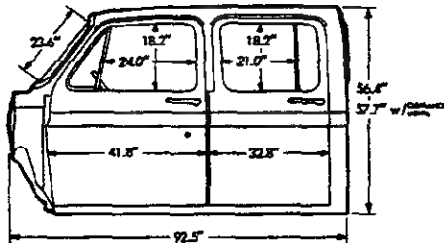

(Crew Cab model)

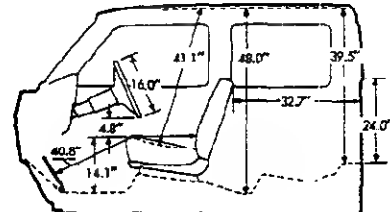


(Bonus Cab model)

*All interior dimensions measured with front seat in rearmost position. Seat travel is 5"


INSTRUMENT CLUSTERS

Standard Cluster with warning lights for engine temperature, generator, and oil pressure. Diesel engine models will also have warning lights for glow plugs, low coolant and water-in-fuel (or fuel filter).

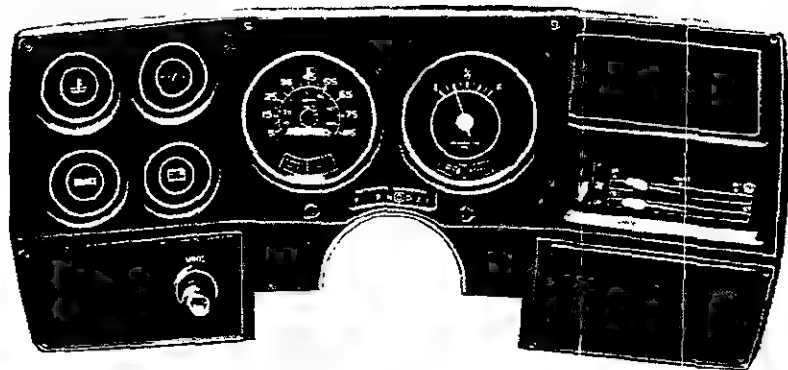

Optional Cluster (RPO Z53) with voltmeter, engine temperature gage, and oil pressure gage. Included in Silverado/Sierra Classic model option (RPO YE9) along with bright brush-finished trim, as illustrated. Cluster faceplate for Custom Deluxe/Sierra (Std.) models has black crackle finish. An electric clock (RPO U35), shown at lower left, is available for use with the optional cluster.

Optional air conditioning outlets and radio also shown in illustration.

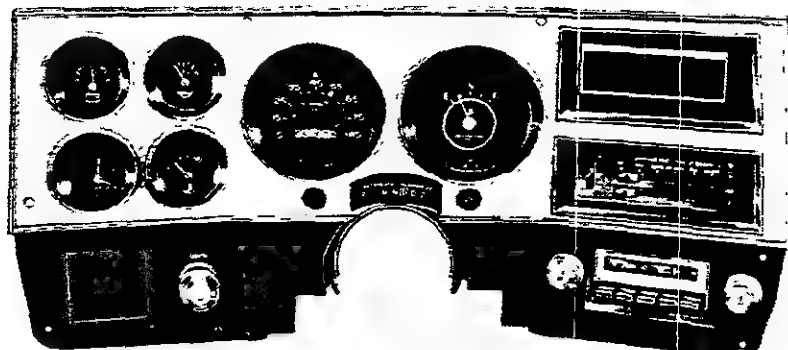


C/K PICKUP FLEETSIDE/WIDESIDE PICKUP BOX


DUAL REAR WHEEL APPLICATION

Body Ordering Code E63

DIMENSIONS

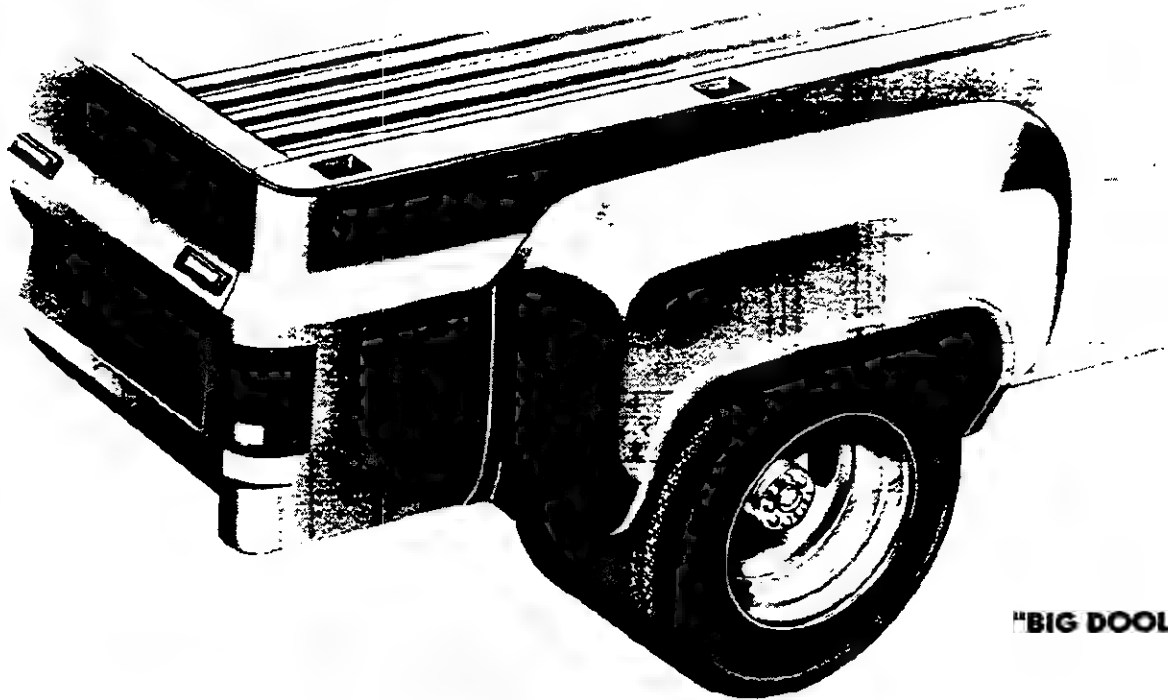

"BIG DOOLEY"

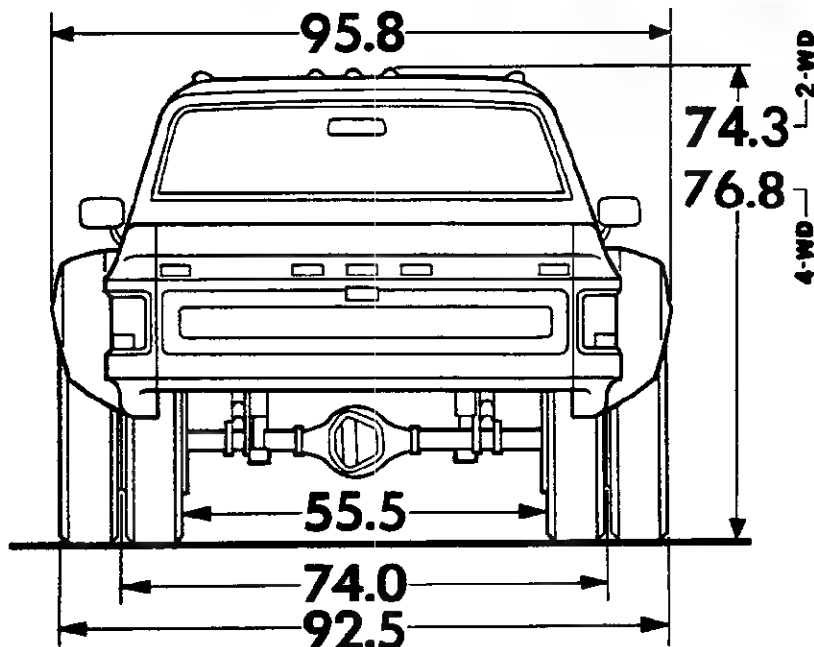

The 8-foot Fleetside/Wideside Pickup Box for dual rear wheel application offers all the features described for single rear wheel application. Additionally, it includes one-piece fenders constructed of fiberglass reinforced plastic bolted to each rear wheelhousing area. This provides an extension to cover the dual rear wheel equipment. Clearance lights are located fore and aft of the wheel openings on the fender extensions. Installation also includes five amber clearance and identification lights mounted on the cab roof along with five red rear clearance and identification lamps mounted on the tailgate (except on Series K30/3500 models where they are standard).

Fleetside/Wideside Pickup Box (Code E63) and dual rear wheels (RPO R05) are available only on models C30903, K30903, C30943, or K30943.


Dana wider track rear axle used when dual rear wheels are ordered on Fleetside/Wideside pickups.

C/K PICKUP FLEETSIDE/WIDESIDE PICKUP BOX

SINGLE REAR WHEEL APPLICATION

Body Ordering Code E63

DIMENSIONS

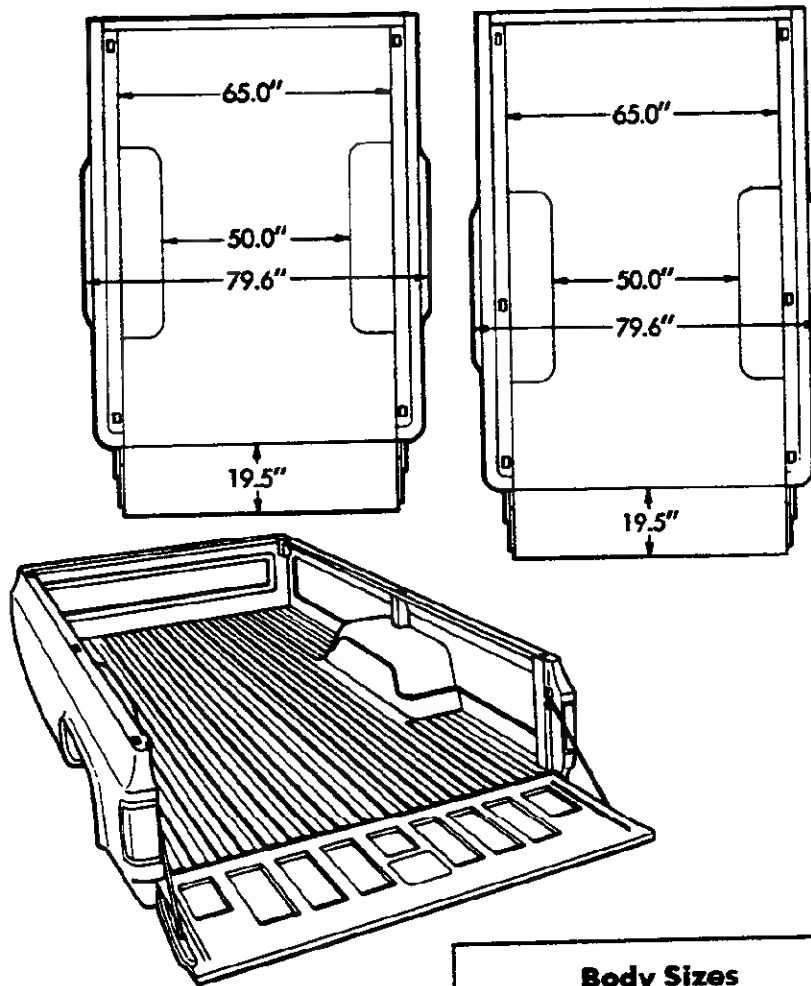


Steel Floor

Body Sizes

Model	Body Length Inside	Volume
C10703 K10703	78.2"	58.4 cu ft
C10903 C20903 C20943 K10903 K20903 K30903 C30903 C30943 K30943	98.1"	74.3 cu ft

Stake Pocket Locations

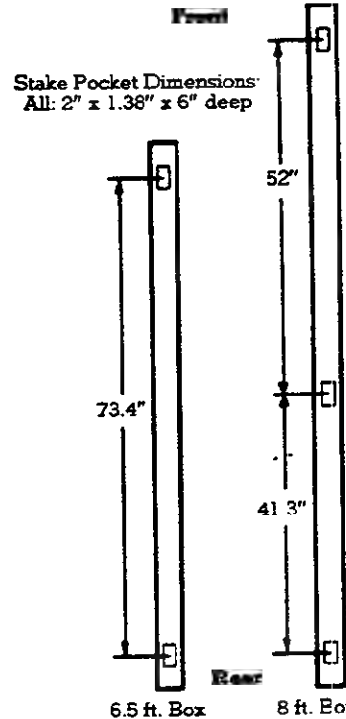

Fleetside/Wideside pickup boxes feature double-walled construction in the side panels and tailgate to prevent load dents from marring the appearance of the outer panels.

All metal body panels are primed for corrosion protection, and the Elpo electro-coating process is used to prime the side panels, tailgate, floor panel, and front panel to assure that all surfaces of these more complicated components—even surfaces not visible—receive a coat of prime paint. Side outer panels and tailgate are fabricated of zinc coated steel and galvanized steel is used for stake pockets, platform panels, and rear wheelhousings to provide additional corrosion protection.

A tight-fitting full-width tailgate holds such loads as grain and sand with minimal loss. It is operated by a mechanically actuated latch and retained in the horizontal position by hinged steel support straps. A quick-release feature allows it to be quickly and easily removed and re-installed by one person. The tailgate latch features one-hand operation for easy opening and closing.


Reinforced pockets (2" x 1.38") for the addition of stake racks are provided to increase the bulk carrying capacity of the box. On 6.5 ft. bodies there are two pockets on each side; on 8 ft. bodies there are three pockets on each side. See the diagram at right above for location of these stake pockets.

C/K PICKUP STEPSIDE/FENDERSIDE PICKUP BOX


Body Ordering Code E62

DIMENSIONS

Stake Pocket Locations

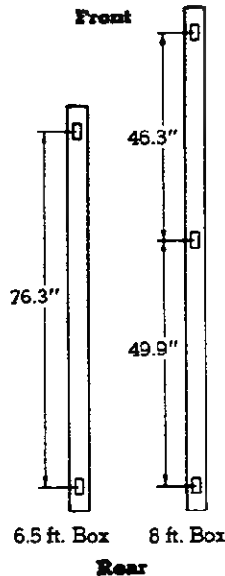

Stake Pocket Dimensions
Front & rear: 2" x 1.38" x 6" deep
Center (8 ft. box only) 2" x 1.38" x 1.8" deep

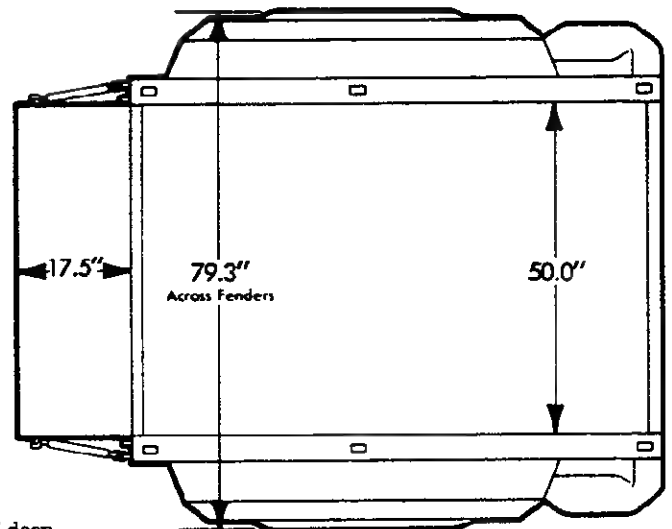

Body Sizes		
Model	Body Length Inside	Volume
C10703 K10703	78.4"	39.7 cu ft
C20903 C30903 K20903	98.3"	49.8 cu ft

The smooth interior walls of the Stepside/Fenderside pickups are a full 50 inches apart, allowing 4-ft-width materials to be earned easily. In fact, with the 98" body, 4' x 8' sheets can be earned without lowering the tailgate.

Floors are constructed of kiln-dried, sealed wood boards with seven flush steel skid strips bolted in place over the expansion joints. A tight-fitting full-width tailgate minimizes loss of bulk loads such as grain or sand. With the tailgate closed, the wedge-type anti-rattle latches give extra support to the side panels. When open, the tailgate is supported by two strong vinyl covered chains.

On each side of the body, Stepside/Fenderside pickups have a running board and step just forward of the fender. This step is a great convenience in jobs requiring frequent

working of the load from the side.

Reinforced pockets (2" x 1.38") for the addition of stake racks are provided to increase the bulk carrying capacity of the box. On 6.5 ft. bodies there are 2 pockets on each side and on 8 ft. bodies there are 3 pockets on each side. See the diagram at left above for location of these stake pockets.



Side panels, tailgate, and front panel are fabricated of 2-side galvanized steel as are the platform cross sills and skid strips.

All metal body panels are primed for corrosion protection, and the Elpo electro-coating process is used to prime the side panels, tailgate, and front panel to assure that all surfaces of these more complicated components—even surfaces not visible—receive a coat of prime paint.



Convenient Side Step

A convenient running board and step on each side of the body facilitates working of cargo from the side.

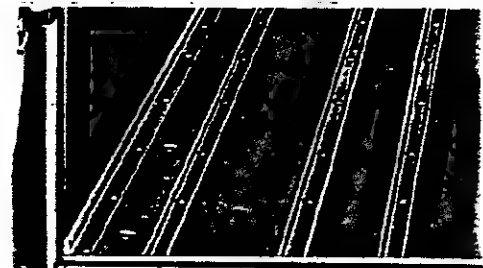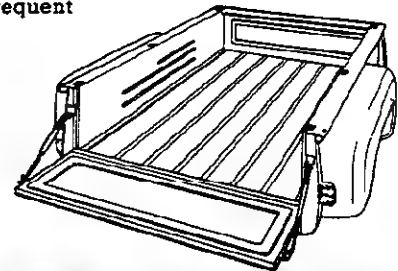

Steel Skid Strips

Seven flush steel skid strips hold floor planks securely, yet allow expansion with changes in temperature and humidity. Recessed bolt heads prevent cargo damage in loading and unloading.

C/K REGULAR CAB PICKUP

INTERIOR AND EXTERIOR COLOR AVAILABILITY CHART

Please Note: Below are the interior trim color and exterior paint combinations recommended by Chevrolet/GMC. The only available primary/secondary exterior color combinations are those shown in the chart below; however, any available interior trim color may be ordered with one of these exterior color combinations if that particular combination is desired by the customer.

INTERIOR COLORS			Decor	Blue	Burgundy	Charcoal	Mahogany	Saddle Tan	
CUSTOM DELUXE/SIERRA Vinyl Bench Seat Deluxe Cloth Bench Seat Custom Vinyl Bench Seat			Std	VDD1 CDD1 XDD1	VEE1 CEE1 XEE1	VJ1 CJJ1 XJJ1	VNN1 CNN1 XNN1	VSS1 CSS1 XSS1	
SCOTTSDALE/HIGH SIERRA Deluxe Cloth Bench Seat Custom Vinyl Bench Seat				Z62	CDD1 XDD1	CEE1 XEE1	CJJ1 XJJ1	CNN1 XNN1	CSS1 XSS1
SILVERADO/SIERRA CLASSIC Custom Vinyl Bench Seat Custom Cloth Bench Seat				YE9	XDD1 LDD1	XEE1 LEE1	XJJ1 LJJ1	XNN1 LNN1	XSS1 LSS1
EXTERIOR COLORS w/ZY1, ZY2, ZY3, ZY4 PAINT		Primary	Secondary	RECOMMENDED INTERIOR TRIM COLOR					
BLACK, MIDNIGHT		19	19		X	X	X	X	
Silver (Metallic)		19	17			X			
Tan, Doeskin		19	61			X		X	
White, Frost		19	12			X			
BLUE, LIGHT (Metallic)		21	21	X		X			
Blue, Midnight		21	29	X					
Silver (Metallic)		21	17	X					
White, Frost		21	12	X					
BLUE, MIDNIGHT		29	29	X		X			
Silver (Metallic)		29	17	X					
White, Frost		29	12	X					
BRONZE, INDIAN (Metallic)		66	66				X	X	
Tan, Doeskin		66	61				X	X	
White, Frost		66	12				X	X	
RED, APPLE		72	72		X	X		X	
Silver (Metallic)		72	17		X	X			
Tan, Doeskin		72	61		X			X	
White, Frost		72	12		X				
SAND, DESERT (Metallic)		64	64			X	X	X	
Black, Midnight		64	19			X		X	
Tan, Doeskin		64	61					X	
White, Frost		64	12					X	
SILVER (Metallic)		17	17	X	X	X			
Black, Midnight		17	19			X			
Blue, Midnight		17	29	X					
Red, Apple		17	72			X			
White, Frost		17	12			X			
TAN, DOESKIN		61	61			X	X	X	
Black, Midnight		61	19			X		X	
White, Frost		61	12				X	X	
WHITE, FROST		12	12	X	X	X	X	X	
Black, Midnight		12	19		X	X			
Blue, Midnight		12	29	X					
Red, Apple		12	72		X				
Tan, Doeskin		12	61					X	
YELLOW, COLONIAL		53	53			X	X	X	
Black, Midnight		53	19			X		X	
Tan, Doeskin		53	61					X	
White, Frost		53	12					X	
w/ZYG PAINT (Interior & Exterior Combinations Shown are the Only Combinations Available)				STRIPE COLOR					
BLACK, MIDNIGHT/Silver (Metallic)		19	17		X			Orange/Black	
BLUE, LIGHT (Metallic)/Blue, Midnight		21	29	X				Bright Blue/Light Blue	
SILVER (Metallic)/Black, Midnight		17	19			X		Orange/Silver	
TAN, DOESKIN/Blue, Midnight		61	29	X				Bright Blue/Tan	
TAN, DOESKIN/Bronze, Indian (Metallic)		61	66					Light Orange/Tan	
TAN, DOESKIN/Red, Apple		61	72		X			Orange/Tan	
WHITE, FROST/Black, Midnight		12	19			X		Orange/White	
WHITE, FROST/Blue, Midnight		12	29	X				Bright Blue/White	
WHITE, FROST/Red, Apple		12	72		X			Orange/White	
w/ZY9 PAINT (Interior & Exterior Combinations Shown are the Only Combinations Available)									
BLACK, MIDNIGHT/Silver (Metallic)		19	17		X	X		Vermilion/Black	
BLACK, MIDNIGHT/Tan, Doeskin		19	61		X	X		Vermilion/Black	
BLUE, LIGHT (Metallic)/Blue, Midnight		21	29	X				Light Blue/Dark Blue	
BLUE, LIGHT (Metallic)/Silver (Metallic)		21	17	X				Dark Blue/Light Blue	
BLUE, LIGHT (Metallic)/White, Frost		21	12	X				Dark Blue/White	
BLUE, MIDNIGHT/Silver (Metallic)		29	17	X				Vermilion/Light Blue	
BRONZE, INDIAN (Metallic)/Tan, Doeskin		66	61				X	Almond/Dark Brown	
RED, APPLE/Black, Midnight		72	19		X	X		Vermilion/Black	
RED, APPLE/Tan, Doeskin		72	61		X			Vermilion/Dark Carmine	
RED, APPLE/White, Frost		72	12		X			Vermilion/Black	
SILVER (Metallic)/Black, Midnight		17	19		X	X		Vermilion/Black	
SILVER (Metallic)/Blue, Midnight		17	29	X		X		Light Blue/Dark Blue	
SILVER (Metallic)/Red, Apple		17	72		X	X		Vermilion/Black	
TAN, DOESKIN/Black, Midnight		61	19			X		Vermilion/Black	
TAN, DOESKIN/Red, Apple		61	72					Vermilion/Dark Carmine	
YELLOW, COLONIAL/Tan, Doeskin		53	61				X	Almond/Dark Brown	
YELLOW, COLONIAL/White, Frost		53	12				X	Almond/Dark Brown	

C/K BONUS & CREW CAB PICKUP

INTERIOR AND EXTERIOR COLOR AVAILABILITY CHART

Please Note: Below are the interior trim color and exterior paint combinations recommended by Chevrolet/GMC. The only available primary/secondary exterior color combinations are those shown in the chart below, however, any available interior trim color may be ordered with one of these exterior color combinations if that particular combination is desired by the customer.


INTERIOR COLORS		Decor	Blue	Burgundy	Saddle Tan
CUSTOM DELUXE/SIERRA Vinyl Bench Seat		Std	VDD1	VEE1*	VSS1
SCOTTSDALE/HIGH SIERRA Vinyl Bench Seat		Z62	VDD1	VEE1	VSS1
Custom Vinyl Bench Seat			XDD1	XEE1	XSS1
Custom Cloth Bench Seat			LDD1	LEE1	LSS1
SILVERADO/SIERRA CLASSIC Custom Vinyl Bench Seat		YE9	XDD1	XEE1	XSS1
Custom Cloth Bench Seat			LDD1	LEE1	LSS1
EXTERIOR COLORS w/ZY1, ZY2, ZY3, ZY4 PAINT	Primary	Secondary	RECOMMENDED INTERIOR TRIM COLOR		
BLACK, MIDNIGHT	19	19		X	X
Tan, Doeskin	19	61			X
BLUE, LIGHT (Metallic)	21	21	X		
Blue, Midnight	21	29	X		
Silver (Metallic)	21	17	X		
White, Frost	21	12	X		
BLUE, MIDNIGHT	29	29	X		
Silver (Metallic)	29	17	X		
White, Frost	29	12	X		
BRONZE, INDIAN (Metallic)	66	66			X
Tan, Doeskin	66	61			X
White, Frost	66	12			X
RED, APPLE	72	72		X	X
Silver (Metallic)	72	17		X	
Tan, Doeskin	72	61		X	X
White, Frost	72	12		X	
SAND, DESERT (Metallic)	64	64			X
Black, Midnight	64	19			X
Tan, Doeskin	64	61			X
White, Frost	64	12			X
SILVER (Metallic)	17	17	X	X	
Blue, Midnight	17	29	X		
TAN, DOESKIN	61	61			X
Black, Midnight	61	19			X
White, Frost	61	12			X
WHITE, FROST	12	12	X	X	X
Black, Midnight	12	19		X	
Blue, Midnight	12	29	X		
Red, Apple	12	72		X	
Tan, Doeskin	12	61			X
YELLOW, COLONIAL	53	53			X
Black, Midnight	53	19			X
Tan, Doeskin	53	61			X
White, Frost	53	12			X
w/ZY5 or ZY9 PAINT (Interior & Exterior Combinations Shown are the Only Combinations Available)					
BLACK, MIDNIGHT/Silver (Metallic)	19	17		X	
BLACK, MIDNIGHT/Tan, Doeskin	19	61		X	X
BLUE, LIGHT (Metallic)/Blue, Midnight	21	29	X		
BLUE, LIGHT (Metallic)/Silver (Metallic)	21	17	X		
BLUE, LIGHT (Metallic)/White, Frost	21	12	X		
BLUE, MIDNIGHT/Silver (Metallic)	29	17	X		
BRONZE, INDIAN (Metallic)/Tan, Doeskin	66	61			X
RED, APPLE/Black, Midnight	72	19		X	
RED, APPLE/Tan, Doeskin	72	61		X	X
RED, APPLE/White, Frost	72	12		X	
SILVER (Metallic)/Black, Midnight	17	19		X	
SILVER (Metallic)/Blue, Midnight	17	29	X		
SILVER (Metallic)/Red, Apple	17	72		X	
TAN, DOESKIN/Black, Midnight	61	19			X
TAN, DOESKIN/Red, Apple	61	72			X
YELLOW, COLONIAL/Tan, Doeskin	53	61			X
YELLOW, COLONIAL/White Frost	53	12			X
					STRIPE COLOR
					Vermilion/Black
					Vermilion/Black
					Light Blue/Dark Blue
					Dark Blue/Light Slate
					Dark Blue/Light Slate
					Vermilion/Light Slate
					Almond/Dark Brown
					Vermilion/Black
					Vermilion/Black
					Vermilion/Dark Carmine
					Vermilion/Black
					Vermilion/Black
					Light Blue/Dark Blue
					Vermilion/Black
					Vermilion/Black
					Vermilion/Dark Carmine
					Almond/Dark Brown
					Almond/Dark Brown

C/K PICKUP

SOLID AND TWO-TONE* EXTERIOR COLOR COMBINATIONS

The application of paint for solid and two-tone exterior color combinations is shown below

Solid color paint (ZY1) is standard on all models. All painted areas of the cab, front end sheet metal, and box are the same color. A white decal is applied to the raised "Chevrolet/GMC" lettering on the tailgate, except with Frost White, then a black decal is applied. (A bright trim plate covers the lettering on Fleetside/Wideside models when the Silverado/Sierra Classic Model Option is ordered.)

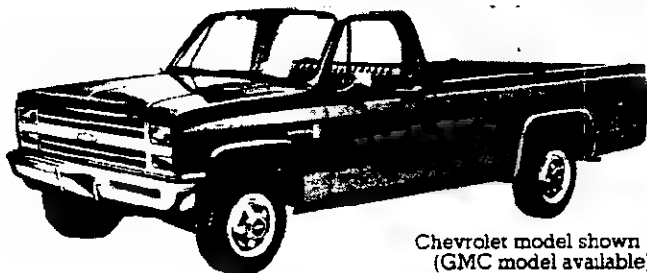


Chevrolet model shown
(GMC model available)

Conventional two-tone (ZY2) consists of the secondary color on cab roof and cab back panel above the belt line, with the elected primary color on the remainder of the cab, on the front end sheet metal, and on the pickup box. A white decal is applied to the raised "Chevrolet/GMC" lettering on the tailgate, except when the primary color is Frost White, then a black decal is applied. (A bright trim plate covers the lettering on Fleet side/Wideside models when the Silverado/Sierra Classic Model Option is ordered.) Includes cab back panel applique and molding, except with the Silverado/Sierra Classic Model Option where it is already included.




GMC model shown
(Chevrolet model available)

Special two-tone (ZY3) paint colors are available only on single rear wheel Fleetside/Wideside Pickup models and include the YG1 molding package consisting of black vinyl body side and rear moldings with bright trim, bright wheel opening moldings, and bright trim for front side marker lights and tail lights (except with the YG3 molding package or the Silverado/Sierra Classic Model Option where bright body side and rear moldings with black paint trim are substituted). The primary color is applied to the areas above the moldings (including the cab roof). The secondary color is applied to the areas below the moldings. A white decal is applied to the raised "Chevrolet/GMC" lettering on the tailgate, except when the primary color is Frost White, then a black decal is applied. (A bright trim plate covers the lettering when the Silverado/Sierra Classic Model Option is ordered.)

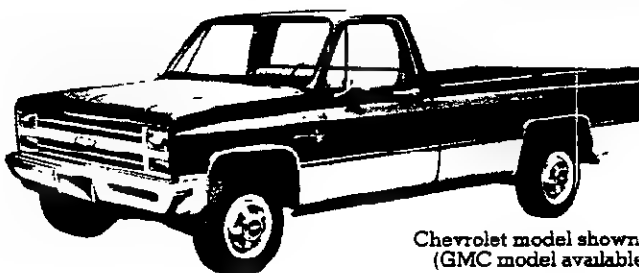

Chevrolet model shown
(GMC model available)

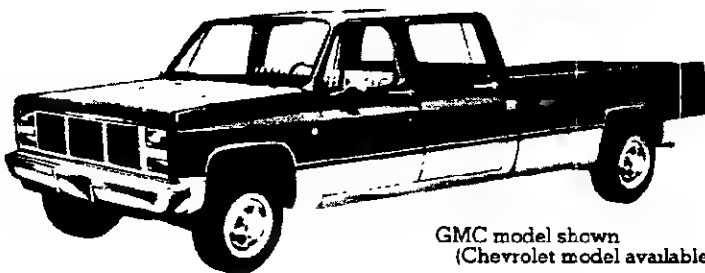

GMC model shown
(Chevrolet model available)

*Optional at extra cost

C/K PICKUP

SOLID AND TWO-TONE* EXTERIOR COLOR COMBINATIONS

The application of paint for solid and two-tone exterior color combinations is shown below

Deluxe two-tone (ZY4) paint colors are available only on single rear wheel Fleetside/Wideside Pickup models and include the YG1 molding package consisting of black vinyl body side and rear moldings with bright trim, bright wheel opening moldings, and bright trim for front side marker lights and tail lights (except with the YG3 molding package or the Silverado/Sierra Classic Model Option where bright body side and rear moldings with black paint trim are substituted). Also includes cab back panel applique and molding (except with Silverado/Sierra Classic Model Option where it is included). The cab roof, cab back panel above the belt line, and the area below the moldings are painted the secondary color with the primary color applied on all other areas. A white decal is applied to the raised "Chevrolet/GMC" lettering on the tailgate, except when the primary color is Frost White, then a black decal is applied. (A bright trim plate covers the lettering when the Silverado/Sierra Classic Model Option is ordered.)



GMC model shown
(Chevrolet model available)



Chevrolet model shown
(GMC model available)

Custom two-tone (ZY6) paint colors and trim are available only on single rear wheel Fleetside/Wideside regular cab pickup models (see Interior and Exterior Color Availability Chart). The package includes tape decal striping keyed to the exterior body color. This striping is applied along the hood, body sides, tailgate and up the cab lock pillar and across the cab roof to separate the primary and secondary colors.

The areas on the hood and body between and above the decal, and the back of the cab and the inside of the pickup box are painted the secondary color; all other areas are painted the primary color. A bright spring-loaded, stand-up type hood ornament is included on gasoline engine models.

When used with the Scottsdale/High Sierra or Silverado/Sierra Classic Model Options, the body side moldings and the cab back panel applique and molding included with these models are deleted.



GMC model shown
(Chevrolet model available)

*Optional at extra cost

C/K PICKUP

SOLID AND TWO-TONE* EXTERIOR COLOR COMBINATIONS

The application of paint for solid and two-tone exterior color combinations is shown below.

Exterior Decor Package (ZY5) paint colors and trim are available only on single rear wheel Fleetside/Wideside Bonus/Crew Cab pickup models (see Interior and Exterior Color Availability Chart). The package includes the moldings described under Special Two-Tone. In addition, it includes dual-tone body side and rear tape decal striping keyed to the exterior body color. This striping is applied to the front fenders, side doors and pickup box sides and tailgate a few inches above the styling crease line.

The areas above the striping and below the moldings are painted the primary paint color. The secondary color choice is used between the striping and the molding. A bright spring-loaded stand-up type hood ornament is included on gasoline engine models.

When used with the Silverado/Sierra Classic Model Option, the cab back panel applique and molding included with this model is deleted.




GMC model shown
(Chevrolet model available)


Special Big Dooley two-tone (ZY9) paint colors are available only on Fleetside/Wideside Pickup models with dual rear wheels (see Interior and Exterior Color Availability Chart). The package includes dual-tone body side and rear tape decal striping keyed to the exterior body color. This striping is applied to the front fenders, side doors and pickup box sides and tailgate a few inches above the styling crease line.

The areas above the striping are painted the primary paint color, and the areas below are painted the secondary color. A bright, spring-loaded, stand-up type hood ornament is included on gasoline engine models. Bright trim for front side marker lamps, rear wheel opening extension clearance lamps, and tail lamps also is included for standard Custom Deluxe/Sierra models.

When used with the Silverado/Sierra Classic Model Option, the cab back panel applique and molding included with this model is deleted.

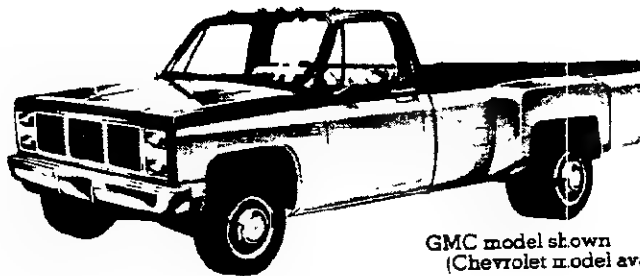

GMC model shown
(Chevrolet model available)

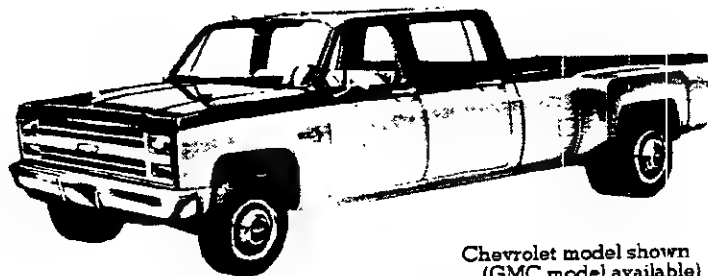


Chevrolet model shown
(GMC model available)

*Optional at extra cost

C/K PICKUP

VALUE DECOR PACKAGE

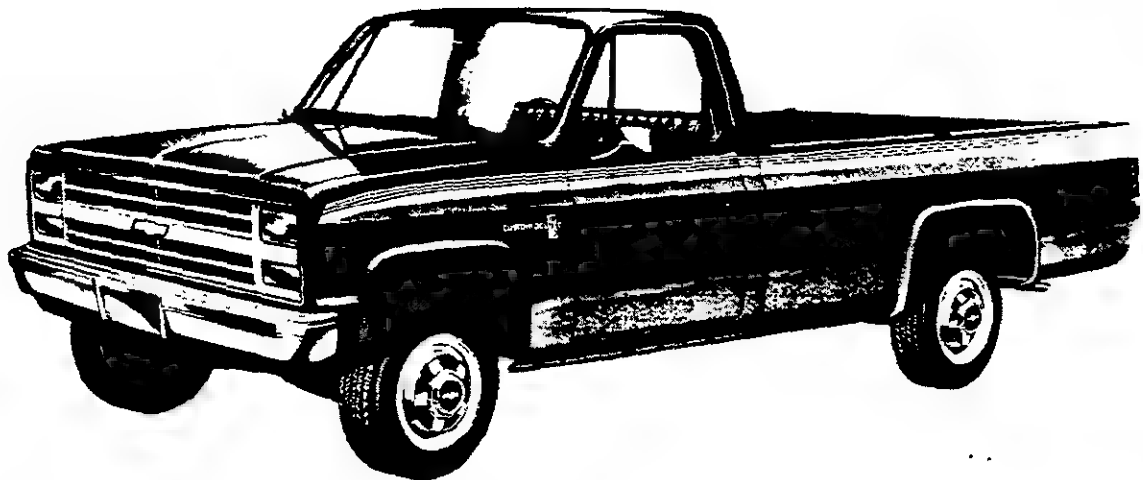

YJ6 VALUE DECOR PACKAGE

(C/K Fleetside/Wideside Pickups with single rear wheels only)

The Value Decor striping package is available in four colors, and requires ZY1 solid paint. See the chart below for color availability. The stripes are applied a few inches above the styling crease line on the front fenders, side doors and pickup box sides and tailgate. The bottom stripe is 1½" wide and the three upper ¼" stripes are separated by a ¼" clear space which allows the exterior paint color to show through between them. Includes a blacked-out grille and headlamp bezel treatment on all models and Rally wheels on C/K 10/1500 models. Not available with YE9 Silverado/Sierra Classic Trim, R05 Dual Rear Wheels or body side moldings.

YJ6 COLOR AVAILABILITY CHART

Exterior Color	Primary	Secondary	Available Stripe Colors			
			White	Red	Blue	Black
Black, Midnight	19	19	X	X		
Blue, Light (Metallic)	21	21	X		X	X
Blue, Midnight	29	29	X		X	
Bronze, Indian (Metallic)	66	66	X			
Red, Apple	72	72	X			X
Sand, Desert (Metallic)	64	64	X	X		X
Silver (Metallic)	17	17	X	X	X	X
Tan, Doeskin	61	61	X	X		X
White, Frost	12	12		X	X	X
Yellow, Colonial	53	53	X			X

NOTES

ENGINE & COOLING

VALUE FEATURES

1.9 Liter (119 Cu. In.) L4 engine (S-10/15 short wheelbase pickup only)

- 2-barrel carburetor
- Aluminum cylinder head
- Single overhead camshaft
- Hemispherical combustion chamber
- Transistorized ignition.

2.5 Liter (151 Cu. In.) L4 engine (Astro/Safari, S-10/15 models only)

- Standard engine on all Astro/Safari and S-10/15 4x4, extended cab, Chassis-Cab, Blazer, and 4x2 117.9" WB pickup gasoline engine models
- Electronic fuel injection.

2.2 Liter (137 Cu. In.) L4 Diesel engine (S-10/15 pickup models only)

- Standard engine on S-10 Diesel Model pickups (2WD only)
- Longer stroke than bore diameter for good torque
- Quick-On system with a pre-combustion chamber helps start engine in 3.5 seconds or less
- Available in all states.

2.8 Liter (173 Cu. In.) V6 engine (S-10/15 models only)

- 2-barrel carburetor
- 8.5 to 1 compression ratio
- More horsepower and torque for heavy-duty jobs and trailering applications.

4.3 Liter (262 Cu. In.) V6 engine

- Staged 4-barrel carburetor for more efficient performance
- Cylinder head with swirl port design
- Centralized spark plugs
- Even firing
- High compression (9.3:1)
- Electronic spark control to control spark knock.

4.8 Liter (292 Cu. In.) L6 engine

- Larger displacement for added load-hauling agility
- Same engine used in medium-duty trucks for its durability. Features include: aluminum alloy pistons, forged steel connecting rods, aluminized face intake valves, stellite faced exhaust valves with rotators and hardened seats.

5.0 Liter (305 Cu. In.) V8 engine with Electronic Spark Control

- Good performance, efficient operation on unleaded fuel
- Horsepower and torque ratings similar to the 5.7 liter V8
- High 9.2 to 1 compression ratio
- Electronic spark control unit eliminates spark knock by adjusting spark advance automatically.

5.7 Liter (350 Cu. In.) V8 engine

- Available for higher all-around performance requirements
- Four-barrel carburetor provides added power when needed
- Comes with cast-iron 4.00-in.-bore cylinder case with forged steel connecting rods.

7.4 Liter (454 Cu. In.) V8 engine

- Available for big loads and heavy towing. This high-torque 454 V8 with a 4-barrel carburetor operates on regular grade gasoline. Camshaft is designed for added efficiency.

6.2 Liter (379 Cu. In.) V8 Diesel engine

- The 6.2 liter V8 diesel engine (RPO LH6 with light-duty emissions, and RPO LL4 with heavy-duty emissions) is available on all C/K/G/P models, except G10/1500 Chevy Van/Vandura and G10/1500 Sportvan/Rally and the 178" WB Motor Home Chassis. This engine, introduced in 1982, is designed specifically for truck applications with heavy usage; it features heavy-duty construction with emphasis on fuel efficiency with excellent emission control characteristics.

ENGINE & COOLING

VALUE FEATURES (CONT'D)

Early Fuel Evaporation (Gasoline engine models)

- Vacuum motor closes exhaust manifold heat valve on cold engine
- Hot gases flowing around inlet manifold preheat incoming fuel
- Fast warm-up, good drivability
- Used on most engines.

High Energy Ignition System (Gasoline engine models)

- Magnetic pulse generator, electronic module replace ignition points, condenser and rubbing block
- Coil design provides a spark up to 85% hotter than conventional system
- Solid-state design eliminates cost of replacing points, condenser
- Fires worn plugs
- Reduces cost of frequent plug replacement
- Fires lean or marginal mixtures
- Quick starts help reduce battery drain.

Catalytic converter (Gasoline engine models)

- Changes hydrocarbons and carbon monoxide to less harmful emissions
- Permits tuning engines for better drivability, increased fuel efficiency
- Stainless steel shell and exhaust pipe
- Standard on all Light-duty trucks up to 8500 lbs. GVWR (except Step-Van/Value Van, FC Chassis)
- Requires use of unleaded fuel exclusively.

Coolant recovery system

- Excess coolant collects in reservoir, returns to radiator automatically when it cools
- Helps maintain proper coolant levels
- Standard on all C, K, G, P, S, M models.

ENGINE & COOLING

INDEX

ENGINES

	Page
1.9 LITER (119 2-bbl) I4 ENGINE (S-10/15)	2
SPECIFICATIONS—1.9L/119 I4 ENGINE (S-10/15)	3, 4
2.5 LITER (151 EFI) I4 ENGINE (S-10/15)	5
SPECIFICATIONS—2.5L/151 I4 ENGINE (Astro/Safari, S-10/15)	6, 7
2.2 LITER (137 Cu. In.) I4 DIESEL ENGINE (S-10/15)	8
SPECIFICATIONS—2.2L/137 I4 ENGINE (S-10/15)	9, 10
2.8 LITER (173 2-bbl) V6 ENGINE (S-10/15)	11
SPECIFICATIONS—2.8L/173 V6 ENGINE (S-10/15)	12, 13
4.3 LITER (262 EFI) V6 ENGINE (El Camino/Caballero)	14
SPECIFICATIONS—4.3L/262 V6 ENGINE	15, 16
4.3 LITER (262 4-bbl) V6 ENGINE	17
4.8 LITER (292 1-bbl) IN-LINE SIX ENGINE	18
SPECIFICATIONS—4.3L/262 V6 ENGINE	19, 20
5.0 LITER (305 4-bbl) V8 ENGINE (El Camino/Caballero)	21
5.0 LITER (305 4-bbl) V8 ENGINE w/ESC	22
5.0 LITER (305 4-bbl) V8 ENGINE	23
SPECIFICATIONS—5.0L/305 V8 ENGINES	24, 25
5.7 LITER (350 4-bbl) V8 ENGINE	25, 26, 27
SPECIFICATIONS—5.7L/350 V8 ENGINES	28, 29
6.2 LITER DIESEL ENGINE FEATURES	30, 31, 32, 33
6.2 LITER (379 Cu. In.) V8 DIESEL ENGINE	34, 35
SPECIFICATIONS—6.2L/379 V8 DIESEL ENGINE	36, 37
7.4 LITER (454 4-bbl) V8 ENGINE	38
SPECIFICATIONS—7.4L/454 V8 ENGINE	39, 40

COOLING SYSTEMS

SPECIFICATIONS—STANDARD	41
SPECIFICATIONS—OPTIONAL	42, 43, 44, 45, 46

FUEL TANKS


SPECIFICATIONS	47
----------------	----

EMISSION CONTROLS

EMISSION CONTROL EQUIPMENT	48, 49, 50
----------------------------	------------

1.9 LITER (119 2-bbl) L4

(Ordering Code LR1)

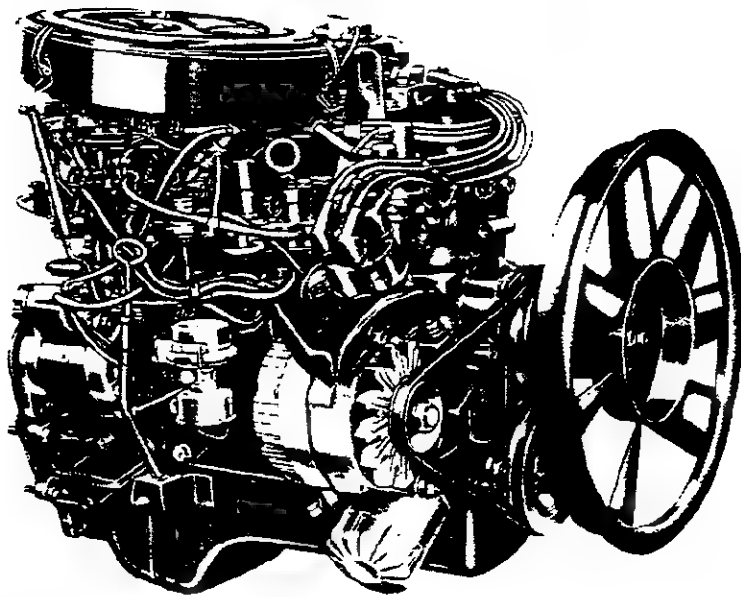

Applications

Standard: S-10/15 4X2 Regular Cab Pickups (108.3" WB models only)

Optional: None

Basic Specifications


Engine type Overhead Cam In-line 4
 Piston displacement (Liter/Cu. In.) 1.9/119
 Bore & stroke (nominal) 3.42" x 3.23"
 Compression ratio 8.4:1
 Carburetor type 2-barrel
 Exhaust Single

Test Procedures

These curves represent full throttle performance as obtained from a dynamometer test simulating actual operating conditions when the engine is in the vehicle, with ratings corrected to barometric pressure of 29.32" mercury and 77°F dry air.

Engine Ratings

SAE net horsepower (77°F) 82 @ 4600 rpm
 SAE net torque, lb-ft (77°F) 101 @ 3000 rpm

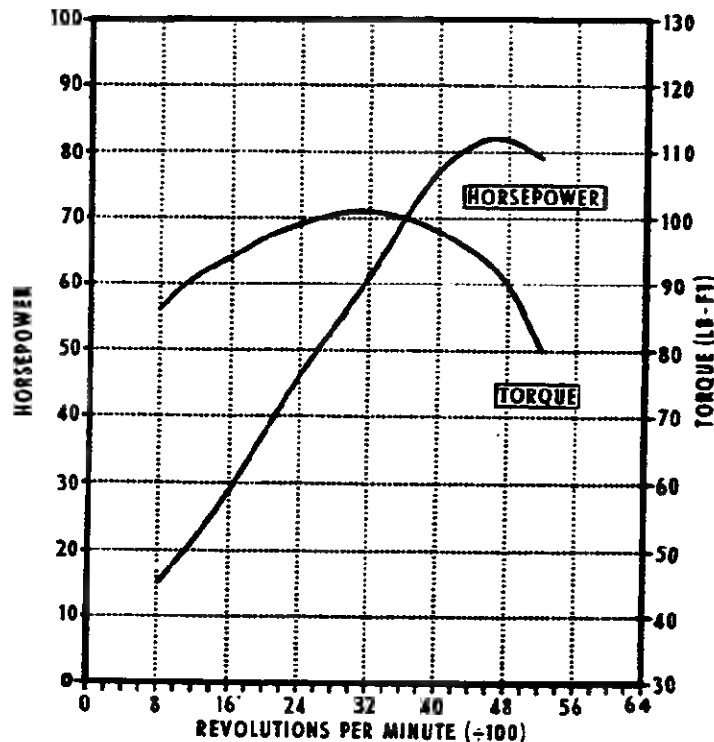

1.9 LITER (119 2-bbl) L4

SPECIFICATIONS

		1.9 Liter/119 2-bbl L4
Basic Description		Four-cylinder in-line; overhead cam with cast iron block and aluminum cylinder head
Displacement (liters/cu. in.)		1.9/119
Bore & Stroke (in)		3.42 x 3.23
Compression Ratio		8.4:1
Firing Order		1-3-4-2
SAE Net Horsepower @ rpm		82 @ 4600
SAE Net Torque (lb-ft) @ rpm		101 @ 3000
Air Cleaner		Replaceable wet-paper element
Camshaft		
Intake Valve	Opens	21° BTDC
	Closes	65° ABDC
Exhaust Valve	Opens	55° BBDC
	Closes	20° ATDC
Intake Duration Ramp		266°
Exhaust Duration Ramp		255°
Carburetor		
Type		2-Barrel downdraft
Make		Hitachi
Venturi ID (in)		Pr - 9; sec. - 1.2
Throttle Bore (in)		Pr. - 1.181; sec. - 1.339
Choke Control		Automatic
Connecting Rods		
Material		Forged steel
Length (in)		5.2557-5.2561
Bearings		Steel-backed with tri-metal
Crankcase Ventilation		Closed positive
Crankshaft		
Material		Heat-treated forged steel
Number of Counterweights		4
Main Journals (in)		2.2016-2.2022
Crankpin Journal (in)		1.9262-1.9268
Torsional Damper		None
Bearings		Steel-backed with tri-metal
Distributor		Nippon Denso Co., Ltd.; centrifugal & vacuum advance
Fuel Filters		
Carburetor		In-line throwaway type
Fuel Tank		Nylon mesh screen
Lubrication System		Full pressure
Main Bearings		Direct pressure
Camshaft Bearings		Direct pressure
Connecting Rods		Direct pressure
Valves & Tappets		Gravity
Cylinder Walls		Splash
Piston Pins		Splash


1.9 LITER (119 2-bbl) L4

SPECIFICATIONS

	1.9 Liter/119 2-bbl L4
Oil Capacity (qts)	
With filter change	4.2
W/o filter change	3.8
Oil Filter	
Standard	Full flow; throwaway type
Capacity (pt)	0.8
Oil Pump	
Type	Trochoid
Capacity (gpm)	3.70 @ 1400 rpm
Normal Pressure (psi)	57
Pistons	
Type	Cam-ground
Material	Aluminum alloy
Skirt	Tin plated full
Head	Concave
Piston Pins	
Type	Semi-Floating
Material	Case hardened steel
Piston Rings	
Compression Rings	
Number	2
Type	1st: taper face, 2nd: taper face, under-cut
Material	1st. Chrome plated cast iron, 2nd. Cast Iron
Oil Control Rings	
Number	1
Type	Multi-piece
Material	Chrome plated steel
Thermostat	Fuji-Thompson Wax pellet; 180°F
Valve Train	
Type	Overhead cam rocker arm acting
Tappets	Mechanical - adjustable
Valve Lash	In: .006 Exh. .010
Intake Valves	
Material	Alloy steel and chrome plated stems
Head Diameter (in)	1.587 - 1.591
Face Coating	None
Seats	Sintered iron inserted in cylinder head
Exhaust Valves	
Material	Alloy steel and chrome plated stems
Head Diameter (in)	1.335 - 1.339
Face Coating	None
Seats	Sintered iron inserted in cylinder head
Rotators	None
Water Pump	
Type	Centrifugal
Capacity (gpm)	4.2 @ 6000 rpm

2.5 LITER (151 EFI) L4

Ordering Code LN8

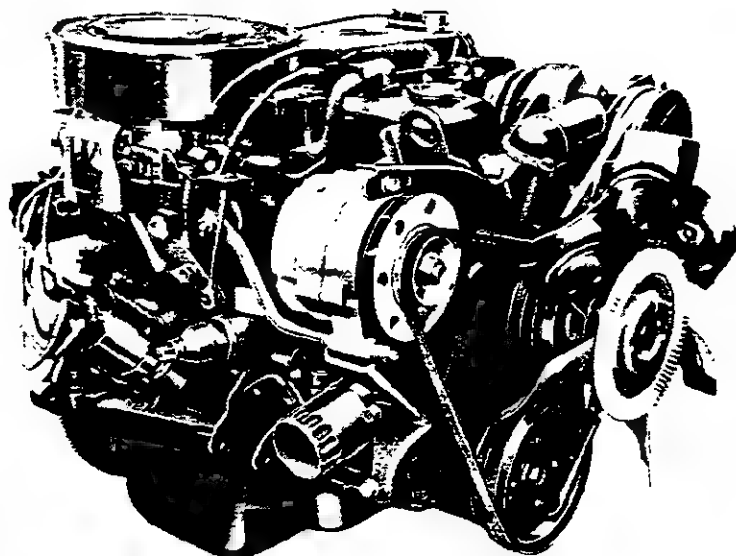

Applications

Standard: Astro/Safari, S-10/15 4x2 Regular Cab Pickup (except 108.3" WB); S-10/15 Extended Cab Pickup, S-10/15 Blazer/Jimmy, S-10/15 4X4 Regular Cab, S-10/15 Chassis-Cabs and 117.9" WB 4X2 Pickups

Optional: S-10/15 4X2 Regular Cab Pickup (108.3" WB only)

Basic Specifications

Engine type	In-line 4
Piston displacement (Liter/Cu. In.)	2.5/151
Bore & stroke (nominal)	4.0 x 3.0
Compression ratio	9.0:1
Fuel delivery	EFI
Exhaust	Single

Test Procedures

These curves represent full throttle performance as obtained from a dynamometer test simulating actual operating conditions when the engine is in the vehicle, with ratings corrected to barometric pressure of 29.32" mercury and 77°F dry air.

Engine Ratings

SAE net horsepower (77°F)	92 @ 4400 rpm
SAE net torque, lb-ft (77°F)	134 @ 2800 rpm

2.5 LITER (151 EFI) L4

SPECIFICATIONS

Basic Description		2.5 Liter/151 EFI L4
		Four-cylinder in-line; valve-in-head with cast iron block
Displacement (liters/cu. in.)		2.5/151
Bore & Stroke (in)		4.0 x 3.0
Compression Ratio		9.0:1
Firing Order		1-3-4-2
SAE Net Horsepower @ rpm		92 @ 4400
SAE Net Torque (lb-ft) @ rpm		134 @ 2800
Air Cleaner		Replaceable paper element
Camshaft		
Intake Valve	Opens	33° BTDC
	Closes	79° ABDC
Exhaust Valve	Opens	74° BBDC
	Closes	38° ATDC
Intake Duration		292°
Exhaust Duration		292°
Carburetor		
Type		Throttle Body Injection
Make		Rochester
Venturi ID (in)		N.A.
Throttle Bore (in)		1.69
Choke Control		None
Connecting Rods		
Material		Cast Alumin. steel
Length (in)		6.05
Bearings		Steel-backed aluminum with overplate
Crankcase Ventilation		Closed positive
Crankshaft		
Material		Nodular Iron
Number of Counterweights		4
Main Journals (in)		2.30
Crankpin Journal (in)		2.0
Torsional Damper		None
Bearings		Steel-backed aluminum with overplate
Distributor		High Energy Delco Remy centrifugal & vacuum advance
Fuel Filters		
Carburetor		In-line throwaway type
Fuel Tank		Nylon mesh screen
Lubrication System		Controlled full pressure
Main Bearings		Direct pressure
Camshaft Bearings		Direct pressure
Connecting Rods		Direct pressure
Valves & Tappets		Pressure and Gravity
Cylinder Walls		Cross-sprayed throw-off from rod bearing
Piston Pins		Cross-sprayed throw-off from rod bearing

2.5 LITER (151 EFI) L4

SPECIFICATIONS

	2.5 Liter/151 EFI L4
Oil Capacity (qts)	
With filter change	2.32
W/o filter change	3.0
Oil Filter	
Standard	Full flow; throwaway type
Capacity (pt)	0.32
Oil Pump	
Type	Spur Gear
Capacity (gpm)	2.4 @ 2200 rpm
Normal Pressure (psi)	45 @ 2200 rpm
Pistons	
Type	Cam-ground
Material	Aluminum alloy
Skirt	Slotted with steel strut
Head	Flat
Piston Pins	
Type	Rod shrink fit to pin
Material	Aluminum filled fine grain steel
Piston Rings	
Compression Rings	
Number	2
Type	Upper — barrel; lower — inside bevel
Material	Cast iron alloy
Oil Control Rings	
Number	1
Type	Multi-piece
Material	Chrome plated steel
Thermostat	Harnson; 195°F
Valve Train	
Type	Individually mounted rocker arms, push rod actuated
Tappets	Hydraulic
Valve Lash	Zero
Intake Valves	
Material	Alloy steel and chrome plated stems
Head Diameter (in)	1.72
Face Coating	None
Seats	Machined in cylinder head
Exhaust Valves	
Material	High alloy steel
Head Diameter (in)	1.50
Face Coating	None
Seats	Machined in cylinder head, induction hardened
Rotators	None
Water Pump	
Type	Centrifugal
Capacity (gpm)	6 @ 1000 rpm

2.2 LITER (137 DIESEL) L4

Ordering Code LQ7

Applications

Standard: S-10/15 Diesel Model Pickups

Optional: None

Basic Specifications

Engine type Overhead Valve In-line 4

Piston displacement (Liter/Cu. In.) 2.2/137


Bore & stroke (nominal) 3.46 x 3.62

Compression ratio 21:1

Exhaust Single

Test Procedures


These curves represent full throttle performance as obtained from a dynamometer test simulating actual operating conditions when the engine is in the vehicle, with ratings corrected to barometric pressure of 29.00" mercury and 85°F dry air.

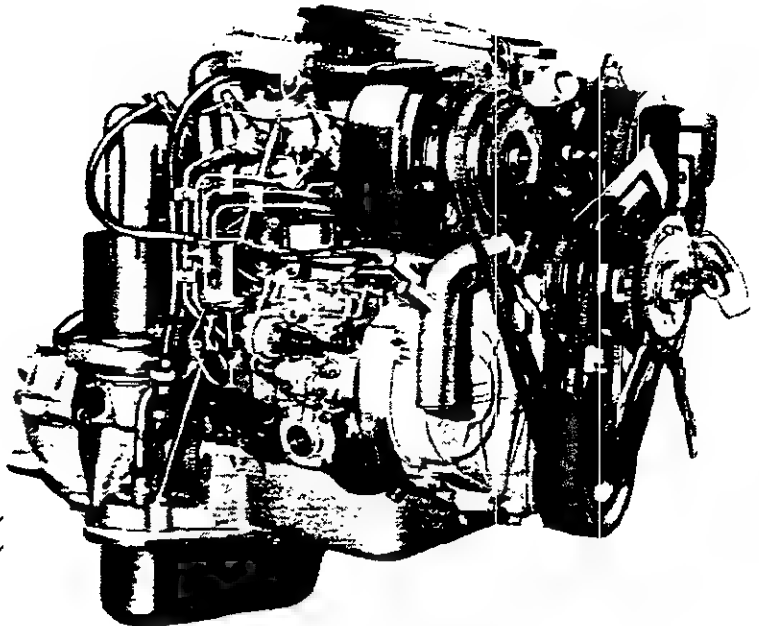

Engine Ratings

SAE net horsepower (85°F) 62 @ 4300 rpm

SAE net torque, lb-ft (85°F) 96 @ 2200 rpm

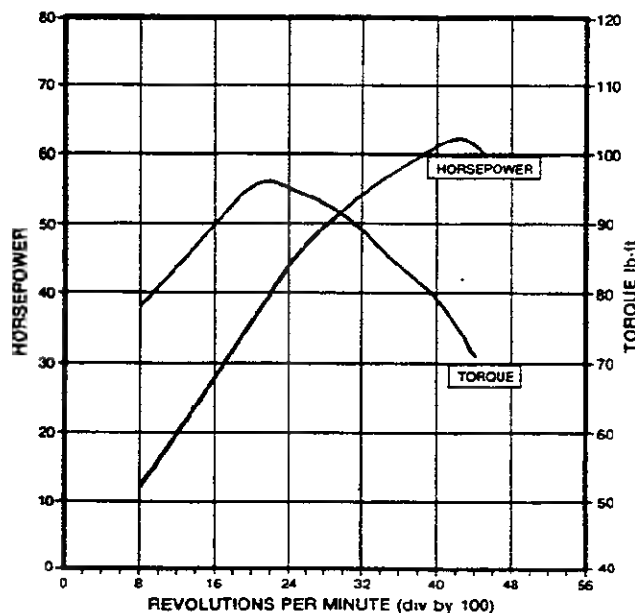

2.2 LITER (137 DIESEL) L4

SPECIFICATIONS

Basic Description		2.2 Liter/137 L4 Diesel
		Four-cylinder in-line; overhead valve with cast iron block and cylinder head
Displacement (liters/cu. in.)		2.2/137
Bore & Stroke (in)		3.46 x 3.62
Compression Ratio		21:1
Firing Order		1-3-4-2
SAE Net Horsepower @ rpm		62 @ 4300
SAE Net Torque (lb-ft) @ rpm		96 @ 2200
Air Cleaner		Replaceable wet-paper element
Camshaft		
Intake Valve	Opens	16° BTDC
	Closes	54° ABDC
Exhaust Valve	Opens	56° BBDC
	Closes	14° ATDC
Intake Duration Ramp		250°
Exhaust Duration Ramp		250°
Fuel System		
Lift Pump-Type		Bosch VE Distributor Type—Timing belt driven
Fuel Shut-off		Electric solenoid
Injectors		Throttle type
Injection Pressure		1565-1635 psi
Actuation		Automatic
Fuel Injection Timing (Static)		15° BTDC
Connecting Rods		
Material		Forged steel
Length (in)		5.2557-5.2561
Bearings		Steel-backed with tri-metal
Crankcase Ventilation		Vented Breather
Crankshaft		
Material		Heat-treated forged steel
Number of Counterweights		4
Main Journals (in)		2.3591-2.3594
Crankpin Journal (in)		2.0835-2.0839
Torsional Damper		None
Bearings		Steel-backed with tri-metal
Fuel Filters		
External		Cartridge type w/water separator
Fuel Tank		Wire mesh
Lubrication System		Full pressure
Main Bearings		Direct Pressure
Camshaft Bearings		Direct Pressure
Connecting Rods		Direct Pressure
Valves & Tappets		Gravity
Cylinder Walls		Splash
Piston Pins		Splash

2.2 LITER (137 DIESEL) L4

SPECIFICATIONS

	2.2 Liter/137 L4 Diesel
Oil Capacity (qts)	
With filter change	6.3
Oil Filter	
Standard	Full flow; throwaway type
Capacity (pt)	1.5
Oil Pump	
Type	Trochoid
Capacity (gpm)	3.43 @ 1000 rpm
Normal Pressure (psi)	60
Pistons	
Type	Cam-ground
Material	Aluminum alloy
Skirt	Tin plated full
Head	Concave
Piston Pins	
Type	
Material	Case hardened steel
Piston Rings	
Compression Rings	
Number	2
Type	1st: taper face; 2nd: taper face, under-cut
Material	1st: Chrome plated cast iron
Oil Control Rings	
Number	1
Type	Multi-piece
Material	Chrome plated steel
Thermostat	Fuji-Thompson Wax pellet; 180°F
Valve Train	
Type	Push rod activates rocker arm
Tappets	Solid
Valve Lash	Intake and Exhaust— .016 (cold); .015 (hot)
Intake Valves	
Material	Alloy steel and chrome plated stems
Head Diameter (in)	1.57
Face Coating	Tufrided
Seats	Alloy steel inserts
Exhaust Valves	
Material	Alloy steel and chrome plated stems
Head Diameter (in)	1.34
Face Coating	Tufrided
Seats	Alloy steel inserts
Rotators	
Water Pump	
Type	Centrifugal
Capacity (gpm)	26.4 @ 3000 rpm

2.8 LITER (173 2-bbl) V6

(Ordering Code LR2)

Applications

Standard: None

Optional: S-10/15 Pickups, Chassis-Cab, Blazer/Jimmy

Basic Specifications

Engine type	Valve-in-head
Piston displacement (Liter/Cu. In.)	2.8/173
Bore & stroke (nominal)	3.50" x 2.99"
Compression ratio	8.5:1
Carburetor type	2-barrel
Exhaust - Single	All

Test Procedures

These curves represent full-throttle performance as obtained from a dynamometer test simulating actual operating conditions when the engine is in the vehicle, with ratings corrected to barometric pressure of 29.32" mercury and 77°F dry air.

Engine Ratings

SAE net horsepower (77°F)	115 @ 4800 rpm
SAE net torque, lb-ft (77°F)	150 @ 2100 rpm

2.8 LITER (173 2-bbl) V6

SPECIFICATIONS

		2.8 Liter/173 2-bbl V6
Basic Description		V6; Valve-in-head
Displacement (Liter/Cu. In.)		2.8/173
Bore & Stroke		3.50 x 2.99
Compression Ratio		8.5:1
Firing Order		1-2-3-4-5-6
SAE Net Horsepower @ rpm		115 @ 4800
SAE Net Torque (lb-ft) @ rpm		150 @ 2100
Air Cleaner		Replaceable paper element
Camshaft		
Bearings		Steel-backed aluminum w/overplate
Intake Valve	Opens	7° BTC
(excluding ramps)	Closes	50° ABC
Exhaust Valve	Opens	51° BBC
(excluding ramps)	Closes	24° ATC
Intake Duration w/o ramp		237°
Exhaust Duration w/o ramp		255°
Carburetor		
Type		2-barrel
Make		Rochester
Venturi ID (in)		1.218
Throttle Bore (in)		Primary - 1.38; Secondary - 2.20
Choke Control		Automatic
Connecting Rods		
Material		Drop-forged steel
Length (in)		5.70
Bearings		Steel-backed aluminum w/overplate
Crankcase Ventilation		Closed positive
Crankshaft		
Material		Cast nodular iron
Number of Counterweights		2
Main Journal dia (in)		2.49
Crankpin Journal dia (in)		2.00
Torsional Damper		Inertia; rubber mounted
Bearings		Upper and Lower - premium aluminum
Distributor		High Energy Unit, Delco-Remy
Fuel Filter		
Carburetor		Pleated fiber element
Fuel Tank		Plastic strainer
Lubrication System		Controlled full pressure
Main Bearings		Direct pressure
Camshaft Bearings		Direct pressure
Timing Gear		Centrifugally sprayed
Connecting Rods		Direct pressure
Valve Mechanism		Pressure & gravity
Cylinder Walls		Cross sprayed throw-off from rod bearing
Piston Pins		Cross sprayed throw-off from rod bearing
Oil Capacity (qts)		
With filter change		4
W/o filter change		3.5

2.8 LITER (173 Cu. In.) V6

SPECIFICATIONS

	2.8 Liter/173 2-bbl.V6
Oil Filter	Throwaway
Capacity (qts)	43
Oil Pump	
Type	Spur gear; distributor shaft driven
Capacity (gpm)	
Normal Pressure (psi)	
Pistons	
Material	Cast aluminum alloy
Skirt	Closed
Head	Flat
Piston Pins	
Type	Rod shrink fit to pin
Material	Chromium steel
Piston Rings	
Compression Rings	
Number	2
Type	Upper — barrel; lower — inside bevel
Material	Cast iron alloy
Oil Control Ring	Spacer-expander with upper and lower rails
Number	1
Type	Multi-piece
Material	Steel
Thermostat	Harrison; 195°
Valve Train	
Type	Individually mounted rocker arms, push rod actuated
Lifters	Hydraulic
Rocker Arm Ratio	1.50:1
Valve Guides	Integral with cylinder head
Valve Lash	Zero
Intake Valves	
Material	Alloy steel
Diameter (in.)	1.60
Face Coatings	None
Seats	Machined in cylinder head
Exhaust Valves	
Material	High alloy steel
Diameter (in.)	1.31
Face Coating	None
Seats	Machined in cyl. head; induction hardened
Rotators (exhaust)	Yes
Water Pump	
Type	Centrifugal
Capacity (gpm)	

4.3 LITER (262 EFI) V6

(Ordering Code LB4)

Applications

Standard: El Camino/Caballero
Optional: None

Basic Specifications

Engine type Valve-in-head
Piston displacement (Liter/Cu. In.) 4.3/262
Bore & stroke (nominal) 4.0" x 3.48"
Compression ratio 9.3:1
Fuel delivery EFI
Exhaust Single

Test Procedures

These curves represent full-throttle performance as obtained from a dynamometer test simulating actual operating conditions when the engine is in the vehicle, with ratings corrected to barometric pressure of 29.32" mercury and 77°F dry air.

Engine Ratings

SAE net horsepower (77°F) 130 @ 3600 rpm
SAE net torque, lb-ft (77°F) 210 @ 2000 rpm

4.3 LITER (262 Cu. In.) V6 ENGINE

SPECIFICATIONS

		El Camino/Caballero
		4.3 Liter/262 V6 EFI
Basic Description		V6; Valve in head
Displacement (Liter/Cu. In.)		4.3/262
Bore & Stroke		4.0 x 3.48
Compression Ratio		9.3:1
Firing Order		1-2-3-4-5-6
SAE Net Horsepower @ rpm		130 @ 3600
SAE Net Torque (lb-ft) @ rpm		210 @ 2000
Air Cleaner		Thermostatically controlled; oil-wetted paper element
Camshaft		
Bearings		Cast alloy iron
Intake Valve	Opens	22° BTC
(excluding ramps)	Closes	238° ATC
Exhaust Valve	Opens	248° BTC
(excluding ramps)	Closes	32° ATC
Intake Duration w/o ramp		260°
Exhaust Duration w/o ramp		280°
Carburetor		
Type		Throttle Body Injection
Make		Rochester
Venturi ID (in)		N.A.
Throttle Bore (in)		N.A.
Choke Control		None
Connecting Rods		
Material		Drop-forged steel
Length (in)		5.70
Bearings		Premium aluminum or copper lead alloy
Crankcase Ventilation		Closed positive
Crankshaft		
Material		Cast nodular iron
Number of Counterweights		12
Main journal dia (in)		2.45
Crankpin journal dia (in)		2.249-2.250
Torsional Damper		Inertia; hysteresis
Bearings		Premium aluminum
Distributor		High Energy Unit, Delco-Remy; centrifugal & vacuum advance
Fuel Filter		
Carburetor		Replaceable, pleated fiber element
Fuel Tank		Plastic mesh screen
Lubrication System		Full pressure
Main Bearings		Direct pressure
Camshaft Bearings		Direct pressure
Timing Gear		Sprayed by nozzle
Connecting Rods		Direct pressure
Valve Mechanism		Pressure & gravity
Cylinder Walls		Cross sprayed by pressurized jets
Piston Pins		Cross sprayed by pressurized jets
Oil Capacity (qts)		
With filter change		5
W/o filter change		4

4.3 LITER (262 Cu. In.) V6 ENGINE

SPECIFICATIONS

	El Camino/Caballero
	4.3 Liter/262 V6 EFI
Oil Filter	Full flow, throwaway
Capacity (qts)	.43
Oil Pump	
Type	Spur gear; distributor shaft driven
Capacity (gpm)	4.5 @ 2000 rpm
Normal Pressure (psi)	40-60 @ 2000 rpm
Pistons	
Material	Cast aluminum alloy
Skirt	Closed
Head	Sump with chamfer top edge
Piston Pins	
Type	Rod shrink fit to pin
Material	Chromium steel
Piston Rings	
Compression Rings	
Number	2
Type	Upper - barrel; lower - inside bevel
Material	Cast iron alloy
Oil Control Ring	
Number	1
Type	Multi-piece
Material	Steel
Thermostat	Harnson or Dole, 195°
Valve Train	
Type	Individually mounted rocker arms, push rod actuated
Lifters	Hydraulic
Rocker Arm Ratio	1.50:1
Valve Guides	Integral with cylinder head
Valve Lash	Zero
Intake Valves	
Material	Alloy steel
Diameter (in.)	1.94
Face Coatings	None
Seats	Machined in cylinder head
Exhaust Valves	
Material	High alloy steel
Diameter (in.)	1.50
Face Coating	Aluminized
Seats	Machined in cyl. head; induction hardened
Rotators (exhaust)	Yes (exhaust valves only)
Water Pump	
Type	Centrifugal
Capacity (gpm)	24.4 @ 2000 rpm

4.3 LITER (262 Cu. In.) 4-bbl V6

(Ordering Code LB1)

Applications


Standard: C10/1500-20/2500 (w/o C6P) Regular Cab
Pickup; K10/1500 Pickup; G10/1500-20/2500,
G30/3500 Chevy Van/Vandura (w/o C6P)
Optional: Astro/Safari

Basic Specifications

Engine type Valve-in-head
Piston displacement (Liter/Cu. In.) 4.3/262
Bore & stroke (nominal) 4.0" x 3.48"
Compression ratio 9.3:1
Carburetor type 4-barrel
Exhaust—Single All

Test Procedures

These curves represent full-throttle performance as obtained from a dynamometer test simulating actual operating conditions when the engine is in the vehicle, with ratings corrected to barometric pressure of 29.32" mercury and 77°F dry air.

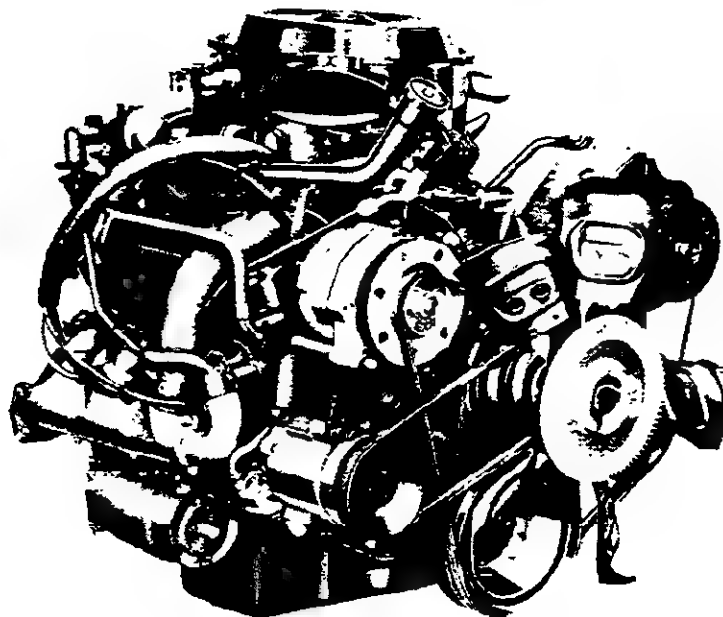

Typical Engine Shown

Engine Ratings

Light Duty Emissions

**C10/1500, C20/2500 Pickups; K10/1500
Pickups**

(8500-lb GVWR and below)

SAE net horsepower (77°F) 155 @ 4000 rpm
SAE net torque, lb-ft (77°F) 230 @ 2400 rpm


Light Duty Emissions

**Astro/Safari, G10/1500, G20/2500, G30/3500
(8500-lb GVWR and below)**

SAE net horsepower (77°F) 145 @ 4000 rpm
SAE net torque, lb-ft (77°F) 225 @ 2400 rpm

4.8 LITER (292 Cu. In.) 1-bbl SIX

(Ordering Code L25)

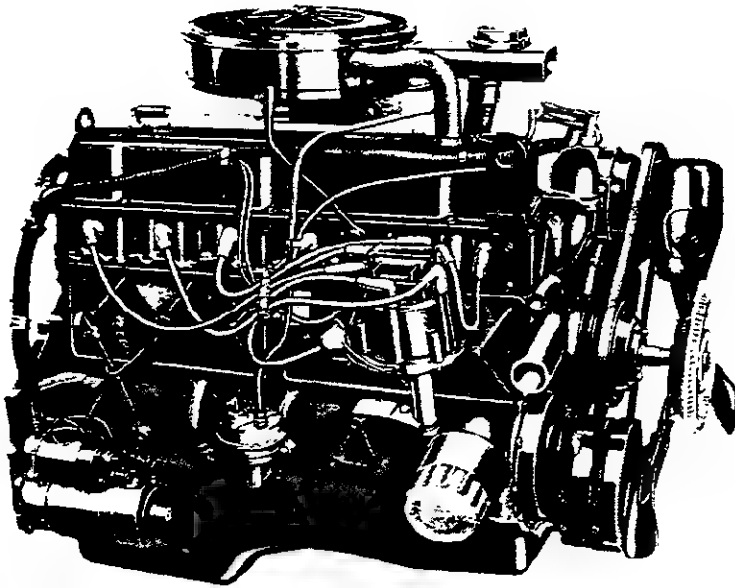

Applications

Standard: C20/2500 Pickup (43); C20/2500/C6P Pickup and C20/2500 Chassis-Cab, C30/3500; P20/2500-30/3500; K20/2500/C6P Pickup; K30/3500

Optional: None

Basic Specifications:

Engine type	Valve-in-head
Piston displacement (Liter/Cu. In.)	4.8/292
Bore & stroke (nominal)	3.88" x 4.12"
Compression ratio	7.8:1
Carburetor type	1-barrel
Exhaust—Single	All

Test Procedures


These curves represent full-throttle performance as obtained from a dynamometer test simulating actual operating conditions when the engine is in the vehicle, with ratings corrected to barometric pressure of 29.32" mercury and 77°F dry air.

Engine Ratings

All States

Heavy Duty Emissions
(8501-lb GVWR and above)

SAE net horsepower (77°F) . . . 115 @ 3600 rpm
SAE net torque, lb-ft (77°F) . . . 215 @ 1600 rpm

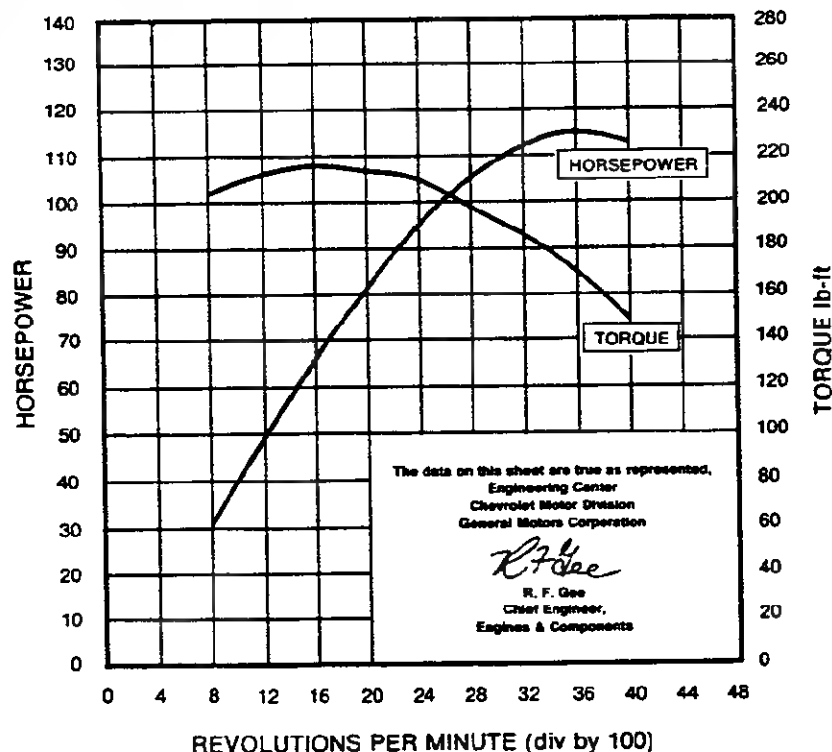

4.3 LITER 4-bbl & 4.8 LITER 1-bbl SIX ENGINES

SPECIFICATIONS

			High Torque	
			4.3 Liter/262 4-bbl	4.8 Liter/292 1-bbl
Basic Description			V6	Six-cylinder in-line; valve-in-head
Displacement (Liter/Cu. In.)			4.3/262	4.8/292
Bore & Stroke (in)			4.0 x 3.48	3.88 x 4.12
Compression Ratio			9.3:1	7.8:1
Firing Order			1-2-3-4-5-6	1-5-3-6-2-4
SAE Net Horsepower @ rpm			*155 @ 4000	†115 @ 3600
SAE Net Torque (lb-ft) @ rpm			*230 @ 2400	†215 @ 1600
Air Cleaner			Thermostatically controlled; oil wetted paper element	
Bearings			Steel-backed babbit or copper lead alloy	Aluminum
Camshaft			Cast alloy iron	
Inlet Valve (at .004" cam lift)	Opens		22° BTC	23° BTC
	Closes		238° ATC	247° ATC
Exhaust Valve (at .004" cam lift)	Opens		248° BTC	246° BTC
	Closes		32° ATC	24° ATC
Inlet Duration			260°	270°
Exhaust Duration			280°	270°
Carburetor			4-Barrel staged downdraft	1-Barrel downdraft
Type			Rochester	
Make				
Venturi ID			1.218	1.50 in.
Throttle Bore			Primary 1.38; Secondary 2.25	1.75 in.
Choke Control			Automatic	
Connecting Rods			Forged steel	
Material				
Length (in)			5.70	6.76
Bearings			Premium aluminum or copper lead alloy	Premium aluminum
Crankcase Ventilation			Closed positive	
Crankshaft			Nodular iron	
Material			I2	
Number of Counterweights				
Main Journal dia (in)			2.45	Nos. 1-7-2.2983-2.2993
Crankpin Journal dia (in)			2.249-2.250	2.099-2.100
Torsional Damper			Inertia, hysteresis	
Bearings			Premium aluminum	
Distributor			High Energy Unit, Delco-Remy; centrifugal & vacuum advance	
Fuel Filters			Replaceable, pleated fiber element	
Carburetor				
Fuel Tank			Plastic mesh screen	
Lubrication System			Full pressure	
Main Bearings			Direct pressure	
Camshaft Bearings			Direct pressure	
Timing Gear			Sprayed by nozzle	
Connecting Rods			Direct pressure	
Valve Mechanism			Pressure & gravity	
Cylinder Walls			Cross sprayed by pressurized jets	
Piston Pins			Cross sprayed by pressurized jets	

†Heavy Duty emissions.

*For Astro/Safari, Chevy Van/Vandura and Sportvan/Rally: HP - 145 @ 4000; Torque - 225 @ 2400.

4.3 LITER 4-bbl & 4.8 LITER 1-bbl SIX ENGINES

SPECIFICATIONS

	High Torque 4.3 Liter/252 4-bbl	High Torque 4.8 Liter/252 1-bbl
Oil Capacity (qts)		
With filter change	5	6
W/o filter change	4	5
Oil Filter	Full flow; throwaway type	
Capacity	.43 quart	
Oil Pump		
Type	Spur gear, distributor shaft driven	
Capacity (gpm)	4.5 to 6 @ 2000 rpm	
Normal Pressure (psi)	40 to 60 @ 2000 rpm	
Pistons		
Material	Cast aluminum alloy	
Skirt	Closed	Closed-full
Head	Sump with chamfer top edge	Sump
Piston Pins		
Type	Rod shrink fit to pin	
Material	Chromium-steel	
Piston Rings		
Compression Rings		
Number		
Type	Upper: Barrel face; Lower: inside bevel	
Material	Cast alloy iron	
Oil Control Rings		
Number	1	
Type	Multi-piece	
Material	Steel	
Thermostat	Harnson or Dole; 195°	
Valve Train		
Type	Individually mounted rocker arms, push rod actuated	
Lifters	Hydraulic	
Rocker Arm Ratio	1.50:1	1.75:1
Valve Guides	Integral with cylinder head	
Valve Lash	Zero	
Intake Valves		
Material	Alloy steel	
Head Diameter (in)	1.94	1.72
Face Coating	None	Aluminized
Seats	Machined in cylinder head	
Exhaust Valves		
Material	High alloy steel	
Head Diameter (in)	1.50	
Face Coating	Aluminized	Stellite Face
Seats	Machined in cylinder head; induction hardened	
Rotators	Yes (exhaust valves only)	
Water Pump		
Type	Centrifugal	
Capacity (gpm)	24.4 @ 2000 rpm	

5.0 LITER (305 Cu. In.) V8

(Ordering Code LG4)

Applications


Standard: None
Optional: El Camino/Caballero

Basic Specifications

Engine type	Valve-in-head
Piston displacement (Liter/Cu. In.)	5.0/305
Bore & stroke (nominal)	3.74" x 3.48"
Compression ratio	8.6:1
Carburetor type	4-barrel
Exhaust - Single	All

Test Procedures

These curves represent full-throttle performance as obtained from a dynamometer test simulating actual operating conditions when the engine is in the vehicle, with ratings corrected to barometric pressure of 29.32" mercury and 77°F dry air.

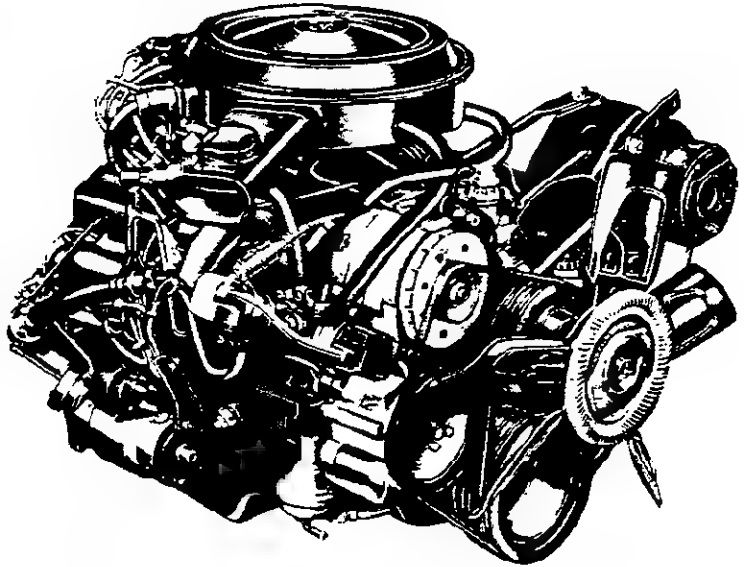

Engine Ratings

All States

SAE net horsepower (77°F)	150 @ 4000 rpm
SAE net torque, lb-ft (77°F)	240 @ 2400 rpm

5.0 LITER (305 Cu. In.) V8 WITH ESC*

(Ordering Code LE9)

Applications

Standard: C10/1500 Suburban; K10/1500 Blazer/Jimmy

Optional: C-K10/1500 Pickup; G10/1500-20/2500 Chevy Van/Vandura and Sportvan/Rally, C20/2500(03) Pickup.


*Not Available in California

Basic Specifications

Engine type Valve-in-head
Piston displacement (Liter/Cu. In.) 5.0/305
Bore & stroke (nominal) 3.74" x 3.48"
Compression ratio 9.2:1
Carburetor type 4-barrel
Exhaust—Single (Dual tail pipe) All

Test Procedures


These curves represent full-throttle performance as obtained from a dynamometer test simulating actual operating conditions when the engine is in the vehicle, with ratings corrected to barometric pressure of 29.32" mercury and 77°F dry air.

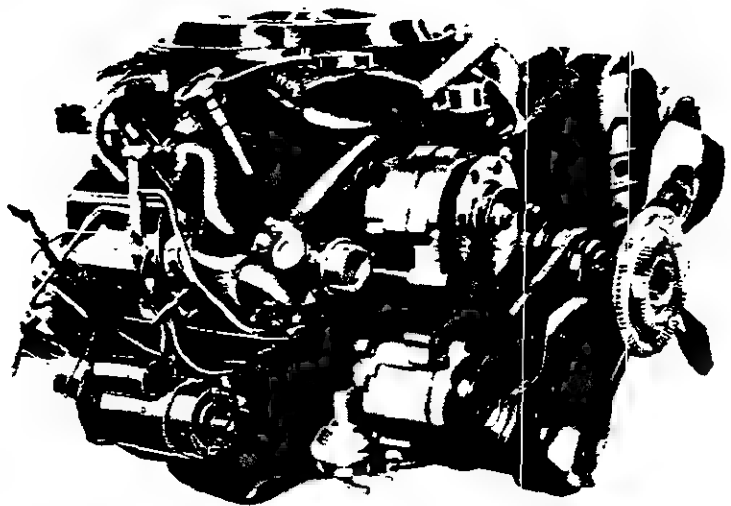

Engine Ratings All Models

Light Duty Emissions (AIR)
(8500 lbs GVWR and under)

SAE net horsepower (77°F) 160 @ 4400 rpm
SAE net torque, lb-ft (77°F) 235 @ 2000 rpm

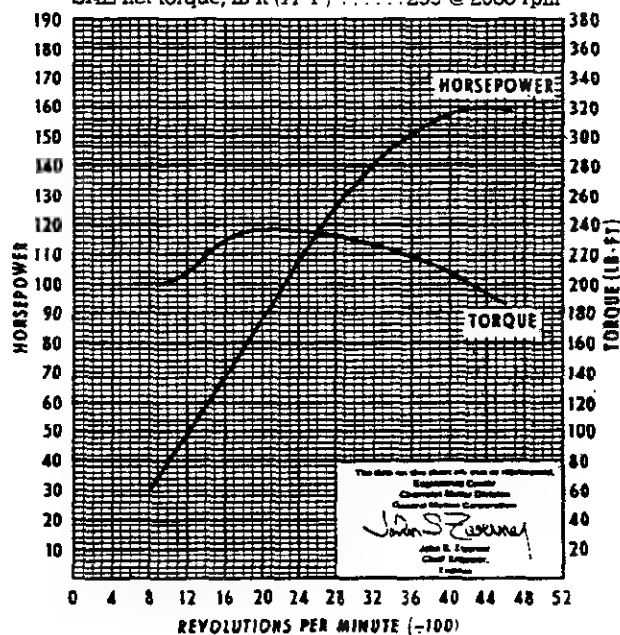

5.0 LITER (305 Cu. In.) 4-bbl V8*

(Ordering Code LF3)

Applications

Standard: None

Optional: C10/1500 Pickup; G10/1500-20/2500 Chevy
Van/Vandura


*Available in California only

Basic Specifications

Engine type Valve-in-head
Piston displacement (Liter/Cu. In.) 5.0/305
Bore & stroke (nominal) 3.74" x 3.48"
Compression ratio 8.6:1
Carburetor type 4-barrel
Exhaust—Single (Dual tail pipe) All

Test Procedures

These curves represent full-throttle performance as obtained from a dynamometer test simulating actual operating conditions when the engine is in the vehicle, with ratings corrected to barometric pressure of 29.32" mercury and 77°F dry air.

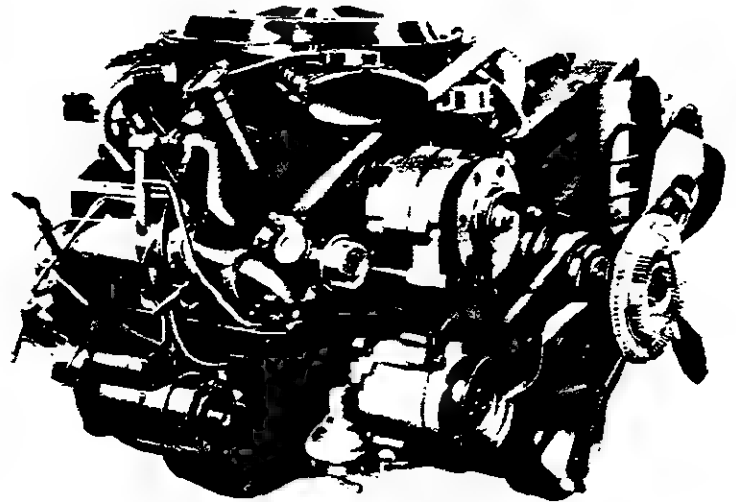


Typical Engine Shown

Engine Ratings

Light Duty Emissions (8500 lbs GVWR and under)

SAE net horsepower (77°F) 155 @ 4000 rpm

SAE net torque, lb-ft (77°F) 245 @ 1600 rpm

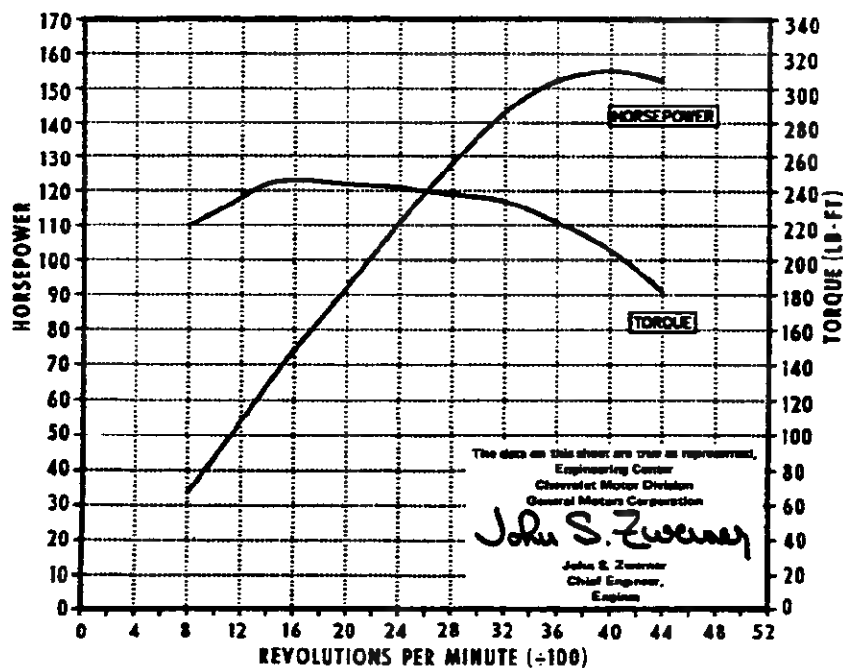

5.0 LITER (305 Cu. In.) V8 ENGINES

SPECIFICATIONS

		El Camino/Caballero	Series 10/1500-20/2500(LE9)	Series 10/1500-20/2500(LE3)
		5.0 Liter/305 4-bbl	★ 5.0 Liter/305 4-bbl	▲ 5.0 Liter/305 4-bbl
Basic Description				
Displacement (Liter/cu in)		5.0/305	5.0/305	5.0/305
Bore & Stroke		3.74 x 3.48	3.74 x 3.48	3.74 x 3.48
Compression Ratio		8.6:1	9.2:1	8.6:1
Firing Order			1-8-4-3-6-5-7-2	1-8-4-3-6-5-7-2
SAE Net Horsepower @ rpm		150 @ 4000	160 @ 4400	155 @ 4000
SAE Net Torque (lb-ft) @ rpm		240 @ 2000	235 @ 2000	245 @ 1600
Air Cleaner		Thermostatically controlled; Oil wetted paper element		
Camshaft				
Bearings		Steel-backed babbitt		
Intake Valve	Opens	44° BTC	16° BTC	
	Closes	76° ABC	228° ATC	
Exhaust Valve	Opens	78° BBC	234° BTC	
	Closes	52° ATC	25° ATC	
Intake Duration		300°	244°	
Exhaust Duration		310°	259°	
Carburetor				
Type			4-barrel	
Make			Rochester	
Venturi ID (in.)		1.093	1.218	
Throttle Bore (in.)		Pn.-1.38; Sec.-2.25	Pn.-1.38; Sec.-2.25	
Choke Control		Automatic (Electric)		
Connecting Rods				
Material		Drop-forged Steel		
Length (in)		5.695-5.705		
Bearings		Premium aluminum		
Crankcase Ventilation				
Closed positive				
Crankshaft				
Material		Cast nodular iron		
Number of Counterweights		6		
Main Journal dia (in)		2.45		
Crankpin Journal dia (in)		2.10		
Torsional Damper		Inertia; rubber mounted		
Bearings		Upper—Micro-babbitt or copper lead; Lower—premium aluminum		
Distributor				
High Energy Unit, Delco-Remy; centrifugal & vacuum advance				
Fuel Filter				
Carburetor		Pleated fiber element		
Fuel Tank		Plastic strainer		
Lubrication System				
Controlled full pressure				
Main Bearings		Direct pressure		
Camshaft Bearings		Direct pressure		
Timing Gear		Centrifugally sprayed		
Connecting Rods		Direct pressure		
Valve Mechanism		Pressure & gravity		
Cylinder Walls		Cross sprayed throw-off from rod bearing		
Piston Pins		Cross sprayed throw-off from rod bearing		
Oil Capacity (qts)				
With filter change		4.625	5	
W/o filter change		4		

★ Not available in California ▲ Available in California only

5.0 LITER (305 Cu. In.) V8 ENGINES


SPECIFICATIONS

	El Camino/Caballero	Series 10/1500-20/2500 (LE9)	Series 10/1500-20/2500 (LF3)
	5.0 Liter/305 4-bbl	★5.0 Liter/305 4-bbl	▲5.0 Liter/305 4-bbl
Oil Filter		Throwaway	
Capacity (qts)	.625	.85	
Oil Pump		Spur gear; distributor shaft driven	
Type		4.3 @ 2000 rpm	
Capacity (gpm)		45 @ 2000 rpm	
Normal Pressure (psi)	50-65 @ 2000 rpm		
Pistons		Cast aluminum alloy	
Material		Closed	
Skirt		Sump	
Head			
Piston Pins		Rod shrink fit to pin	
Type		Chromium steel	
Material			
Piston Rings			
Compression Rings		2	
Number		Upper—barrel; lower—inside bevel	
Type		Cast iron alloy	
Material			
Oil Control Ring		1	
Number		Multi-piece	
Type		Steel	
Material		Harnson; 195°	
Thermostat			
Valve Train		Individually mounted rocker arms, push rod actuated	
Type		Hydraulic	
Lifters		1.50:1	
Rocker Arm Ratio		Integral with cylinder head	
Valve Guides		Zero	
Valve Lash			
Intake Valves		Alloy steel	
Material		1.84	
Diameter (in.)		None	
Face Coatings		Machined in cylinder head	
Seats			
Exhaust Valves		High alloy steel	
Material		1.50	
Diameter (in.)		Aluminized	
Face Coating		Machined in cyl. head; induction hardened	
Seats		Yes	
Rotators (exhaust)			
Water Pump		Centrifugal	
Type		21.6 @ 2000 rpm	
Capacity (gpm)			

★Not available in California
▲Available in California only

5.7 LITER (350 Cu. In.) 4-bbl V8

(Ordering Code LS9)

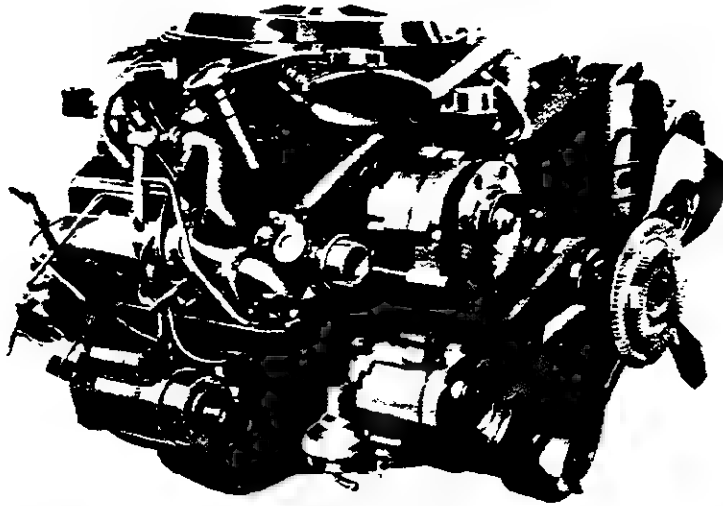

Typical Engine Shown

Applications

Standard: K10/1500 Suburban, K20/2500* Pickup;
G30/3500 Sportvan/Rally
Optional: C10/1500 Suburban; G10/1500-20/2500
Sportvan/Rally; C20/2500(03)* Pickup
(California only).

*Without C6P Heavy-Duty Chassis

Basic Specifications

Engine type	Valve-in-head
Piston displacement (Liter/Cu. In.)	5.7/350
Bore & stroke (nominal)	4.00" x 3.48"
Compression ratio	8.2:1
Carburetor type	4-barrel
Exhaust—Single with dual tail pipe	All


Test Procedures

These curves represent full-throttle performance as obtained from a dynamometer test simulating actual operating conditions when the engine is in the vehicle, with ratings corrected to barometric pressure of 29.32" mercury and 77°F dry air.

Engine Ratings


All States
Light Duty Emissions
(8500-lb GVWR and below)

SAE net horsepower (77°F) 165 @ 3800 rpm
SAE net torque, lb-ft (77°F) 275 @ 1600 rpm

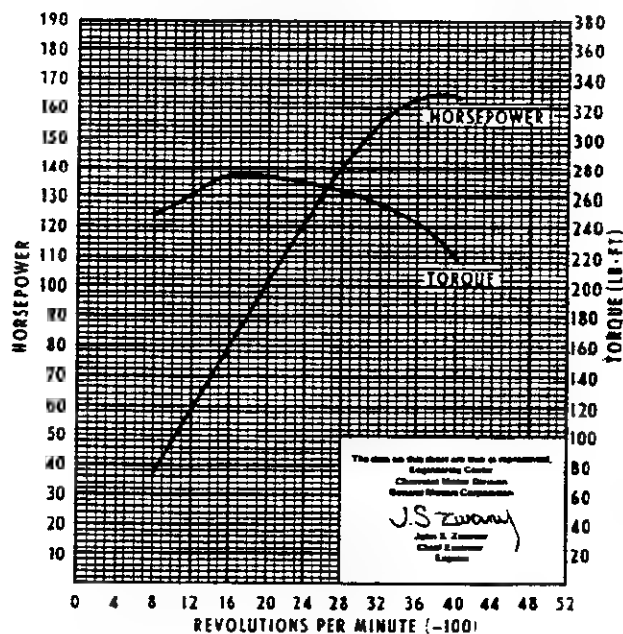

5.7 LITER (350 Cu. In.) 4-bbl V8

(Ordering Code LT9)

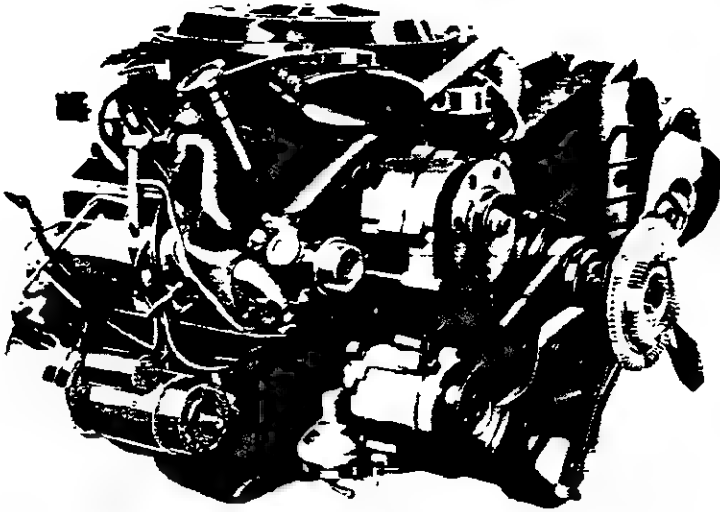

Typical Engine Shown

Applications

Standard: C20/2500 Suburban; K20/2500 Suburban; G30/3500 Vans (except G30/3500-05/06 w/o C6P)

Optional: C20/2500 Pickup and Chassis-Cab (03* 43); K20/2500 Pickup*; C-K30/3500 Pickup and Chassis-Cab (03, 43,); G30/3500-05/06 w/C6P; P20/2500-30/3500 models (except Motor Home Chassis)

*With C6P Heavy Duty Chassis

Basic Specifications

Engine type Valve-in-head
Piston displacement (Liter/Cu. In.) 5.7/350
Bore & stroke (nominal) 4.00" x 3.48"
Compression ratio 8.3:1
Carburetor type 4-barrel
Exhaust—Single All

Test Procedures

These curves represent full-throttle performance as obtained from a dynamometer test simulating actual operating conditions when the engine is in the vehicle, with ratings corrected to barometric pressure of 29.32" mercury and 77°F dry air.



Engine Ratings

All States except California (8501 lbs GVWR and above)

SAE net horsepower (77°F) . . . 160 @ 3800 rpm
SAE net torque, lb-ft (77°F) . . . 250 @ 2800 rpm

California Only (8501 lbs GVWR and above)

SAE net horsepower (77°F) . . . 155 @ 4000 rpm
SAE net torque, lb-ft (77°F) . . . 240 @ 2800 rpm

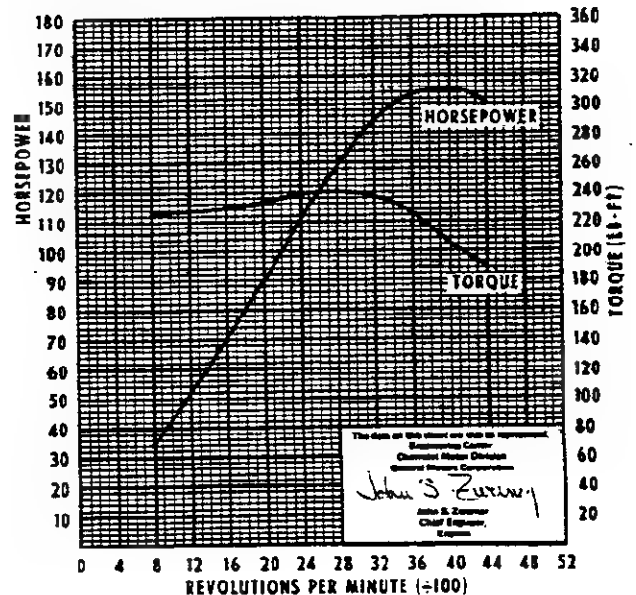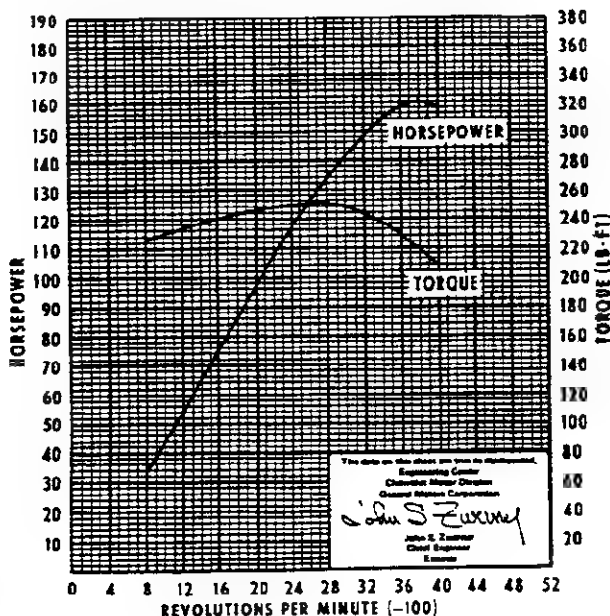

5.7 LITER (350 Cu. In.) V8 ENGINES

SPECIFICATIONS

		Series 10/1500-30/3500 (LS9)		Series 10/1500-30/3500 (IT9)	
		5.7 Liter/350 4-bbl		5.7 Liter/350 4-bbl	
Basic Description		V8; valve-in-head			
Displacement (Liter/cu in)		5.7/350		5.7/350	
Bore & Stroke		4.00 x 3.48		4.00 x 3.48	
Compression Ratio		8.2:1		8.3:1	
Firing Order		1-8-4-3-6-5-7-2			
SAE Net Horsepower @ rpm		165 @ 3800		†160 @ 3800	
SAE Net Torque (lb-ft) @ rpm		275 @ 1600		†250 @ 2300	
Air Cleaner		Thermostatically controlled; oil wetted paper element			
Camshaft					
Bearings		Steel-backed babbitt			
Intake Valve (at .004" cam lift)	Opens	14° BTC			
	Closes	244° ATC			
Exhaust Valve (at .004" cam lift)	Opens	243° BTC			
	Closes	26° ATC			
Intake Duration		258°			
Exhaust Duration		269°			
Carburetor					
Type		4 barrel			
Make		Rochester			
Venturi ID (in)		1.218			
Throttle Bore (in)		Pr.-1.38; Sec. 2.25			
Choke Control		Automatic (Electric)			
Connecting Rods					
Material		Drop-forged Steel			
Length (in)		5.695-5.705			
Bearings		Premium aluminum			
Crankcase Ventilation		Closed positive			
Crankshaft					
Material		Cast nodular iron			
Number of Counterweights		6			
Main Journal dia (in)		2.45			
Crankpin Journal dia (in)		2.10			
Torsional Damper		Inertia; rubber mounted			
Bearings		Upper—Micro-babbitt or copper lead; Lower—premium aluminum			
Distributor		High Energy Unit, Delco-Remy; centrifugal & vacuum advance			
Fuel Filter					
Carburetor		Pleated fiber element			
Fuel Tank		Plastic strainer			
Lubrication System		Controlled full pressure			
Main Bearings		Direct pressure			
Camshaft Bearings		Direct pressure			
Timing Gear		Centrifugally sprayed			
Connecting Rods		Direct pressure			
Valve Mechanism		Pressure & gravity			
Cylinder Walls		Cross sprayed throw-off from rod bearing			
Piston Pins		Cross sprayed throw-off from rod bearing			
Oil Capacity (qts)					
With filter change		5			
W/o filter change		4			

†The following ratings apply to California only: SAE Net Horsepower . . . 155 @ 4000 rpm
SAE Net Torque (lb.-ft.) . . . 240 @ 2800 rpm

5.7 LITER (350 Cu. In.) V8 ENGINES

SPECIFICATIONS


	Series 10/1500-30/3500 (LS9 and LT9)
	5.7 Liter/350 4-bbl
Oil Filter	Throwaway
Capacity (qts)	.85
Oil Pump	
Type	Spur gear; distributor shaft driven
Capacity (gpm)	4.3 @ 2000 rpm
Normal Pressure (psi)	45 @ 2000 rpm
Pistons	
Material	Cast aluminum alloy
Skirt	Closed
Head	Sump*
Piston Pins	
Type	Rod shrink fit to pin
Material	Chromium steel
Piston Rings	
Compression Rings	
Number	2
Type	Upper—barrel; lower—inside bevel
Material	Cast iron alloy
Oil Control Ring	
Number	1
Type	Multi-piece
Material	Steel
Thermostat	Harnson; 195°
Valve Train	
Type	Individually mounted rocker arms, push rod actuated
Lifters	Hydraulic
Rocker Arm Ratio	1.50:1
Valve Guides	Integral with cylinder head
Valve Lash	Zero
Intake Valves	
Material	Alloy steel
Diameter (in.)	1.94 LS9, 1.72 LT9
Face Coatings	None on LS9; aluminized on LT9
Seats	Machined in cylinder head
Exhaust Valves	
Material	High alloy steel
Diameter (in.)	1.50
Face Coating	Aluminized
Seats	Machined in cyl. head; induction hardened
Rotators (exhaust)	Yes
Water Pump	
Type	Centrifugal
Capacity (gpm)	21.6 @ 2000 rpm

*Chamfered top land on light duty emissions



ENGINE & COOLING

6.2 DIESEL ENGINE FEATURES

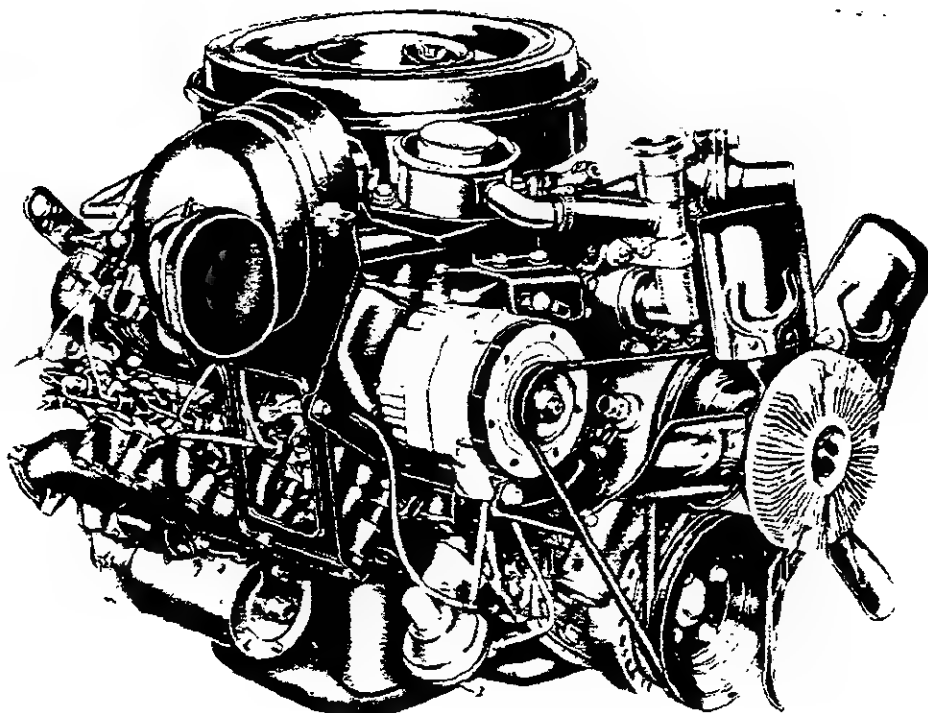

A 90° 4-cycle V8 diesel engine standard on full-size Pickups, Suburbans, Chassis-Cab, Blazer/Jimmy, Chevy Van/Vandura, Sportvan/Rally, Cutaway Van, Hi-Cube Van, FC/Step-Van/Value Van and Motor Home Chassis Diesel models. It's no secret that more and more truck owners are going diesel—a practical alternative to gas engines. That's why we're offering the 6.2 Liter Diesel for full-size Pickups, Suburbans, Chassis-Cab, Blazer/Jimmy, Chevy Van/Vandura, Sportvan/Rally, Cutaway Van, Hi-Cube Van, FC/Step-Van/Value Van diesel models. This totally new powerplant is a satisfying combination of power and common sense—6.2 liters of tough-towing, big-hauling, hardworking, fuel-sipping power. **The right power and the right mileage—right now!** This made-in-America V8 engine, designed and manufactured specifically for trucks, has the traditional fuel-economy advantages of diesel over gasoline. And extensive testing also indicates that the 6.2 Liter Diesel can handle heavy loads and stop-and-go traffic. It also offers some of the best mileage estimates ever in full-size GM light-duty trucks. Simply put, this new V8 presents a powerful case why you should go diesel. **Trailer towing muscle.** Torque, or low-end power, is an important feature on any truck. But the 6.2 Liter


Diesel really delivers here. It's rated at 240 lb.-ft. at 2000 RPM—that means it'll dig in and pull hard fully loaded. It also means it'll tow a heap of trailer. When properly equipped, a full-size '84 Diesel Pickup or Suburban can move as much as 13,500 lbs., which includes itself, trailer, passengers, cargo and equipment.

Rugged diesel construction throughout. The 6.2 Liter Diesel is built to take a lot. It features thick cylinder walls, a forged steel camshaft, a nodular iron crankshaft (nodular iron is gray cast-iron with a magnesium alloy), five head bolts around each cylinder, and four-bolt main bearing caps which help provide rigid support for the crankshaft and reduce stresses.

Why you should go diesel. It's simple. If you plan to put a lot of miles on your truck and/or high idle operations and if you're at all concerned about fuel prices, you should consider going diesel. In addition, diesel offers you high torque power for hauling. And diesels have a well-earned reputation in applications ranging from locomotives to ocean tankers. And here's the clincher: low maintenance costs. There are no spark plugs, distributor or ignition wiring. So you don't have these to maintain. Just about any way you look at it, diesels can be a big plus for most truck applications.

ENGINE & COOLING

6.2 DIESEL ENGINE FEATURES

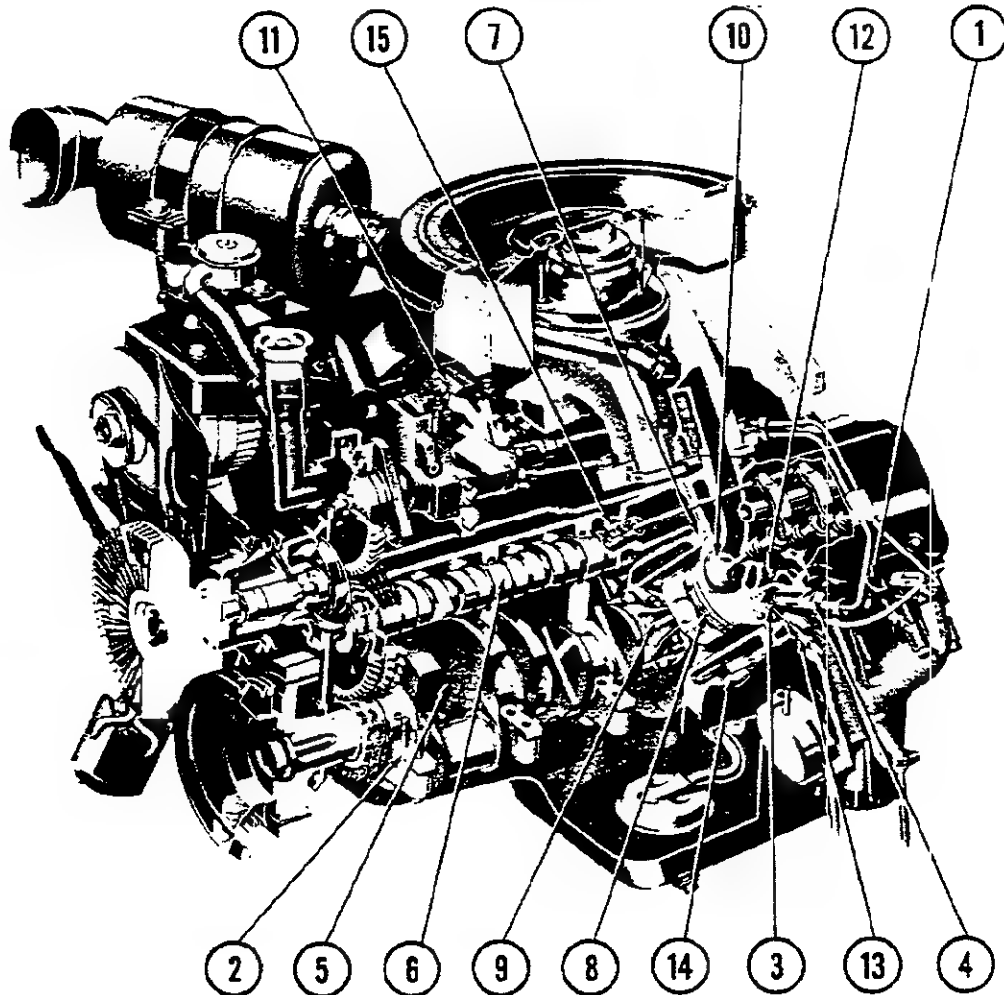

1. Seventeen-bolt head design for a tight gasket seal all around. Locates five bolts around each cylinder bore.
2. Four-bolt main bearing caps provide rigid support for the crankshaft.
3. Ricardo Comet V precombustion chambers for high efficiency and low noise levels.
4. Pintle-type fuel injector nozzles with fuel lines made of high-pressure steel tubing.
5. Nodular iron crankshaft with external torsional damper.
6. Forged steel carburized camshaft for strength and durability.
7. Cast alloyed gray iron cylinder block for overall strength. Cylinder walls are reborable.
8. Cast aluminum pistons combine strength and light weight.
9. Forged heat-treated steel connecting rods for strength and rigidity.
10. Silchrome® steel intake valves with full-chrome stems for durability.
11. Stanadyne® mechanical distributor fuel system includes a full mechanical governor with friction damper ring. Corrosion-resistant springs and check springs.
12. Stellite-faced exhaust valves with full-chrome stems and positive valve rotators.
13. Glow plug starting system preheats the pre combustion chambers for fast cold-engine starts.
14. Engine block heater for fast starts in cold weather.
15. Roller hydraulic lifters help provide precise operation of valve train components.

ENGINE & COOLING

6.2 DIESEL ENGINE FEATURES

Here's why diesel engines work so efficiently.

There are three major reasons why diesel engines are generally more economical than comparably sized gasoline engines: air/fuel ratio, compression ratio, and price of fuel.

Diesels have significantly higher air/fuel ratios than comparable gasoline engines—which means that diesels burn proportionately less fuel.

A diesel's air/fuel ratio is about 80-to-1 at idle and 20-to-1 at full load. Compare this to gas engines, which use about a 14-to-1 mixture of air and fuel at idle, and a 12-to-1 mixture at full load.

Diesel engines depend on compression for ignition of fuel, whereas the gas engine depends on spark plugs. The diesel, with its higher compression ratio, more efficiently converts fuel-heat energy into mechanical energy. That energy provides the diesel with its traditionally high torque power for hauling.

Thanks to functional differences like these, you can get more miles per gallon with a diesel engine than with a comparably sized gasoline engine. What's more, you do it with traditionally lower-priced fuel. Another diesel plus: no conventional gas engine tune-ups—or spark plugs, distributor or ignition wiring to maintain.

The 6.2 Liter Diesel. Built in one of the world's newest engine plants. GM's Moraine engine assembly plant in Ohio is an impressive sight. It is a totally redesigned plant with the latest modern technology working to produce a rugged, high-efficiency powerplant.

Quality is the byword here. You can see it in the extensive quality checks, and in the intensive testing procedures regularly performed during and after assembly. For instance, all parts are air-pressure leak tested to check for quality fits; TV monitors are used to check whether all valve lifters are in place. And each new diesel is thoroughly computer-checked after assembly. Some engines are randomly tested in a laboratory: they're run at various throttle positions for

numerous checks and testing.


A sophisticated computer network. This diesel plant uses more programmable controllers than any other manufacturing plant in the U.S.—400. These terminals help run the machines and make automatic tool compensations. Another important feature is the central "host" computer which efficiently oversees and monitors the subordinate controllers.

The emphasis is on quality. An engine is only as good as the people who build it. That's why all employees are required to take 80 rigorous hours of classroom training—hands-on experience with the engine—to give them the total picture. But it doesn't stop there. Each employee is responsible for the quality of his work. The object at all times is to build it right the first time.

Special 6.2 Liter Diesel Highlights. □ This diesel engine is designed specifically for truck use. □ The 6.2 Liter Diesel uses nodular iron on its bearing caps—a significantly stronger design than those without nodular iron. □ The camshaft is made of forged steel and is carburized to give it strength. □ The fuel pump is a Roosa Master®—a brand used worldwide on many diesels, including tractors. □ A highly proven Ricardo Comet precombustion chamber with its swirl-type design provides efficient fuel burn and impressive emissions control characteristics. □ The 6.2 Liter Diesel is equipped with a standard oil cooler. □ A block heater and glow plugs are standard to aid cold-weather starts. At 0°F. the glow plugs can preheat the prechambers in about 6 seconds. □ There is extensive moisture-in-fuel protection, including (1) an integral two-stage fuel filter, a fuel/water separator with instrument panel warning light (2) an electric fuel heater, and (3) a fuel filter change signal. □ The higher compression ratios of diesels demand quality dimensions in design and production. The 6.2 Liter Diesel is a very close-tolerance engine. Most of the critical dimensions are controlled to within two-thousandths of an inch. That's about half the thickness of this piece of paper!

ENGINE & COOLING

6.2 DIESEL ENGINE FEATURES

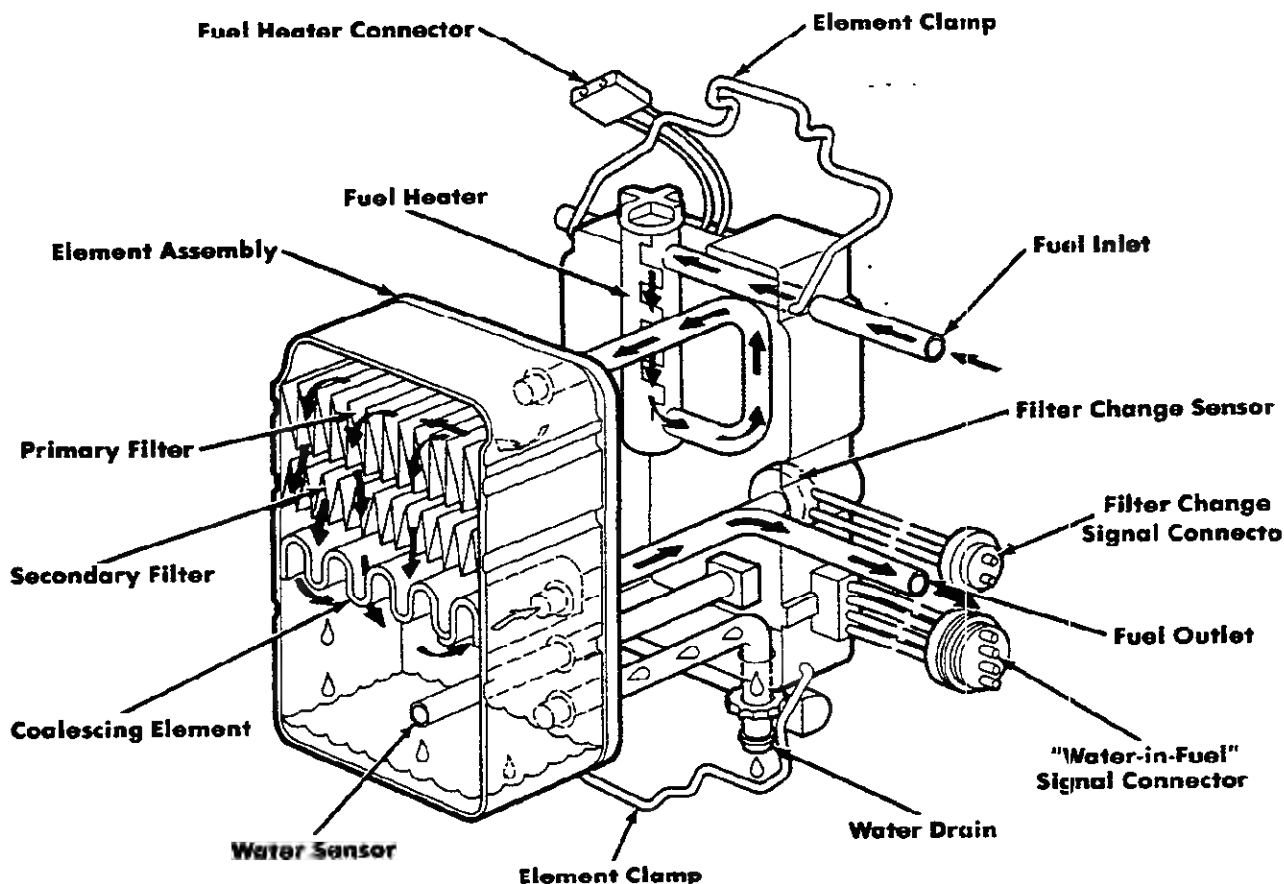

Single Unit Water/Fuel Separator, Two-Stage Fuel Filter, Fuel Heater. Mounted either to the engine or the engine compartment fire wall, depending on model, this compact modular unit consists of two main components—a permanently mounted aluminum base with integral element holding clamps and a rectangular metal element. The metal element contains two stages of fuel filter media and a third stage of coalescing material to effect water separation. The lower section of the element contains a water collection area with a capacity of approximately 260cc. The water sensor signal level is set at 50cc. to provide an early alert of water ingress.

Fuel enters at top right hand inlet (see flow schematic above) and flows into heating chamber. Heater is activated at 8°C. (46°F) and below. Heated fuel enters element at top and flows down through the two stage fuel filter media pack. While passing through the third stage, water coalesces out and drops to a sump holding area. Clean fuel returns to the base and exits to the fuel injection pump. An electrical signal is obtained from the filter change sensor located in the return path. A water drain petcock on the base allows collected water to be drained from the unit when necessary. An air

vent valve is located on top of the filter base to purge air out when a new filter assembly is installed.

Engine Oil

- Engine oil requirement is grade SF/CD or SF/CC
- Oil change interval for normal service is ever 5000 miles
- In severe service, a 2500-mile oil change interval is recommended
- Always replace oil filter element each time engine oil is changed

Starting Procedure (when engine is warm)

- Same as gasoline engine.

Starting Procedure (when engine is cold)

- Turn the ignition switch to the "on" position
- "Glow Plugs" light comes on
- Wait for glow plugs to heat the combustion chamber
- When the "Glow Plugs" light goes off, turn ignition key to start engine.

Cold Weather Starting


- When outside temperatures drop below 0°F (−18°C) use the engine block heater.

Starting Aids

- In cold weather, do not under any circumstance use ether or other chemical starting assists.

6.2 LITER (379 Cu. In.) V8 DIESEL

(Ordering Code LH6)

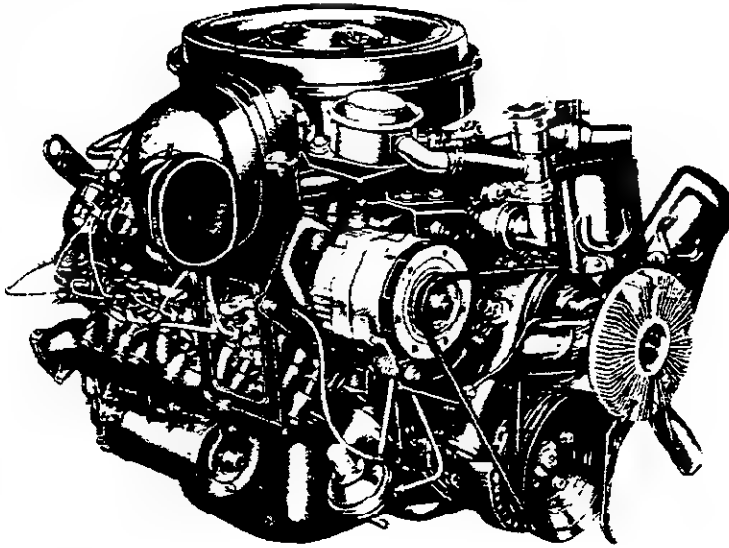

Applications

Standard: C-K10/1500; C-K20/2500 Regular Cab
Pickup (w/o C6P); G20/2500 Diesel Models
Optional: None

Basic Specifications

Engine type Valve-in-head
Piston displacement (Liter/Cu. In.) 6.2/379
Bore & stroke (nominal) 3.98" x 3.82"
Compression ratio 21.3:1
Exhaust Dual


Test Procedures

These curves represent full-throttle performance as obtained from a dynamometer test simulating actual operating conditions when the engine is in the vehicle, with ratings corrected to barometric pressure of 29.32" mercury and 77°F dry air.

Engine Ratings


All States

SAE net horsepower (77°F) 130 @ 3600 rpm
SAE net torque, lb-ft (77°F) 240 @ 2000 rpm

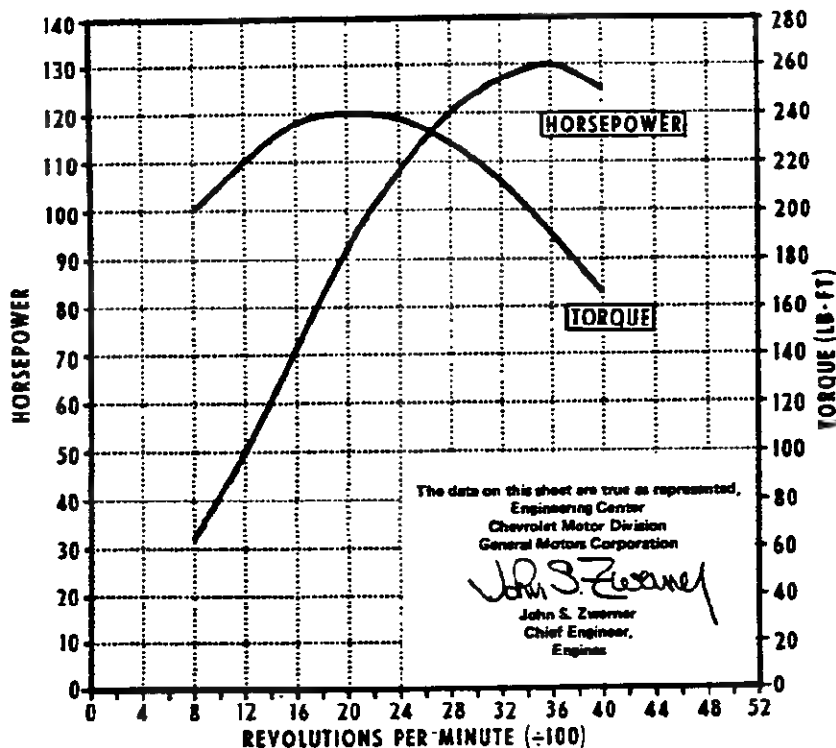

6.2 LITER (379 Cu. In.) V8 DIESEL

(Ordering Code 1L4)

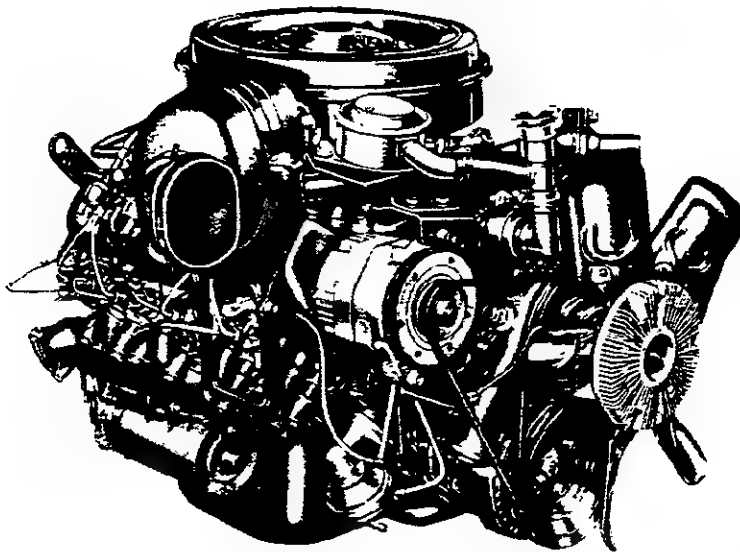

Applications

Standard: C-K20/2500 Regular Cab Pickup
(w/C6P); C-K 20/2500 Bonus/Crew Cab
Pickup; P20/2500, C-K-G-P30/3500
(except P31832) Diesel Models
Optional: None

Basic Specifications

Engine type Valve-in-head
Piston displacement (Liter/Cu. In.) 6.2/37
Bore & stroke (nominal) 3.98" x 3.82
Compression ratio 21.3:
Exhaust Du.

Test Procedures

These curves represent full throttle performance as obtained from a dynamometer test simulating actual operating conditions when the engine is in the vehicle, with ratings corrected to barometric pressure of 29.32" mercury and 77°F dry air.

Engine Ratings

C, K, P Models



All States

SAE net horsepower (77°F) . . . 148 @ 3600 rpm
SAE net torque, lb-ft (77°F) . . . 246 @ 2000 rpm

G Models

All States

SAE net horsepower (77°F) . . . 145 @ 3600 rpm
SAE net torque, lb-ft (77°F) . . . 248 @ 2000 rpm

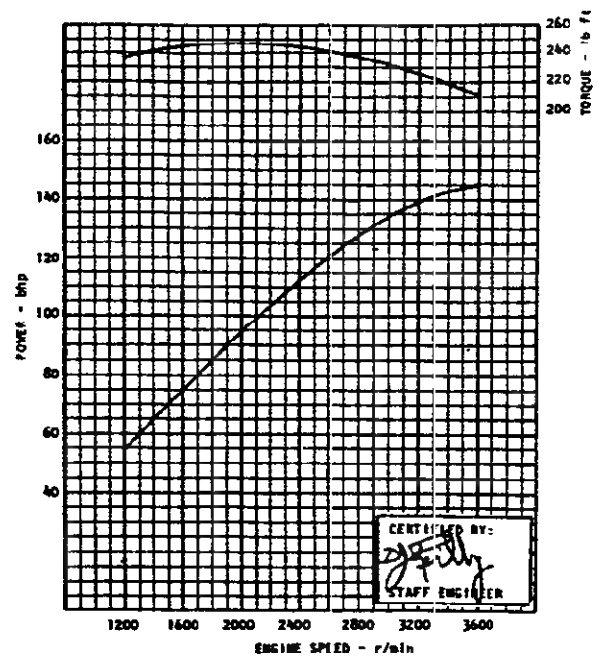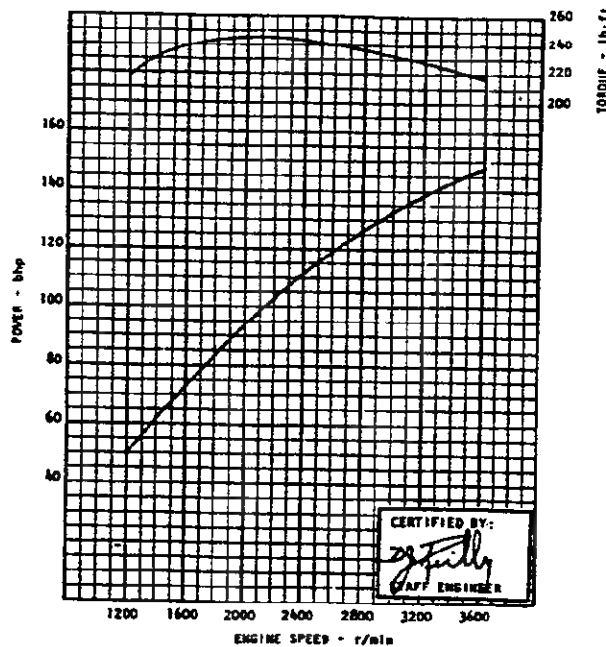

6.2 LITER (379 Cu. In.) V8 DIESEL

SPECIFICATIONS

		6.2 Liter/379 V8
Basic Description		Fuel Injection
Displacement (Liter/Cu. In.)		V8, valve-in-head
Bore & Stroke (in)		6.2/379
Compression Ratio		3.98 x 3.82
Firing Order		21.3:1
SAE Net Horsepower @ rpm		1-8-7-2-6-5-4-3
SAE Net Torque (lb-ft) @ rpm		+130 @ 3600
		+240 @ 2000
Air Cleaner		Oil wetted paper element
Camshaft		
Bearings		Steel-backed Aluminum
Intake Valve (at .004" cam lift)	Opens	13° BTC
	Closes	224° ATC
Exhaust Valve (at .004" cam lift)	Opens	248° BTC
	Closes	25° ATC
Intake Duration		237°
Exhaust Duration		273°
Fuel System		
Lift Pump Type		Mechanical diaphragm - camshaft drive
Fuel Shut-off		Electric solenoid
Injector Type		Stanadyne - multiple orifice
Size and Spray Pattern		.017-30°
Actuation		Automatic
Injection Pressure		1800 psi
Connecting Rods		
Material		Drop forged steel
Length (in)		6.2783-6.2803
Bearings		Premium aluminum
Crankcase Ventilation		Closed positive
Crankshaft		
Material		Cast nodular iron
Number of Counterweights		6
Main Journals (in)		2.95
Crankpin Journals (in)		2.40
Torsional Damper		Inertia; rubber mounted
Bearings		Premium aluminum
Fuel Filter		
Injector		Felt type element (Primary) Pleated fiber element (Secondary)
Fuel Tank		Mesh strainer
Lubrication System		Controlled full pressure
Main Bearings		Direct pressure
Camshaft Bearings		Direct pressure
Timing Gear		Spray
Connecting Rods		Direct pressure
Valve Mechanism		Pressure & gravity
Cylinder Walls		Spray
Piston Pins		Spray

†LD Emission ratings shown; HD Emissions are: C,K,P models: HP-148 @ 3600
Torque-246 @ 2000
G models: HP-145 @ 3600
Torque-248 @ 2000

6.2 LITER (379 Cu. In.) V8 DIESEL

SPECIFICATIONS

	6.2 Liter/379 V8
	Fuel Injection
Oil Capacity	
With filter change	7
Oil Filter	
Standard	Full flow; throwaway type
Capacity (qts)	0.85
Oil Pump	
Type	Spur gear; shaft driven
Capacity (gpm)	5 @ 2000 rpm
Normal Pressure (psi)	35 psi minimum @ 1500-3000 rpm
Pistons	
Material	Cast aluminum alloy with top ring insert
Skirt	Slipper type
Head	Flat with cast swirl sump
Piston Pins	
Type	Floating pin
Material	Chromium steel
Piston Rings	
Compression Rings	
Number	2
Type	Upper—Keystone type with barrel molybdenum face, lower—tapered face
Material	Cast alloy iron
Oil Control Rings	
Number	1
Type	Multi-piece
Material	Steel
Thermostat	Robertshaw; 190°
Valve Train	
Type	Shaft mounted rocker arms, push rod actuated
Lifters	Hydraulic with roller follower
Rocker Arm Ratio	1.50:1
Valve Guides	Cast alloy iron; integral with head
Valve Lash	Zero
Intake Valve	
Material	Alloy steel
Head Diameter (in)	1.97
Face Coating	None
Seats	Machined in cylinder head; induction hardened
Exhaust Valves	
Material	Alloy steel
Head Diameter (in)	1.65
Face Coating	Stellite
Seats	Machined in cylinder head; induction hardened
Rotators	Exhaust
Water Pump	
Type	Centrifugal
Capacity (gpm)	35 @ 2000 rpm

7.4 LITER (454 Cu. In.) 4-bbl V8

(Ordering Code LE8)

Applications


Standard: P30/3500 Motor Home Chassis
Optional: C20/2500; C-K30/3500 Pickups and
Chassis-Cabs

Basic Specifications

Engine type	Valve-in-head
Piston displacement (Liter/Cu. In.)	7 4/454
Bore & stroke (nominal)	4.25" x 4.00"
Compression ratio	7.9:1
Carburetor type	4-barrel
Exhaust—Dual	All

Test Procedures


These curves represent full-throttle performance as obtained from a dynamometer test simulating actual operating conditions when the engine is in the vehicle, with ratings corrected to barometric pressure of 29.32" mercury and 77°F dry air.

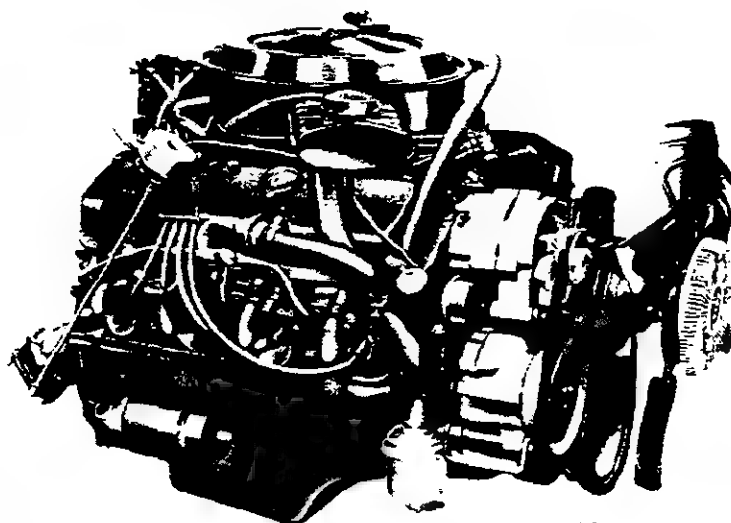

Engine Ratings

All States
Heavy Duty Emissions
(8501 lbs GVWR and above)

SAE net horsepower (77°F)	230 @ 3800 rpm
SAE net torque, lb-ft (77°F)	360 @ 2800 rpm

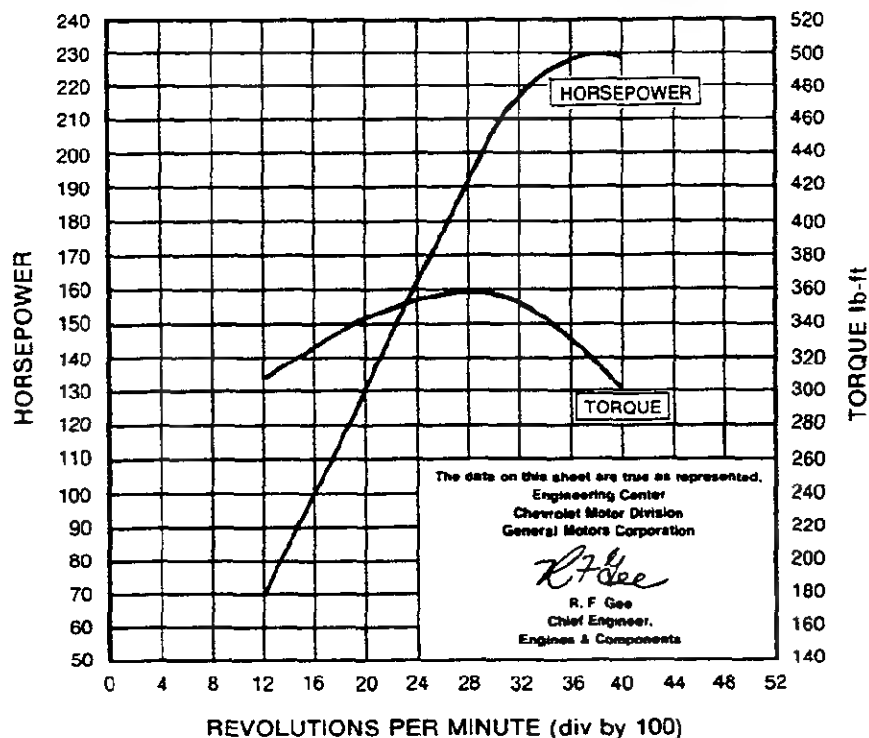

NOTES

7.4 LITER (454 Cu. In.) V8 ENGINES

SPECIFICATIONS

	HIGH TORQUE	
	7.4 Liter/454 4-bbl	
Basic Description	V8; valve-in-head	
Displacement (Liter/cu in.)	7.4/454	
Bore & Stroke (in)	4.251 x 4.00	
Compression Ratio	29:1 <i>cc. of cyl head 118.06</i>	
Firing Order	1-8-4-3-6-5-7-2 <i>± 1.</i>	
SAE Net Horsepower @ rpm	230 @ 3800	
SAE Net Torque (lb ft) @ rpm	360 @ 2800	
Air Cleaner	Thermostatically controlled; oil wetted paper element	
Camshaft		
Bearings	Steel-backed babbitt	
Intake Valve (at .004" cam lift)	Opens	18° BTC
	Closes	246° ATC
Exhaust Valve (at .004" cam lift)	Opens	245° BTC
	Closes	33° ATC
Intake Duration	264°	
Exhaust Duration	278°	
Carburetor		
Type	4-Barrel	
Make	Rochester Mod-Quad	
Venturi ID (in)	1.218	
Throttle Bore (in)	1.38 Primary; 2.25 Secondary	
Choke Control	Automatic	
Connecting Rods		
Material	Drop forged steel	
Length (in)	6 130-6 140	
Bearings	Premium aluminum	
Crankcase Ventilation	Closed positive	
Crankshaft		
Material	Cast nodular iron	
Number of Counterweights	6	
Main Journal (in)	2.75 (Nominal)	
Crankpin Journal (in)	2.199-2.20	
Torsional Damper	Inertia; rubber mounted	
Bearings	Steel with Premium aluminum or copper-lead insert	
Distributor	High Energy Unit, Delco-Remy; centrifugal & vacuum advance	
Fuel Filter		
Carburetor	Pleated fiber element	
Fuel Tank	Mesh strainer	
Lubrication System	Controlled full pressure	
Main Bearings	Direct pressure	
Camshaft Bearings	Direct pressure	
Timing Gear	Centrifugally sprayed	
Connecting Rods	Direct pressure	
Valve Mechanism	Pressure & gravity	
Cylinder Walls	Cross sprayed by pressurized jets	
Piston Pins	Splash	

7.4 LITER (454 Cu. In.) V8 ENGINES

SPECIFICATIONS


	HIGH TORQUE
	7.4 Liter/454 4-bbl
Oil Capacity	
With filter change	7
W/O filter change	6
Oil Filter	
Standard	Full-flow; replaceable element
Capacity (qts)	.85
Oil Pump	
Type	Spur gear; distributor shaft driven
Capacity (gpm)	6.0 @ 2000
Normal Pressure (psi)	40 @ 2000 rpm
Pistons	
Material	Cast aluminum alloy
Skirt	Slipper
Head	Sump <i>c.c. of Sump 3.93</i>
Piston Pins	
Type	Rod shrink fit to pin
Material	Chromium steel
Piston Rings	
Compression Rings	
Number	2
Type	Upper—barrel face; lower—taper face
Material	Cast alloy iron
Oil Control Rings	
Number	1
Type	Multi-piece
Material	Steel
Thermostat	Harnson: 195°
Valve Train	
Type	Individually mounted rocker arms, push rod actuated
Lifters	Hydraulic
Rocker Arm Ratio	1.70:1
Valve Guides	Pressed-in; cast alloy iron
Valve Lash	Zero
Intake Valves	
Material	Alloy steel
Head Diameter (in)	2.060-2.070
Face Coating	Aluminized
Seats	Machined in cylinder head
Exhaust Valves	
Material	High alloy steel
Head Diameter (in)	1.715-1.725
Face Coating	Aluminized and stellite faced
Seats	Machined in cylinder head; induction hardened
Rotators (exhaust)	Yes
Water Pump	
Type	Centrifugal
Capacity (gpm)	24.5 @ 2000 rpm

COOLING SYSTEMS

OPTIONAL COOLING SYSTEMS (Continued)

CHARTS WILL BE PUBLISHED IN
THE NEXT REVISION


EMISSION CONTROL EQUIPMENT

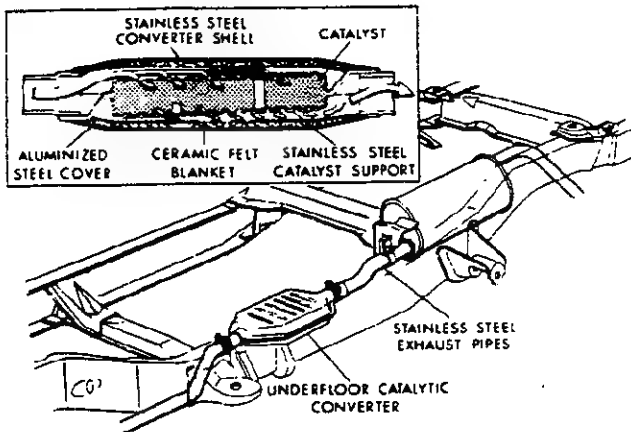


Oxidizing Converter (OC) • Catalytic bed inside converter changes hydrocarbons and carbon monoxide to harmless emissions • Shell made of stainless steel with aluminized steel cover and ceramic felt insulation between • Exhaust pipe ahead of converter also is stainless steel • Catalytic emissions control allows tuning engines for increased fuel economy, improved drivability • Use of unleaded fuel promotes spark plug life, allows longer intervals between recommended oil changes.

On El Camino/Caballero models only, the catalytic converter also contains a thin layer of Rhodium, which causes undesirable oxides of nitrogen (NO_x) to break down into acceptable emission components.

Throttle Return Control (TRC) • Reduces hydrocarbon and carbon monoxide emissions while vehicle is "coasting" • Throttle-lever actuator on carburetor opens primary venturi a pre-set amount over curb idle • Controlled by high manifold vacuum during extended overrun.

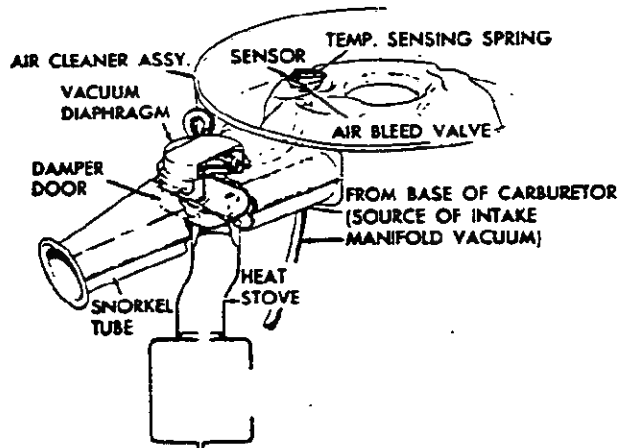


Carburetor Heated Air (CHA) • Allows significantly leaner carburetor calibration for reduced emissions • Heats carburetor air to 100°F when under-hood temperatures are lower • Damper door from exhaust manifold heat stove regulates heated air • Controlled by engine vacuum or bi-metallic thermostat • Minimizes carburetor icing and improves engine drivability during warm-up cycle.

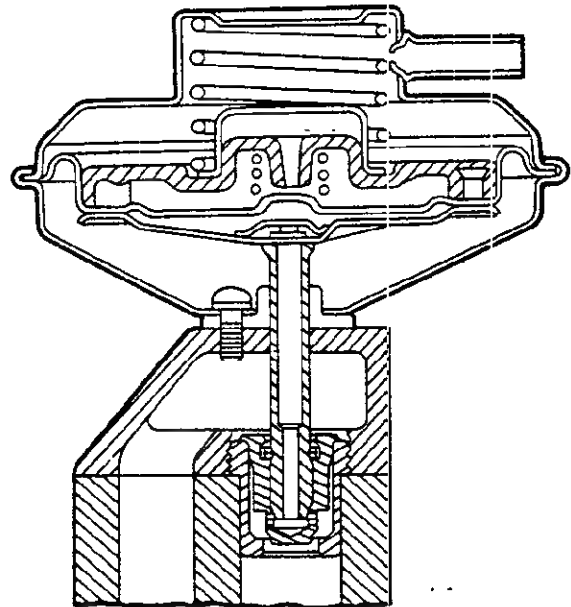

Exhaust Gas Recirculation (EGR) • Introduces exhaust gases to engine induction system through passages cast into intake manifold • Lowers combustion temperatures, reduces formation of nitrogen oxide • Controlled by manifold vacuum and exhaust back pressure • Normally closed at idle.

- QUICKER ENGINE WARM UP
- IMPROVED DRIVEABILITY
- REDUCED EMISSIONS FOR WARM UP CYCLE

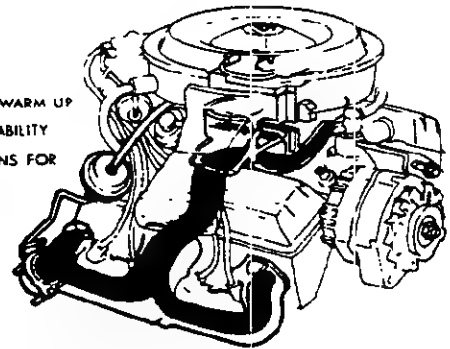

Early Fuel Evaporation (EFE) • Reduces exhaust emissions by preheating incoming fuel for improved combustion on L6 and V8 models • During cold starts, vacuum motor immediately closes exhaust manifold heat valve • Hot exhaust gases flow around inlet manifold and heat incoming fuel • More complete fuel evaporation during warm-up improves drivability • On L4 and V6 models, an electric heating element located under the carburetor achieves the same as above.

COOLING SYSTEMS

STANDARD COOLING SYSTEMS

§TUBE AND CENTER CROSS-FLOW-TYPE RADIATOR WITH
MULTILOUVER DESIGN AND 15 LB. PRESSURE CAP.

SERIES	Engine (Liter/Cu. In.)	Radiator			System Capacity (gal) ★	Fan (No. blades x diameter x pitch)
		Thick- ness (in)	Dist. Between Tubes (Constant) (in)	Frontal Area (sq in)		
Astro/Safari	2.5/151	.93	.18	296	2.3	4 x 15.98 x 1.50
	4.3/262	.93	.18	407	3.4	3 x 18.03 x 2.60 ■
S-10/15	1.9/119	.98	.18	235	2.4	4 x 17 x 1.57
	2.5/151	.98	.18	360	3.0	4 x 17 x 1.57
	2.2/137	.98	.16	360	3.0	4 x 17 x 1.57
	2.8/173	.98	.16	282	3.1	7 x 14.96 x 2.72 ■
C10/1500	4.3/262	.93	.14	358	3.4	3 x 19 x 2.56 ■
	5.0/305	.98	.16	384	4.3	3 x 19 x 2.71 ■
	5.7/350	.98	.16	537	4.3	3 x 19 x 2.71 ■
	6.2/379	1.57	.16†	645	6.2	5 x 20 x 2.87 ■
G10/1500	4.3/262	.93	.14	358	3.4	3 x 19 x 2.56 ■
	5.0/305	.98	.16	479	4.2	3 x 19 x 2.66 ■
	5.7/350	.98	.12	479	4.2	3 x 19 x 2.66 ■
K10/1500	4.3/262	.93	.14	358	3.4	3 x 19 x 2.56 ■
	5.0/305	.98	.16	384	4.3	3 x 19 x 2.56 ■
	5.7/350	.98	.16	537	4.3	3 x 19 x 2.56 ■
	6.2/379	1.57	.16†	645	6.2	5 x 20 x 2.87 ■
C20/2500	4.3/262	.93	.14	358	3.4	3 x 19 x 2.56 ■
	4.8/292	.98	.16	445	3.8	3 x 19 x 2.71 ■
	5.0/305	.98	.16	384	4.3	3 x 19 x 2.71 ■
	5.7/350	.98	.16†	479	4.3	3 x 19 x 2.71 ■
	7.4/454	1.57	.16	537	5.4	5 x 19.5 x 2.18 ■
	6.2/379	1.57	▲	645	6.2	5 x 20 x 2.87 ■
G20/2500	4.3/262	.93	.14	358	3.4	3 x 19 x 2.56 ■
	5.0/305	.98	.16	479	4.2	3 x 19 x 2.66 ■
	5.7/350	.98	.12	479	4.2	3 x 19 x 2.66 ■
	6.2/379	1.57	.12	479	6.3	5 x 20 x 2.87 ■
K20/2500	4.8/292	.98	.16	445	3.8	3 x 19 x 2.71 ■
	5.7/350	.98	.16†	479	4.3	3 x 19 x 2.71 ■
	6.2/379	1.57	▲	645	6.2	5 x 20 x 2.87 ■
P20/2500	4.8/292	.98	.16	445	3.5	5 x 19 x 2.56 ■
	5.7/350	.98	.16	479	4.0	5 x 19.5 x 2.18 ■
	6.2/379	1.57	.12	645	6.2	5 x 19.7 x 2.88 ■
C30/3500	4.8/292	.98	.16	445	3.8	3 x 19 x 2.71 ■
	5.7/350	.98	.16†	479	4.3	3 x 19 x 2.71 ■
	7.4/454	1.57	.16	537	5.4	5 x 19.5 x 2.18 ■
	6.2/379	1.57	.12	645	6.2	5 x 20 x 2.87 ■
G30/3500 (05) w/o C6P	4.3/262	.93	.14	358	3.4	3 x 19 x 2.56 ■
G30/3500 (06) w/o C6P	5.7/350	.98	.12	479	4.2	5 x 19.5 x 2.18 ■
G30/3500/C6P (05), G30/3500/C6P (06)	5.7/350	.98	.12	479	4.2	5 x 19.5 x 2.18 ■
	6.2/379	1.57	.12	479	6.2	5 x 20 x 2.87 ■
G30/3500 (03)	5.7/350†	1.57	.12	479	4.3	5 x 19.5 x 2.18 ■
	6.2/379†	1.57	.12	479	6.2	5 x 20 x 2.87 ■
G30/3500 (32)	5.7/350†	1.57	.12	479	4.3	5 x 19.5 x 2.18 ■
	6.2/379†	1.57	.12	479	6.2	5 x 20 x 2.87 ■
K30/3500	4.8/292	.98	.16	445	3.8	3 x 19 x 2.71 ■
	5.7/350	.98	.16	479	4.3	3 x 19 x 2.71 ■
	7.4/454	1.57	.16	537	5.4	5 x 19.5 x 2.18 ■
	6.2/379	1.57	.12	645	6.2	5 x 20 x 2.87 ■
P30/3500 (Exc. Motor Home Chassis)	4.8/292	.98	.16	445	3.5	5 x 19 x 2.56 ■
	5.7/350	.98	.16	479	4.0	5 x 19.5 x 2.18 ■
	6.2/379	1.57	.12	645	6.2	5 x 19.7 x 2.88 ■
P30/3500 Motor Home Chassis*	7.4/454†	2.17	.10	537	5.7	7 x 19.5 Flex ■
	6.2/379†	2.17	.10	537	7.0	5 x 19.7 x 2.88 ■

*Down-flow type radiator. ‡Automatic transmission standard. ▲.16 with LH6; .12 with LL4.

★ Capacity (approx.) shown with standard heater (except P20-30 models) and standard coolant recovery system.

■ Temperature controlled clutch fan § All models with automatic transmissions include a transmission oil cooler integral with the radiator. †.12 with 4.10, 4.56 axle ratio. ♦ .12 with 3.73 axle ratio

FUEL TANKS

SPECIFICATIONS

Series	Tank Location	Std/ Opt	Approx. Tank Cap. (gallons)	Filler Location	Description
†Blazer/Jimmy; Pickups; Suburban; Chassis-Cab Models					
El Camino/Caballero	Behind rear axle	Std	17.7	Left Side	Rectangular
		Opt	22	Left Side	Rectangular
5-10/15 Models	Inboard LH frame rail	Std	▲13.2	Left Side	Rectangular
		Opt	20.0	Left Side	Step-shape Rectangle
K10/1500 Blazer/Jimmy	Inboard frame behind rear axle	Std	■25	Right Side (Rear)	Rectangular
		Opt	◆31	Right Side (Rear)	Rectangular
C/K10/1500-20/2500 Suburban	Inboard frame behind rear axle	Std	■25	Right Side (Rear)	Rectangular
		Opt	◆31	Right Side (Rear)	Rectangular
		Opt	★40	Right Side (Rear)	Rectangular
C/K10703	Outboard LH frame rail	Std	16	Left Center	Step-shape Rectangle
	Outboard RH frame rail	Opt	16	Right Center	Step-shape Rectangle
C/K10903 C/K20903-43 C/K30903-43 C/K31003, C/K31403	Outboard LH frame rail	Std	20	Left Center	Step-shape Rectangle
	Outboard RH frame rail	Opt	●20	Right Center	Step-shape Rectangle
†Astro/Safari; Chevy Van/Vandura; Sportvan/Rally; Cutaway Van; Hi-Cube Van					
Astro/Safari	Between frame rails forward of rear axle	Std	17	Left Side	Rectangular
		Opt	27	Left Side	Rectangular
G10/1500-20/2500; G30/3500 (06)	Between frame rails behind rear axle	Std	22	Left Rear	Rectangular
		Opt	33	Left Rear	Rectangular
G30/3500 (05)	Between frame rails behind rear axle	Std	22	Left Rear	Rectangular
		Opt	33	Left Rear	Rectangular
G30/3500 (03)	Between frame rails behind rear axle	Std	22	Left Rear	Rectangular
		Opt**	33	Left Rear	Rectangular
Forward Control Models					
P20/2500; P30/3500	Between frame rails behind rear axle	Std	40	Left Rear	Rectangular
P30/3500 Motor Home Chassis*	Between frame rails behind rear axle	Std	40	Left Rear	Rectangular

*P30/3500 Motor Home Chassis has temporary 5 qt fuel tank connected for shipping purposes.

**Std on RV Cutaway Van.

†All Light Duty Emissions and California Heavy Duty Emission vehicles are equipped with evaporative emission controls.

■ Approximately 27 gallons with 6.2 Liter diesel engine.

◆ Approximately 32 gallons with 6.2 Liter diesel engine.

★ Approximately 41 gallons with 6.2 Liter diesel engine.

● When C-K10903 and K20903 models below 8500 lbs. GVWR are ordered with auxiliary fuel tank RPO NL2, the base tank and the auxiliary tank have an approximate capacity of 16 gal. each (total approximately 32 gal.)

▲ Approximately 14 gallons with 2.2 Liter diesel engine.

FUEL TANKS

SPECIFICATIONS

Series	Tank Location	Std/ Opt	Approx. Tank Cap. (gallons)	Filler Location	Description
Blazer/Jimmy; Pickups; Suburban; Chassis-Cab Models					
El Camino/Caballero	Behind rear axle	Std	17.7	Left Side	Rectangular
		Opt	22	Left Side	Rectangular
S-10/15 Models	Inboard LH frame rail	Std	▲13.2	Left Side	Rectangular
		Opt	20.0	Left Side	Step-shape Rectangle
K10/1500 Blazer/Jimmy	Inboard frame behind rear axle	Std	■25	Right Side (Rear)	Rectangular
		Opt	◆31	Right Side (Rear)	Rectangular
C/K10/1500-20/2500 Suburban	Inboard frame behind rear axle	Std	■25	Right Side (Rear)	Rectangular
		Opt	◆31	Right Side (Rear)	Rectangular
		Opt	★40	Right Side (Rear)	Rectangular
C/K10703	Outboard LH frame rail	Std	16	Left Center	Step-shape Rectangle
	Outboard RH frame rail	Opt	16	Right Center	Step-shape Rectangle
C/K10903 C/K20903-43 C/K30903-43 C/K31003, C/K31403	Outboard LH frame rail	Std	20	Left Center	Step-shape Rectangle
	Outboard RH frame rail	Opt	◆20	Right Center	Step-shape Rectangle
Astro/Safari; Chevy Van/Vandura; Sportvan/Rally; Cutaway Van; Hi-Cube Van					
Astro/Safari	Between frame rails forward of rear axle	Std	17	Left Side	Rectangular
		Opt	27	Left Side	Rectangular
G10/1500-20/2500; G30/3500 (06)	Between frame rails behind rear axle	Std	22	Left Rear	Rectangular
		Opt	33	Left Rear	Rectangular
G30/3500 (05)	Between frame rails behind rear axle	Std	22	Left Rear	Rectangular
		Opt	33	Left Rear	Rectangular
G30/3500 (03)	Between frame rails behind rear axle	Std	22	Left Rear	Rectangular
		Opt**	33	Left Rear	Rectangular
Forward Control Models					
P20/2500; P30/3500	Between frame rails behind rear axle	Std	40	Left Rear	Rectangular
P30/3500 Motor Home Chassis*	Between frame rails behind rear axle	Std	40	Left Rear	Rectangular

*P30/3500 Motor Home Chassis has temporary 5 qt fuel tank connected for shipping purposes

**Std on RV Cutaway Van.

†All Light Duty Emissions and California Heavy Duty Emission vehicles are equipped with evaporative emission controls

■Approximately 27 gallons with 6.2 Liter diesel engine.


◆Approximately 32 gallons with 6.2 Liter diesel engine

★Approximately 41 gallons with 6.2 Liter diesel engine.

●When C-K10903 and K20903 models below 6500 lbs GVWR are ordered with auxiliary fuel tank RPO NL2, the base tank and the auxiliary tank have an approximate capacity of 16 gal each (total approximately 32 gal)

▲Approximately 14 gallons with 2.2 Liter diesel engine


EMISSION CONTROL EQUIPMENT

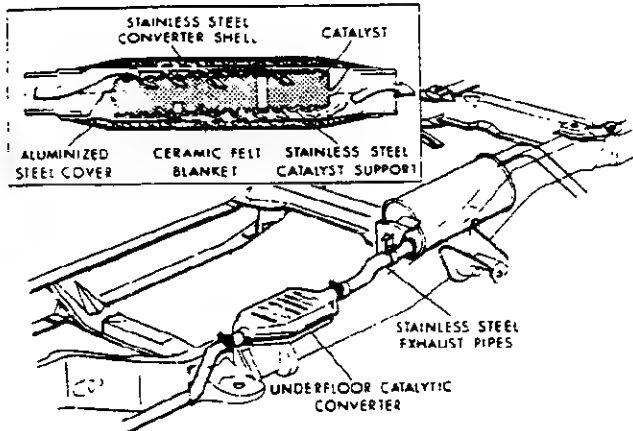


Oxidizing Converter (OC) • Catalytic bed inside converter changes hydrocarbons and carbon monoxide to harmless emissions • Shell made of stainless steel with aluminized steel cover and ceramic felt insulation between • Exhaust pipe ahead of converter also is stainless steel • Catalytic emissions control allows tuning engines for increased fuel economy, improved drivability • Use of unleaded fuel promotes spark plug life, allows longer intervals between recommended oil changes.

On El Camino/Caballero models only, the catalytic converter also contains a thin layer of Rhodium, which causes undesirable oxides of nitrogen (NO_x) to break down into acceptable emission components.

Throttle Return Control (TRC) • Reduces hydrocarbon and carbon monoxide emissions while vehicle is "coasting" • Throttle-lever actuator on carburetor opens primary venturi a pre-set amount over curb idle • Controlled by high manifold vacuum during extended overrun.

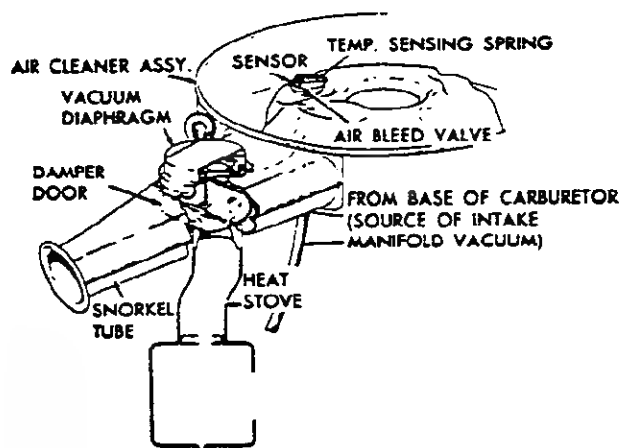


Carburetor Heated Air (CHA) • Allows significantly leaner carburetor calibration for reduced emissions • Heats carburetor air to 100°F when under-hood temperatures are lower • Damper door from exhaust manifold heat stove regulates heated air • Controlled by engine vacuum or bi-metallic thermostat • Minimizes carburetor icing and improves engine drivability during warm-up cycle.

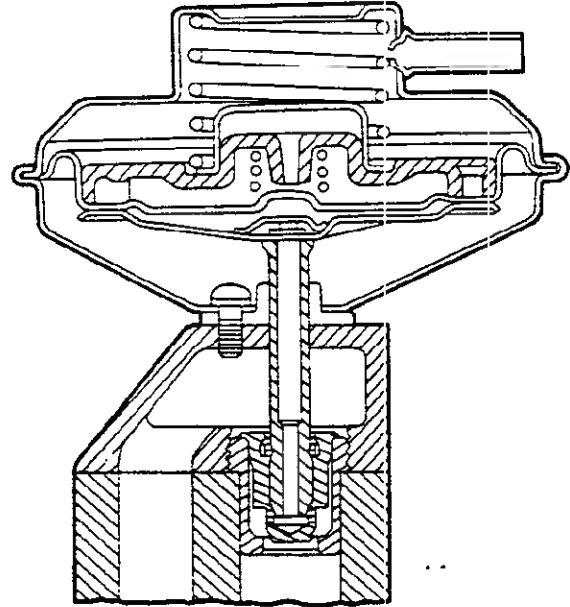

Exhaust Gas Recirculation (EGR) • Introduces exhaust gases to engine induction system through passages cast into intake manifold • Lowers combustion temperatures, reduces formation of nitrogen oxide • Controlled by manifold vacuum and exhaust back pressure • Normally closed at idle.

- QUICKER ENGINE WARM UP
- IMPROVED DRIVEABILITY
- REDUCED EMISSIONS FOR WARM UP CYCLE

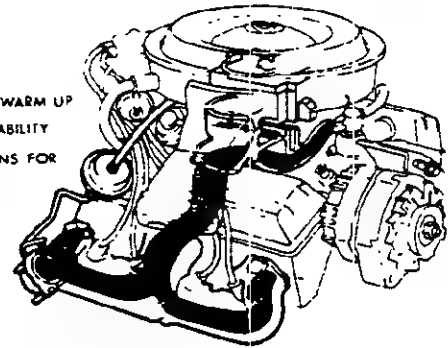


Early Fuel Evaporation (EFE) • Reduces exhaust emissions by preheating incoming fuel for improved combustion on L6 and V8 models • During cold starts, vacuum motor immediately closes exhaust manifold heat valve • Hot exhaust gases flow around inlet manifold and heat incoming fuel • More complete fuel evaporation during warm-up improves drivability • On L4 and V6 models, an electric heating element located under the carburetor achieves the same as above.

EMISSION CONTROL EQUIPMENT


GENERAL

Exhaust emissions are controlled on all gasoline powered truck models. The system employed is the Air Injection Reactor (A.I.R.). This system employs aluminized exhaust system components.

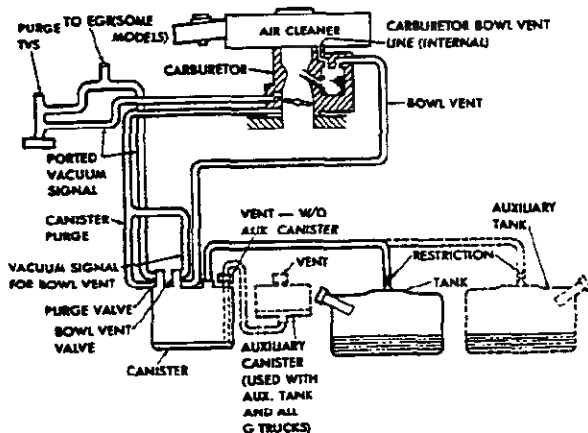

EVAPORATIVE EMISSION CONTROLS



All Series Truck models under 8501 lbs. GVWR (classified as Light Duty emission by the Environmental Protection Agency [EPA]), must include equipment to control fuel vapor emissions. The State of California also requires evaporative emission control for the other Series 1-2-3 models classified as Heavy Duty emission (over 8500 lbs. GVWR). Basically this system starts at the fuel tank by extending a line from the metering unit to the vapor storage canister. The metering unit is an integral unit which, in addition to fuel pickup and gage registration, provides: (a) Outlet for vapor to canister; (b) Fill limiting function; fuel fill venting; (c) Separation of vapor from liquid fuel and fuel return line inlet. A single line carries the vapors to a canister which stores the vapors when the engine is not running, but distributes the vapors to the carburetor when the engine is running. Emissions from the carburetor are reduced by providing an insulator below the carburetor to control the float bowl temperature. On El Camino/Caballero models, and on C, K and G V8 engine models, carburetor fuel vapors are collected in an air cleaner carbon ring when the engine is not running

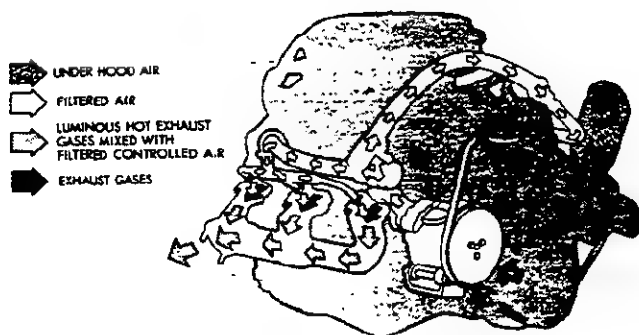

AIR INJECTION REACTOR (A.I.R.)

With this system, emissions of unburned hydrocarbons and carbon monoxide are controlled to levels specified by the Federal Motor Vehicle Air Pollution Control Act by injection of air into each exhaust valve port or into exhaust system before the converter. This provides oxygen to support combustion of the luminous hot exhaust gases and continues oxidation of unburned hydrocarbons and carbon monoxide in the exhaust system.

The system is comprised of an air pump, diverter valve and silencer, check valves, air manifold, thermostatically controlled air cleaner and modifications to the carburetor and ignition distributor. Air for injection into the exhaust manifold is provided by a crankshaft-driven semi-articulated vane-type pump. Inlet air is cleaned by means of a centrifugal vane unit which separates dust particles and water from the air. The diverter valve functions as a pressure limiting valve which maintains a constant flow of air to the exhaust manifold. Check valves, one on six-cylinder engines and two on eight-cylinder engines, operate to prevent backflow of exhaust gases in event of pump or drive belt failure.

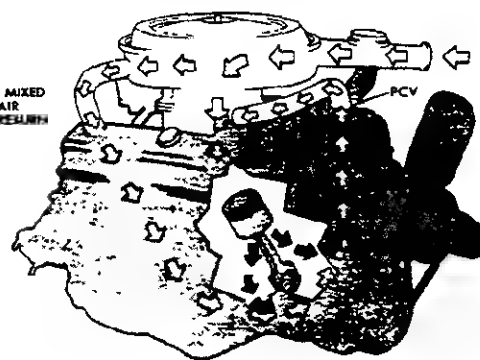

POSITIVE CRANKCASE VENTILATION (PCV)

All gasoline engines are equipped with PCV. This system prevents any crankcase emission being discharged into the atmosphere. It primarily consists of a completely sealed crankcase with a PCV valve and connections that returns blow-by gases to the combustion chamber where they are burned.

EMISSION CONTROL EQUIPMENT

Light-Duty Emissions Systems (8500 lbs. GVWR and under)																		
Engine	RPO	Application	PCV	EGR	ECS	EFE	CHA	OC*	AIR	TVSS	DFI	ESC	CDR	CL	ORC	EPR	SEGR	MEGR
1.9 Liter 118.9 L4 2-bbl	LR1	Federal	X	X	X	X	X	X	X									
		California	X	X	X	X	X		X					X	X			
2.5 Liter 151 L4 EFI	LN8	Federal	X	X	X	X	X	X	X					X				
		California	X	X	X	X	X		X					X	X			
2.2 Liter 136.6 L4 Diesel	LQ7	Federal									X							
		California									X						X	
2.8 Liter 173 V6 2-bbl	LR2	Federal	X	X	X	X	X	X	X	X								
		California	X	X	X	X	X		X	X				X	X			
4.3 Liter 262 V6 4-bbl	LB1	Federal	X	X	X	X	X	X	X	X								
		California	X	X	X	X	X		X	X				X	X			
5.0 Liter 305 V8 4-bbl	LE9	Federal	X	X	X	X	X	X	X	X		X						
		California				Not Offered												
5.0 Liter 305 V8 4-bbl	LF3	Federal				Not Offered												
		California	X	X	X	X	X		X	X				X	X			
5.7 Liter 350 V8 4-bbl	LS9	Federal	X	X	X	X	X	X	X	X								
		California	X	X	X	X	X		X	X				X	X			
6.2 Liter 379 V8 Diesel	LH6	Federal									X		X			X	X	
		California									X		X			X		X

■ "Federal" indicates required Emission Systems in all states except California:

"California" refers to equipment required for California only.

* Not used on Step-Van/Value Van or FC Chassis.

Heavy-Duty Emissions Systems (Over 8500 lbs. GVWR)													
Engine	RPO	Application	PCV	EFE	ECS	TRC	CHA	AIR	TVSS	ISS	DFI	CDR	
4.8 Liter 292 L6 1-bbl	L25	Nationwide	X		X	X	X	X	X	X			
5.7 Liter 350 V8 4-bbl	LT9	Nationwide	X	X	X	X	X	X	X				
6.2 Liter 379 V8 Diesel	LL4	Nationwide									X	X	
7.4 Liter 454 V8 4-bbl	LE8	Nationwide	X	X	X	X	X	X	X				

PCV—Positive Crankcase Ventilation

EGR—Exhaust Gas Recirculation

ECS—Evaporation Control System

EFE—Early Fuel Evaporation

CHA—Carburetor Heated Air

CDR—Crankcase Depression Regulator

OC—Oxidizing Converter

SEGR—Switched Exhaust Gas Recirculation

AIR—Air Injection Reactor System

TRC—Throttle Return Control

TVSS—Trapped Vacuum Spark System

ISS—Idle Stop Solenoid

DFI—Diesel Fuel Injection

ESC—Electronic Spark Control

CL—Closed Loop

ORC—Oxidizing-Reducing Converter

EPR—Exhaust Pressure Regulator

MEGR—Modulated Exhaust Gas Recirculation

EPA ESTIMATED MILEAGE LABELS

The Environmental Protection Agency now publishes estimated mileage figures for all vehicles up to 8500 lbs. GVWR. EPA mileage figures are not available for trucks over 8500 lbs. GVWR.

EPA ratings are estimates. The actual mileage you get will vary depending on the type of driving you do, your driving habits, your truck's condition and available equipment.

GM truck models which are rated at 8500 lbs. GVWR or below will have an EPA Fuel Economy Label affixed to the inside of the front passenger door window, readable from the outside of the vehicle. This label will list the estimated miles per gallon. It will also list that particular vehicle's VIN number, vehicle name, number of cylinders, engine displacement, carburetor (number of barrels), and type of transmission (manual or automatic).

GM light-duty trucks which will display this label are

Astro/Safari

S-10/15 Models

El Camino/Caballero

G10/1500 Pickups, Suburbans and Blazer/Jimmy

G20/2500 Pickup†

K10/1500 Pickup, Suburban and Blazer/Jimmy

K20/2500 Pickup*

G10/1500-20/2500 Sportvan/Rally, Chevy Van/Vandura

G30/3500 Sportvan/Rally @ 7400-lb. GVWR

G30/3500 Chevy Van/Vandura @ 7100-lb. GVWR


†Without C6P Heavy-Duty Chassis.

TRANSMISSION & DRIVELINE

INDEX

	Page
3-Speed Transmissions	2
Automatic Transmissions	3
4-Speed Transmissions	4
5-Speed Transmissions	5
Transfer Case & Odometer Corrections	6
Clutches	7
Driveline	8, 9
Power Take-Off Equipment	10

FRAMES

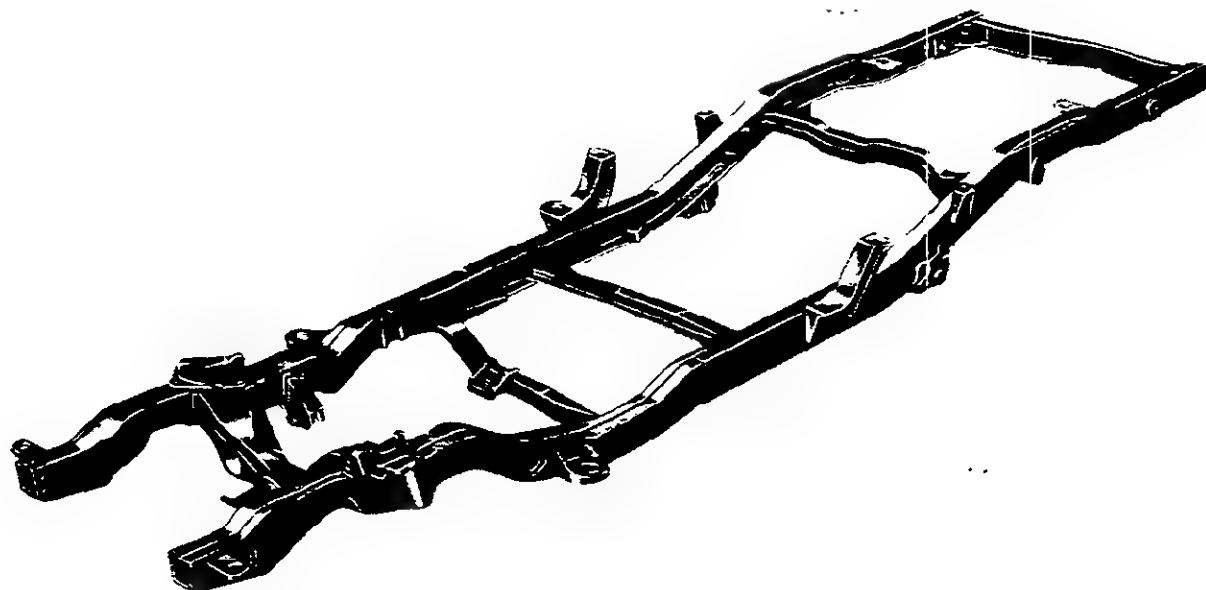


Typical Frame Shown

S-10/15 MODELS

S-10/15 models have a full frame construction with a welded steel box-section front frame section supporting an integral engine-front suspension crossmember and welded to an open channel rear frame. Four different rear rail assemblies are used to provide four frame lengths for the 100.5" WB Blazer/Jimmy, 108.3" and 117.9" WB regular cab Pickups, Chassis-Cabs and the 122.9" WB Extended Cab Pickups. Rear crossmembers are securely riveted to the side

rails. Included are a combination rear spring and fuel tank crossmember and a rear Z member. The transmission support is an aluminized steel formed tubular-type and is bolted to the frame. A single bracket attached to each side rail provides attachment for both the rear of the cab and the front of the pickup box to assure perfect alignment. A hot wax coating is used for corrosion protection.


AUTOMATIC TRANSMISSIONS

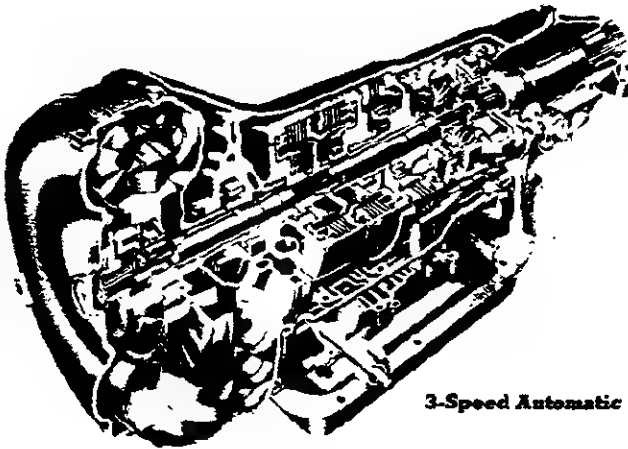

3-Speed Automatic



Typical 10/1500-30/3500 Series
Six Position Selector

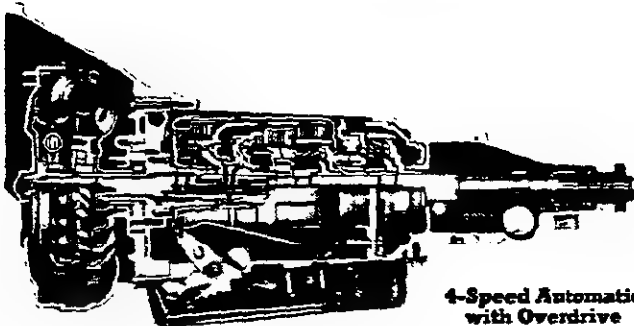

4-Speed Automatic
with Overdrive



Automatic Overdrive Selector

The 3- and 4-speed automatic transmissions shown in the chart below provide excellent performance, smoothness and flexibility through a 3-element torque converter with a compound planetary gearset. The forward gear affords improved fuel economy and better performance by more efficient use of engine torque thru all ranges.

The 700R4 4-speed with overdrive includes a three-element torque converter and a converter lockup clutch. The gearbox involves an extra set of clutches and gears to provide an overdrive mode. The overall design incorporates technology for overall efficiency of operation and low weight. The 3.06 first gear produces very good acceleration characteristics, and the wide-ratio spread provides good gradability with heavier loads.

A six-position selector for the 3-speed automatic with overdrive on light-duty models provides the following ranges: Park (P), Reverse (R), Neutral (N), Drive (D), Low Two (L2), and Low One (L1). Moving the selector

to L2 locks out third gear entirely, with automatic shifting between first and second gears. The transmission is locked in low gear when L1 is selected.

The seven-position selector for the 4-speed automatic with overdrive provides the following ranges: Park (P), Reverse (R), Neutral (N), Overdrive (D), Drive (D), Low Two (2), and Low One (1). Moving the lever to the Overdrive position will allow the transmission to shift into the overdrive mode at speeds above 40 mph.

Automatic shifting schedules are controlled by a vacuum modulator (except model 200) instead of the mechanical linkages used in other designs. This allows smoother shifts by "sensing" engine vacuum changes.

The 475 is specifically suitable to "stop and go" type of operation such as delivery trucks. It is available on P-30/3500 models with the 10,000 lbs or 11,000 lbs capacity rear axle for the 12,000-14,500 lbs GVWR range.

Specifications



Automatic											
Model & RPO Number		200 MX1		350 MX1		400 MX1		475** MX1		700R4▲ MX0	
Torque Converter		Lock-Up	Break-away	Lock-Up	Break-away	Lock-Up	Break-away	Lock-Up	Break-away	Lock-Up	Break-away
Gear Ratios	First	2.74	6.08	2.52	5.29	2.48	5.70	2.48	5.46	3.06	6.73
	Second	1.57	3.49	1.52	3.19	1.48	3.40	1.48	3.26	1.63	3.58
	Third	1.00	2.22	1.00	2.10	1.00	2.30	1.00	2.20	1.00	2.20
	Fourth	—	—	—	—	—	—	—	—	.70	1.50
	Reverse	2.07	4.60	1.94	4.07	2.10	4.83	2.10	4.62	2.29	5.03
Gear Type		Planetary									
Torque Converter	Element Types Lock-Up Gear Type	Pump, Stator, Turbine Automatic Planetary									
Lubricant Capacity	Dry Fill Refill	13 Pints 7 Pints		20 Pints 5 Pints		19 Pints 9 Pints					

**P30/3500 (32-42) models only with 10,000 or 11,000 lb. rear axle.

▲4-speed with overdrive.

4- & 5-SPEED TRANSMISSIONS

SM465

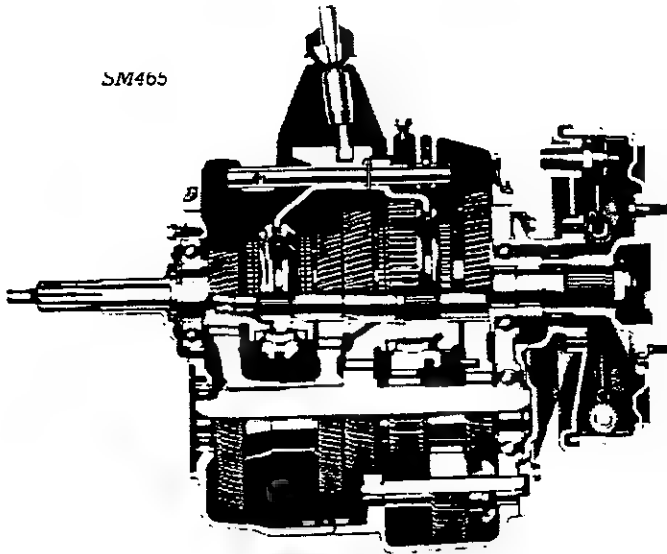

**SM465
Gearshift Lever
Positions**

SM465 4-SPEED

The 4-speed transmission provides constant mesh type first gear for durability and quiet operation, synchromesh gear engagement in second, third and fourth gears for clashless engagement and non-metallic coated shifter forks for quieter operation. A damper for reduced torsional gear rattle is used on models with rear wheel parking brakes.

High gear pressure angles combined with generous gear face widths resist pitting and provide greater tooth contact area.

The transmission also has heavy-duty bearings and strong rigid shafts for good reliability under extreme operating conditions. A magnet removes metallic particles from the lubricant, reducing wear to moving parts.


Series 10/1500-30/3500 models use cable-actuated rear brakes for a parking brake. P30/3500 models (except Motor Home) with the 11,000-lb rear axle use a transmission mounted internal expanding parking brake that is similar to a rear wheel brake without the wheel cylinder.

Specifications

	SM465 4-Speed RPO MM4	4-Speed RPO MM4			4-Speed w/Overdrive RPO MM7
Synchronized Speeds	2nd, 3rd & 4th	1st, 2nd, 3rd & 4th			1st, 2nd, 3rd & 4th (OD)
Gear Ratios:					
First	6.55	3.50	4.01	4.03	3.09
Second	3.58	2.16	2.25	2.37	1.67
Third	1.70	1.45	1.42	1.49	1.00
Fourth	1.00	1.00	1.00	1.00	.73
Reverse	6.09	3.50	3.90	3.76	3.00
Gear Types:		All Forward Reverse			
Helical		None			None
Spur					
Power Take-Off Data:					
Opening type	SAE Std 6-Bolt				
Location	Both Sides				
Drive gear	3rd Speed Countergear				
PTO gear rpm at 1000 engine rpm	425				
PTO Pitch Line velocity at 1000 engine rpm	560 Ft/Minute				
Center distance	117mm	76mm	77.5mm	77mm	89mm
Lubricants:					
Oil Capacity (pints)	8	2.4	4.8	4.1	7.5
Type, grade	See Owner's Guide				
Brakes, Parking:					
Type	Internal Expanding*		None		None
Drum diameter (in)	11.0				
Lining area (sq in)	41.8				

*Rear wheels on Series 10/1500-30/3500 and Series P30/3500 models without the 11,000-lb rear axle.

5-SPEED TRANSMISSIONS

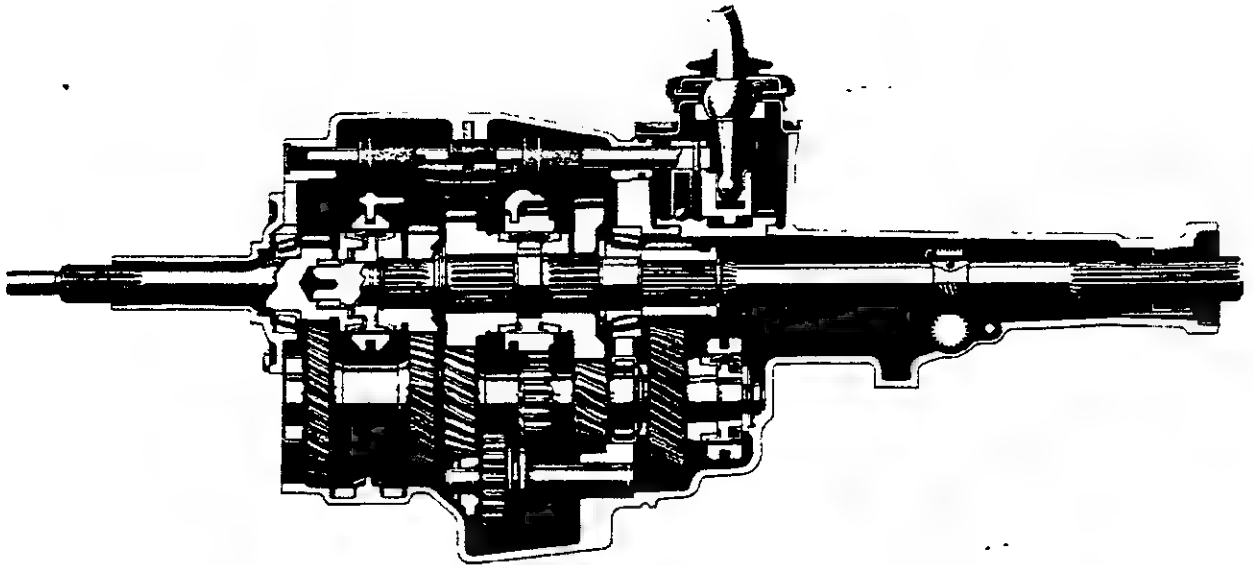


Specifications

	5-Speed w/Overdrive RPO MM5			
Synchronized Speeds	1st, 2nd, 3rd, 4th & 5th (OD)			
Gear Ratios:				
First	3.50	3.76	4.03	4.03
Second	2.14	2.18	2.37	2.37
Third	1.39	1.42	1.50	1.49
Fourth	1.00	1.00	1.00	1.00
Fifth73	.72	.76	.72
Reverse	3.39	3.76	3.76	3.76
Gear Types:				
Helical	All Forward Reverse			
Spur				
Center distance	77mm			
Lubricants:				
Oil Capacity (pints)	4.1			
Type, grade	See Owner's Guide			

TRANSFER CASES

FOUR-WHEEL-DRIVE TRANSFER CASE T-10/15 & SERIES K10/1500-30/3500

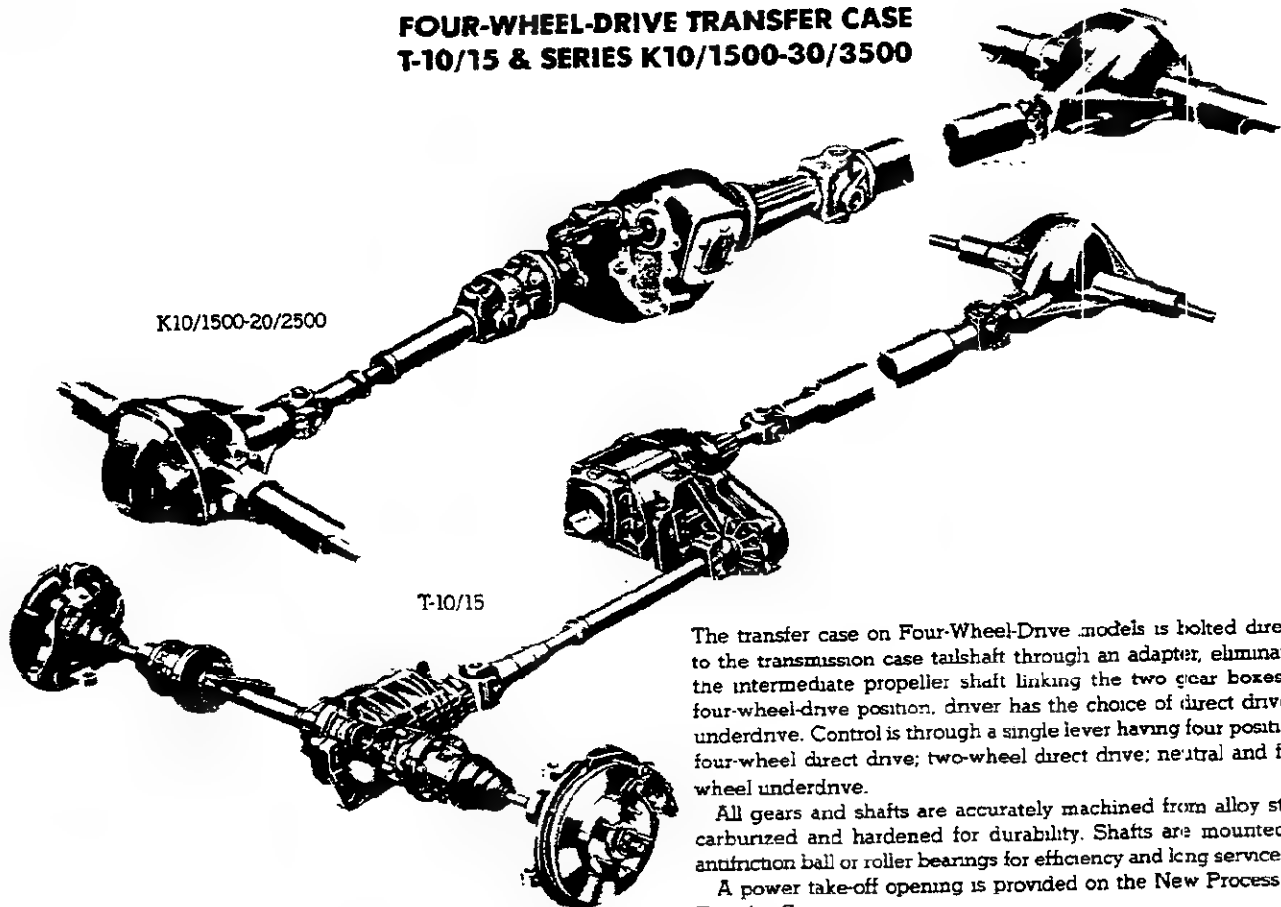

The transfer case on Four-Wheel-Drive models is bolted directly to the transmission case tailshaft through an adapter, eliminating the intermediate propeller shaft linking the two gear boxes. In four-wheel-drive position, driver has the choice of direct drive or underdrive. Control is through a single lever having four positions: four-wheel direct drive; two-wheel direct drive; neutral and four-wheel underdrive.

All gears and shafts are accurately machined from alloy steel, carburized and hardened for durability. Shafts are mounted on antifriction ball or roller bearings for efficiency and long service life.

A power take-off opening is provided on the New Process 205 Transfer Case.

Specifications


Make & Model No.	New Process 207	New Process 208	New Process 205
Availability	T-10/15	K10/1500-20/2500	K30/3500
Ratios: Hi Range	1.00 to 1	1.00 to 1	1.00 to 1
Lo Range	2.61 to 1	2.61 to 1	1.96 to 1
Lever Positions	4-Lo (All wheel underdrive) N (Neutral) 2-Hi (Rear wheel drive) 4-Hi (All wheel direct drive)		
Lever Location	Rear of transmission at center of floor		
Power Take-Off Data: Opening & Location	None	None	SAE 6-bolt; Left side
Lubricants: Oil capacity	4.6 pints	5.2 pints	
Type, grade	See Owner's Guide		

ODOMETER CORRECTIONS

Speedometer drive gears are cut to the nearest full tooth when they are manufactured. This causes errors in the mileage indicated on the odometer in the vehicle when various transmission and rear axle combinations are used. Changing tires from a smaller to a larger tire size also causes errors in the indicated mileage. These errors are reduced by the use of adapters that are placed

on the speedometer gears when optional transmissions, optional rear axles or optional larger rear tires are ordered from the factory. Odometer adapter gear information and percent of error in odometer readings for the various transmission, rear axle and tire combinations can be obtained from the Zone Service Manager.

CLUTCHES

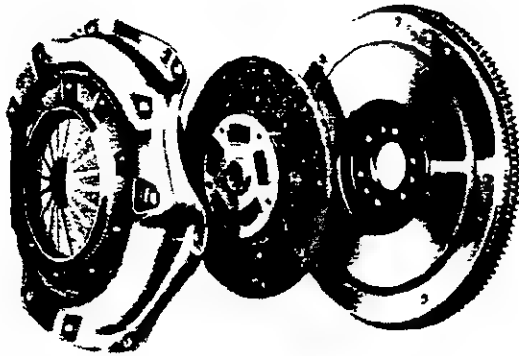


DIAPHRAGM-SPRING CLUTCHES

GM's diaphragm-spring clutches are well known for driving ease and dependability. The diaphragm spring operates with very light pedal pressure, yet directs uniformly high pressure to the pressure plate and clutch disc. Self-lubricating pilot bushing and permanently lubricated throw-out bearing require no maintenance between normal clutch overhauls.

CLUTCH APPLICATION CHART

MODEL	GVWR	ENGINE	CLUTCH SIZE			
		Liter/Cu. In.	8.46 in. dia.	9.13 in. dia.	11 in. dia.	12 in. dia.
Astro/Safari	All	2.5/151		X		
		4.3/262			X	
S-10/15	All	1.9/119	X			
		2.5/151		X		
		2.2/137	X			
		2.8/173		X		
C10/1500	4700-6100	All			X	
	6100-7000	4.3/262			X	
		5.0/305			X	
		5.7/350				X
		6.2/379				X
K10/1500	All	4.3/262			X	
		5.0/305			X	
		5.7/350				X
		6.2/379				X
G10/1500	All	All			X	
C-K-G-P 20/2500- 30-/3500	All	4.3/262			X	
		4.8/292			X	
		5.0/305				X
		5.7/350				X
		6.2/379				X
		7.4/454				X

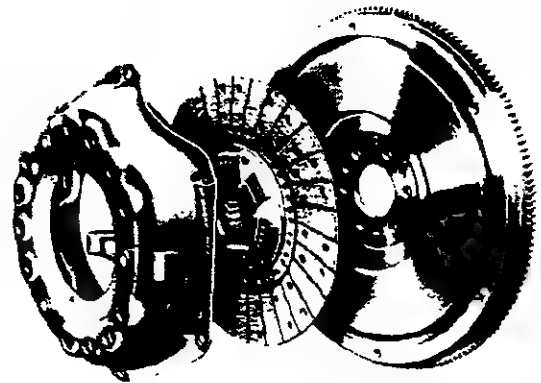

COIL-SPRING CLUTCHES

GM's coil-spring clutches combine operating ease with high torque capacity and durability in severe truck service. Heat-treated coil springs direct pressure to the pressure plate and driven disc. Coil-spring construction affords good ventilation for cooler operation and protection against burned facings. Pilot bushing and throw-out bearing are self-lubricated.

CLUTCH CONTROLS

All Light Duty G & P models use mechanical clutch controls. C/K, Astro/Safari and S-10/15 models have hydraulic operated controls.

SPECIFICATIONS

Clutch Size (in)	DIAPHRAGM CLUTCH				COIL SPRING CLUTCH
	8.46	9.13	11	12	12
Clutch Springs					
Material	Spring steel				
Number used	1	1	1	1	12
Total pressure (lbs)	948*	1110	1900†	2075	2060(a)
Driven Disc					
Type	Dry disc with two facings				
Number of plates	1				
Material	Woven composition				
Outside diameter (in)	8.46	9.125	11	11.85	11.88
Inside diameter (in)	5.90	6.125	6.5	6.75	6.75
Thickness (in)	.138	.135	.135	.140	.140
Area (sq in)	57.7	71.9	123.7	149.0	149.2
Bearings					
Clutch-release type	Single-row ball				
Pilot type	Sintered-powdered bronze bushing				
Flywheel Material	Nodular iron				

*960 lbs. with 2.2 Liter diesel. (a)2060 lbs with 5.7 Liter/350 V8; 2370 lbs with 7.4 Liter/454 V8. †1650 lbs on Astro/Safari.
August, 1984 General Motors Corporation Transmission & Driveline—Page 7

DRIVELINE DESIGN AND FEATURES

Hotchkiss drive is featured on all GM trucks equipped with single rear axle and the standard leaf spring rear suspension. Driveline serves only to transmit power between transmission and rear axle. Rear springs cushion the driving and braking forces at the rear axle for smooth operation. Hotchkiss drive keeps chassis weight down and provides efficient power transfer in all types of truck service.


Drivelines for GM trucks are engineered for reserve torque capacity, accurate balance, high rigidity and resistance to vibration.

Propeller shafts are made of smooth-wall steel tube. Length and tube diameters are proportioned for high rigidity to minimize flexing or "whip".

Universal joints are efficient needle bearing type. Trunnions are drop-forged and hardened for wear resistance and long life.

Center bearings, standard on many models, divide driveline into short, rigid propeller shafts. Rubber encased mounting minimizes transfer of vibrations.

Slip yoke adjusts length of driveline to match normal movement of rear axle over bumps, frees driveline of end stresses.

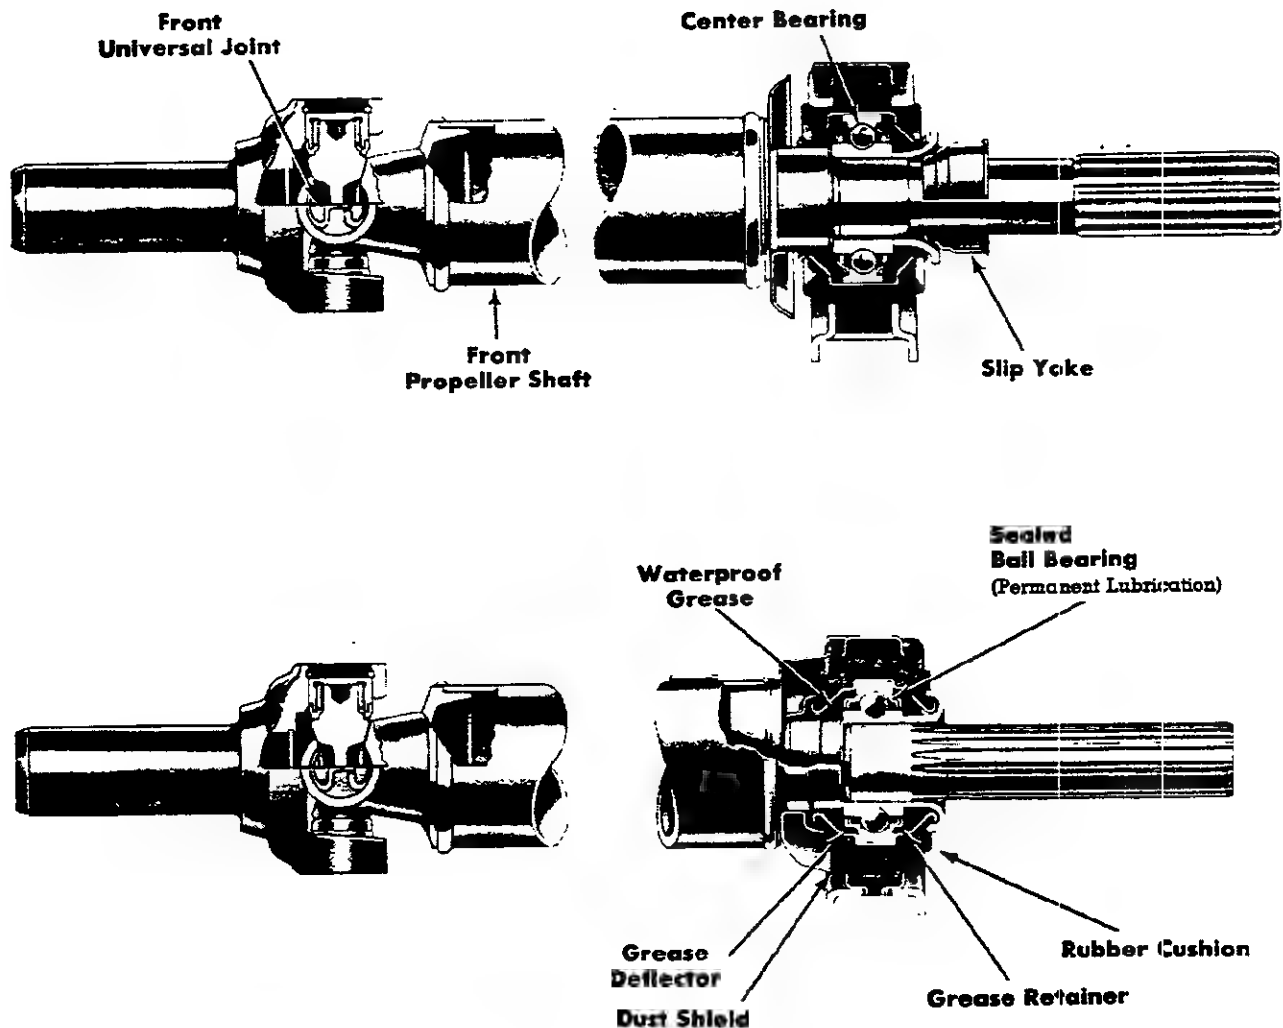

Universal Joint

Low-friction universal joints provide reserve torque capacity and efficient transfer of driving force to rear axle.

Center Bearing

Rubber-encased center bearing isolates propeller shafts, reduces transfer of possible vibrations on all models equipped with multiple propeller shafts.

DRIVELINE

SPECIFICATIONS

The propeller shaft and universal joint specifications shown below are based on Models with Standard Equipment Only. If optional equipment (engine, transmission, transfer case, rear axle) is ordered, different combinations of propeller shafts and universal

joints are provided to make up the driveline. These additional combinations are not described in the Data Book. If specifications for these combinations are necessary, they may be obtained through the Zone Office.

Model	Engine Used	Propeller Shafts						Universal Joints					
		No. Used	Front or Single	Diameter (in)			No. Used	Series					
				Front Axle to Trans. Case	Rear Axle to Trans. Case	Rear		1	2	3	4	5	6
M10905/06	Four/Six	1	3.50				2	S44	1355				
S10516	Four/Six	1	3.50				2	S44	S44				
S10603	Four/Six	1	3.50				2	S44	S44				
S10803	Four/Six	2	2.75			2.75	3	S44	S44	S44			
S10653	Four/Six	2	2.75			2.75	3	S44	S44	S44			
T10516	Four/Six	2		2.00	2.75		4	P23H	P23H	S44	S44		
T10603	Four/Six	2		2.00	3.50		4	P23H	P23H	S44	S44		
T10803	Four/Six	2		2.00	3.50		4	P23H	P23H	S44	S44		
T10653	Four/Six	3		2.00	2.75	2.75	5	P23H	P23H	S44	S44	S44	
C10703	Six/V8	1	3.50				2	S44	S44				
C10903	Six/V8	2	2.75			2.75	3	S44	S44	S44			
C109 Suburban	V8	1	3.50				2	S44	S44				
C20903	Six/V8	2	2.75			2.75	3	1355	1355	1355			
C209 Suburban	V8	2	2.75			2.75	3	1355	1355	1355			
C20943 Bonus Cab	Six/V8	2	3.50			3.50	3	1355	1355	1355			
C20943 Crew Cab	Six/V8	2	3.50			3.50	3	1355	1355	1355			
C309-310 (exc. 43)	Six/V8	2	2.75			2.75	3	1355	1355	1355			
C314	Six/V8	2	3.00			3.50	3	1355	1355	1355			
C30943 Bonus Cab	Six/V8	2	3.50			3.50	3	1355	1355	1355			
C30943 Crew Cab	Six/V8	2	3.50			3.50	3	1355	1355	1355			
K105 Blazer/Jimmy	V8	2		2.00	2.75		4	1315	S44	1355	1355		
K107	Six/V8	2		2.00	2.75		4	1315	S44	S44	S44		
K10903	Six/V8	2		2.00	3.50		4	1315	S44	S44	S44		
K109 Suburban	V8	2		2.00	3.50		4	1315	S44	S44	S44		
K20903	Six/V8	2		2.00	3.50		4	1315	S44	1355	1355		
K209 Suburban	V8	2		2.00	3.50		4	1315	S44	1355	1355		
K30903	Six/V8	2		2.00	4.00		4	1315	S44	1355	1355		
K30943	Six/V8	3		2.00	3.00*		6	1315	S44	1355	1355	1355	1355
K310	Six/V8	3		2.00	3.00*		6	1315	S44	1355	1355	1355	1355
K314	Six/V8	3		2.00	3.00*		6	1315	S44	1355	1355	1355	1355
G110-210	Six/V8	1	3.50				2	S44	S44				
G113-213	Six/V8	2	2.75			2.75	3	S44	S44	S44			
G313-316	Six/V8	2	2.75			2.75	3	S44	1355	1355			
P208-210	Six/V8	2	2.75			2.75	3	1355	1355	1355			
P308-311-314 Motor Home	V8	2	3.00			2.75	3	1355	1355	1355			
P318 Motor Home	V8	2	3.50			3.50	3	1410	1355	1410			
P308-310	Six/V8	2	2.75			2.75	3	1355	1355	1355			
P314	Six/V8	2	3.00			3.50	3	1355	1355	1355			
P318 (Except Motor Home)	Six/V8	3	3.00			2.75▲	4	1355	1355	1355	1355		

*2 propshafts used between the rear axle and the transfer case.

▲2 propshafts used between the rear axle and the transmission; one 2.75" (rear) and one 3.00" (intermediate).

POWER TAKE-OFF EQUIPMENT

AVAILABLE ONLY FROM BODY AND EQUIPMENT COMPANIES

Power take-offs may be installed on the sides (or tops in some cases) of the transmission. Standard SAE 6-bolt or 8-bolt power take-off openings are provided to accommodate a variety of PTO's. Consult the Transmission section for location and number of openings on the transmission you desire to fit.

Power take-offs may be controlled by a shift wire or lever, and may be operated with the transmission in neutral or when the

truck is in motion. Speed of the PTO shaft is determined by the engine rpm and the gear ratio between the transmission PTO drive gear and driven gear.

Consult the special equipment distributor to select the power take-off of correct capacity and type to meet operating requirements of each application.

TRANSMISSION & DRIVELINE

VALUE FEATURES

Transmissions

- Optional 3-speed automatic transmission provides greater performance, smoothness and flexibility with 3-element torque converter. Improves fuel economy and performance by more efficient use of engine torque.
- Standard 3-speed and optional 4-speed transmissions (standard on Astro/Safari) feature fully synchronized forward speeds for better vehicle flexibility and convenience.
- The 700R4 4-speed automatic transmission with overdrive is available for all CK10/1500 models and CK20/2500 models below 8500-lbs GVWR and on CK20/2500 models with 8600-lb GVWR and LT9 or 6.2 Liter diesel engine. It is standard on C10/1500 Suburban models. Featuring a mechanical locking converter clutch and a fourth-speed overdrive ratio, it offers additional fuel savings over one to one drive transmissions.
- The four-speed manual transmission with overdrive is available on C-K10/1500 Pickup models with gasoline engines, and on C-K10/1500 models equipped with the 6.2 Liter diesel engine.
- Optional 5-speed manual transmission with overdrive is available on Astro/Safari and S-10/15 models (except Chassis-Cabs).
- A 3-mode electronic speed control unit provides cruise, resume, tap-up, tap-down (1 mph increments), or accelerate in response to driver selection.

FULL-SIZE 4-WHEEL DRIVE VALUE FEATURES

- Automatic locking front hubs on all full-size 4-wheel-drive models.
- Lightweight aluminum transfer case on all K10/1500-20/2500 4-wheel-drive models with gear synchronizers for easy shifting.

Minimum exposure of running gear

- Transmission, transfer case and drive shafts extend only slightly below body for clean appearance.

Low silhouette, high ground clearance


- Transfer case mounted directly to transmission.
- Seven inches of ground clearance.
- Low center of gravity.
- Entry heights range from 21.7" to 25.5" depending on vehicle suspension and tire size.

1985 GENERAL MOTORS CORPORATION

INFORMATION REGARDING

CONSUMER INFORMATION TRUCK-CAMPER LOADING

PUBLISHED MAY, 1984

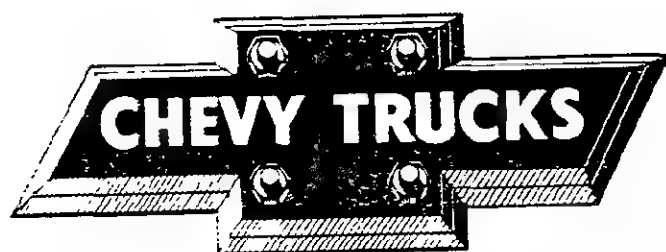

CHEVROLET MOTOR DIVISION
GENERAL MOTORS CORPORATION
WARREN MICHIGAN 48090



GMC TRUCK & COACH OPERATIONS
GENERAL MOTORS CORPORATION
PONTIAC, MICHIGAN 48058

1985 GENERAL MOTORS TRUCKS

Consumer Information

Truck - Camper Loading

CONSUMER INFORMATION REGULATION 575.103 issued by the National Highway Traffic Safety Administration requires manufacturers of trucks capable of accommodating slide-in camper bodies to provide information concerning proper load and proper load distribution in truck-camper applications.

This Consumer Information booklet is designed to provide basic information relating to load capabilities of 1985 General Motors Truck models which are adaptable to slide-in camper applications. Information contained herein is applicable to the truck buyer that already owns a 1985 General Motors Truck or the prospective truck purchaser.

See the General Motors Corporation Light-Duty Truck Facts Data Book for additional information required to completely spec out your vehicle for the proper slide-in camper accommodation.


The Regulation also provides that proper truck-camper loading information is to be maintained in truck dealerships and be made available to all prospects on request. This booklet relates to the 1985 General Motors Truck models recommended for slide-in camper applications and is to be used as a consumer information piece.

Product specifications or data contained herein may change periodically. When a revision of this booklet is supplied to truck dealers, it is the dealers' responsibility to make the revised information available to the public.

All illustrations and specifications contained in this literature are based on the latest product information available at the time of publication approval. The right is reserved to make changes at any time in prices, colors, materials, equipment, specifications and models, and also to discontinue models.

TRUCK - CAMPER LOADING

Loading Instructions—When the truck is used to carry a slide-in camper, the total cargo load of the truck consists of the manufacturer's camper weight figure, the weight of installed additional camper equipment not included in the manufacturer's camper weight figure, the weight of camper cargo and the weight of passengers in the camper. The total cargo load should not exceed the truck's cargo weight rating (CWR) and the camper's center of gravity should fall within the truck's recommended center of gravity zone when installed.

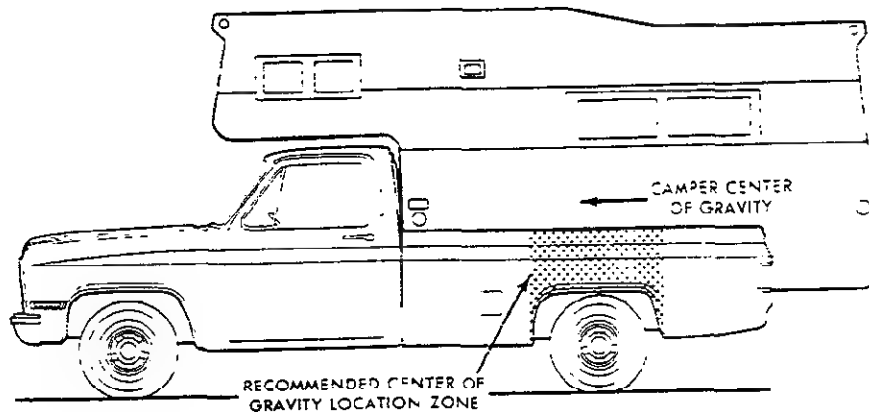

Any accessories or other equipment added to this vehicle after final date of manufacture, must be weighed or have their weight determined, and the weight deducted from the prescribed cargo weight rating (CWR) of this vehicle. This may decrease the permissible longitudinal zone of the center of gravity for this vehicle.

The longitudinal center of gravity zone has been determined for the full cargo weight rating of this truck. If a slide-in camper has a total weight less than the cargo weight rating (CWR), the permissible longitudinal zone of the center of gravity may be larger. However, individual axle loads should not exceed either of the gross axle weight ratings (GAWR).

Secure loose items to prevent weight shifts that could affect the balance of your vehicle. When the truck/camper is loaded, drive to a scale and weigh on the front and on the rear wheels separately to determine the axle loads. Individual axle loads should not exceed either of the gross axle weight ratings (GAWR). The total of the axle loads should not exceed the gross vehicle weight rating (GVWR). These ratings are given on the vehicle identification plate and on the vehicle certification label which are located on the left side of the vehicle, normally on the door latch post or door edge next to the driver. If weight ratings are exceeded, move or remove items to bring all weights below the ratings.

CAUTION: The longitudinal center of gravity is only one of the many factors which may affect the overall performance of a vehicle, including handling, steering and braking. The recommended longitudinal limits for the camper's center of gravity are based on the assumption that the vehicle will be operated with reasonable prudence in light of all of the existing conditions. Failure to do so could result in unsatisfactory vehicle performance and could make the vehicle unsafe to operate.


In this connection, refer to any recommendations by the slide-in camper manufacturer regarding installation and loading of the camper.

TRUCK-CAMPER LOADING

Consumer Information Regulation 575.103 requires manufacturers of trucks that would accommodate slide-in campers to specify the vehicle's Cargo Weight Rating (CWR) and the longitudinal limits within which the center of gravity for the cargo weight rating should be located.

Cargo Weight Rating (CWR)—The cargo weight rating of a vehicle means the value specified by the manufacturer as the cargo-carrying capacity of a vehicle, in pounds, exclusive of (minus) the weight of occupants, computed as 150 pounds times the number of designated seating positions.

Longitudinal Center of Gravity Zone for CWR (CG)—The forward limit of the recommended CG Zone is determined by the application of dimension "A" measured in inches from the rear of the truck bed. The rearward limit of the recommended CG Zone is established by application of dimension "B", also measured in inches from the rear of the truck bed. The recommended CG Zone lies between these points.

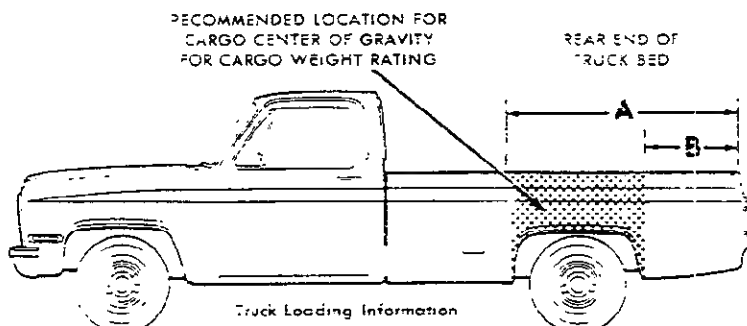

Model _____

Calculated
Cargo Weight Rating _____

Dimension A _____

Dimension B _____

Limitations on Recommended CG Zones

FORWARD LIMIT

- (1) Must not extend beyond the inside surface (dimension IL shown on line drawings) of the pickup box.
- (2) Must not exceed the front gross axle weight rating (GAWR).

REARWARD LIMIT

- (1) Must be no farther rearward than the inside surface (dimension IL shown on line drawing) of the pickup box.
- (2) Must not exceed the gross axle weight rating on the rear axle.
- (3) On S/T-10/15 and Series C/K-10/1500 trucks the rear axle loading is limited to 62% of the vehicle's Gross Vehicle Weight Rating (GVWR).
- (4) On Series C/K-20/2500 and C/K-30/3500 trucks the rear axle loading is limited to 70% of the vehicle's Gross Vehicle Weight Rating (GVWR).

Vehicle (CG) Identification—All General Motors Corporation trucks that may be suitable for carrying a slide-in camper incorporate a Truck-Camper Loading information label located on the inside of the glove box door on C/K models, or on the trailing edge of the driver's door on S/T-10/15 models. The vehicle identification number (VIN), the as-manufactured cargo weight rating (CWR) of that vehicle plus the CG limits of dimension "A" and "B" for that vehicle in inches are included.

Vehicle and Truck-Camper Loading are also discussed at length in the first few pages of the Vehicle Owner's Manual.

TRUCK-CAMPER LOADING

DEFINITION OF TERMS

For the purposes of calculating Truck-Camper Loading in this book listed below are some common terms and abbreviations.

Cargo Weight Rating (CWR)—means the value specified by the vehicle manufacturer as the cargo-carrying capacity, in pounds, of a vehicle exclusive of (minus) the weight of occupants computed as 150 pounds times the number of designated seating positions.

Center of Gravity (CG)—Point where the mass of a body is concentrated and if suspended at that point would balance front and rear.

Curb Weight—Weight of a vehicle without driver, passengers or cargo but including fuel, coolant and other items of standard equipment.

Dimension A & B—Center of Gravity (CG) zone.

Gross Vehicle Weight Rating or "GVWR" means the value specified by the manufacturer as the loaded weight of a single vehicle.

Gross Axle Weight Rating or "GAWR" means the value specified by the vehicle manufacturer as the load-carrying capacity of a single axle system measured at the tire-ground interfaces.

Model Weight—Weight of the vehicle with all items of standard equipment, 150 pounds per passenger in each designated seating position and maximum capacity of fuel, oil and coolant.

Payload Rating—is the maximum allowable load (including the weight of the driver and all occupants) that the vehicle can carry based on all factory installed equipment on the vehicle.

Slide-in Camper—means a camper having a roof, floor, and sides, designed to be mounted on and removable from the cargo area of a truck by the user.

Weight Distribution—The amount of a vehicle's weight that rests on each axle.

Wheelbase (WB)—The distance from the center line of the front axle to the center line of the rear axle.

LIMITATIONS

The following General Motors truck models are not recommended for slide-in camper applications:

- El Camino/Caballero—all models
- Any pickup model with a cargo weight rating of less than 500 lbs.

A statement is imprinted on the Truck-Camper Loading information label which states that the vehicle should not be used to carry a slide-in camper.

- S, T-10/15 Pickup with 1000-lb payload
- S, T-10/15 Pickup with 138 3" WB
- S, T-10/15 Extended Cab Pickup

Note: C10/1500 Pickups should not be used for larger, cab-over-type slide-in campers.

TRUCK - CAMPER LOADING

C/K PICKUPS

INSTRUCTIONS

VEHICLE SELECTION AND WEIGHT ANALYSIS

- 1 From the model selector in the C/K Pickup section of the General Motors Light-Duty Truck Facts/Data Book, select the pickup truck model you desire. Refer to the GVWR selector for the selected model. Select the GVWR you require and note the minimum tire size and chassis equipment required for that GVWR. To approximate the GVWR you require, add your loaded camper weight to the vehicle model weight shown on the appropriate model, weight and dimension page of the Facts/Data Book. Record this information on the C/K Pickup computation sheet, page 7.
 - 2 Record the front and rear model weights of your selected vehicle.
 - 3 In the appropriate sections of the computation sheet, record the chassis equipment you desire, tires, springs, stabilizer bars. Keep in mind that you must select suspension equipment having load capacities equal to or greater than those of the minimum equipment required for your selected GVW rating. (The capacities of standard springs are shown on the standard specification pages.) Record the front and rear weight of each piece of equipment and the load capacity of the springs and tires in the appropriate columns.
 - 4 List all other factory-installed options you desire with their front and rear weights on the C/K Pickup computation sheet.
 - 5 Total the front and rear weights of vehicle model and options to arrive at the total front and rear weight of the vehicle •
 - 6 Subtract the total front and rear weights of the vehicle from the GVWR to arrive at the cargo weight rating of your truck •
 - 7a To determine the front gross axle weight rating (GAWR) of your vehicle, select the lowest of the front tire or front spring load capacities and multiply by 2. This will be the front GAWR.
 - 7b The rear GAWR is computed in the same manner. Select the lowest of the rear tire or rear spring load capacities and multiply by 2.
 - 8 Proceed to calculate the center of gravity location using front and rear GAWRs, cargo weight rating, and front and rear weight of truck as determined above. Record this information on the C/K Pickup computation sheet.
- The addition of any dealer-installed or other accessories will reduce the cargo carrying capacity by the weight of the equipment installed.
- If your vehicle is available, drive to a scale and weigh on the front end and on the rear wheels separately to determine the axle loads. You will then be able to use your actual cargo weight rating and not have to add the 50# for all models.

TRUCK-CAMPER LOADING C/K PICKUPS **WORKSHEET-CARGO WEIGHT RATING**

1 **Model GVWR** _____

2 **Model Weights:**

FRONT _____ **REAR** _____

3 **Chassis Equipment selected
to meet GVWR requirements:**

Load Capacity*

Tires Front:	_____	_____	_____
Rear	_____	_____	_____
Springs Front	_____	_____	_____
Rear	_____	_____	_____

4 **Other factory-installed options:**

.....	_____	_____
.....	_____	_____
.....	_____	_____
.....	_____	_____
.....	_____	_____
.....	_____	_____
.....	_____	_____
.....	_____	_____
.....	_____	_____
.....	_____	_____

TOTALS _____

5 **Front and Rear Weight:**

5a Vehicle sub-total weight (add front and rear weight)	_____
5b Add 50 lbs for all models	-50
5c Adjusted total vehicle weight:	_____

6 **Vehicle GVWR:**

Adjusted total vehicle weight	_____
Cargo Weight Rating	_____

Record on page 4.

7 **Gross Axle Weight Rating:**

	LOAD CAPACITY		AXLE CAPACITY	GROSS AXLE WEIGHT RATING (LOWEST VALUE OF AXLE CAPACITIES)
A Front:				
1 Springs	_____ 2=	_____		
2 Tires	_____ 2=	_____		
B Rear				
1 Springs	_____ 2=	_____		
2 Tires	_____ 2=	_____		

* Load capacity is the rating in pounds for each tire, spring, etc.

TRUCK-CAMPER LOADING

S/T-10/15 MODELS

INSTRUCTIONS

VEHICLE SELECTION AND WEIGHT ANALYSIS

1. You must order as a minimum the RPO C3A option (500 lbs. Payload Package) on a S/T10/15 (1.79" WB) model, if you intend on using a slide-in camper on your S/T-10/15 Pickup Truck.
2. From the S Pickup section of the General Motors Light-Duty Truck Facts Data Book, record the front and rear model weights of your vehicle on the S/T-10/15 computation sheet, page 9.
3. List all the factory-installed options including tires you desire with their front and rear weights on the S/T-10/15 Pickup computation sheet.
4. Total the front and rear weights of vehicle model and options to arrive at the total front and rear weight of the vehicle*.
5. Add the cargo weight rating (1050 lbs)† to the total front and rear weights of the vehicle to arrive at the vehicle GVWR.
6. Determine the Gross Axle Weight Ratings (GAWRs) of your selected vehicle as follows:
 - a) Front GAWR is shown on computation sheet.
 - b) Rear GAWR is computed by multiplying the load capacity of the tire selected by 2 and comparing to the value specified for rear axle rating. Select the lowest value of either the rear tire or rear axle capacity.
7. Proceed to calculate the center of gravity location using front and rear GAWRs, Cargo Weight Rating, and front and rear weight of truck as determined above. Record this information on the S/T-10/15 Pickup computation sheet.

*If your vehicle is available, drive to a scale and weigh on the front and on the rear wheels separately to determine the axle loads. You will then be able to use your actual cargo weight and not have to use the 1050 lbs for the S/T truck.

†With RPO C3A Bucket Seats, Cargo Weight Rating is 1000 lbs.

Note: The addition of any dealer-installed or other accessories will reduce the cargo-carrying capacity by the weight of the equipment installed.

TRUCK - CAMPER LOADING

MODEL CODES AND DIMENSIONS

SERIES	MODEL NUMBER	PICKUP BOX LENGTH	PICKUP STYLE	WB	"C"
--------	--------------	-------------------	--------------	----	-----

2-WHEEL-DRIVE REGULAR CAB MODELS

S-10/15	S10603	7'	Fleetside/Wideside (E63)	117.9"	42.40'
C10/1500	C10703	5'-2"	Fleetside/Wideside (E63)	117.5"	38.35'
			Stepside/Fenderside (E62)	117.5"	37.95'
C20/2500	C20903	8'	Fleetside/Wideside (E63)	131.5"	44.25'
			Stepside/Fenderside (E62)	131.5"	43.85'
C30/3500	C30903	8'	Fleetside/Wideside (E63)	131.5"	44.25'
			Stepside/Fenderside (E62)	131.5"	43.85'

4-WHEEL-DRIVE REGULAR CAB MODELS

T-10/15	T10603	7'	Fleetside/Wideside (E63)	117.9"	42.40"
K10/1500	K10703	5'-2"	Fleetside/Wideside (E63)	117.5"	37.95"
			Stepside/Fenderside (E62)	117.5"	38.32"
K20/2500	K20903	8'	Fleetside/Wideside (E63)	131.5"	43.85"
			Stepside/Fenderside (E62)	131.5"	44.22"
K30/3500	K30903	8'	Fleetside/Wideside (E63)	131.5"	43.85"


BONUS CAB MODELS

C20/2500	C20943	8'	Fleetside/Wideside (E63 & YG4)	164.5"	44.22"
C30/3500	C30943	8'	Fleetside/Wideside (E63 & YG4)	164.5"	44.22"
K30/3500	K30943	8'	Fleetside/Wideside (E63 & YG4)	164.5"	44.22"


CREW CAB MODELS

C20/2500	C20943	8'	Fleetside/Wideside (E63 & AS3)	164.5"	44.22"
C30/3500	C30943	8'	Fleetside/Wideside (E63 & AS3)	164.5"	44.22"
K30/3500	K30943	8'	Fleetside/Wideside (E63 & AS3)	164.5"	44.22"


FLEETSIDE/WIDESIDE

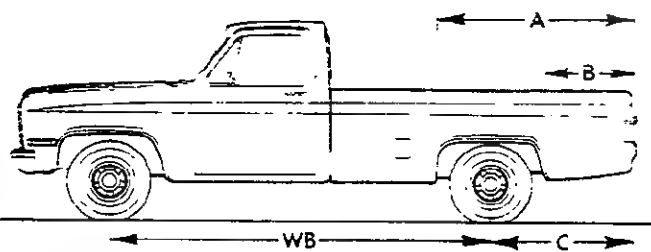


STEPSIDE/FENDERSIDE

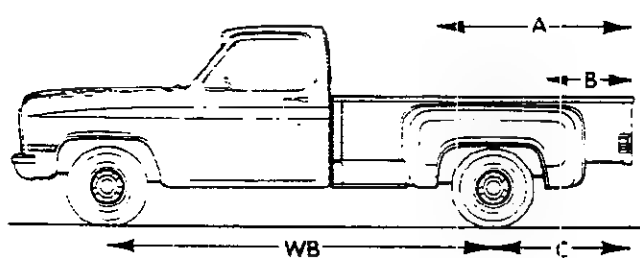

BONUS CAB AND CREW CAB

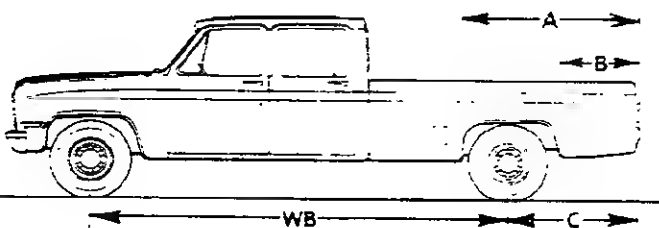

S/T-10/15 PICKUP

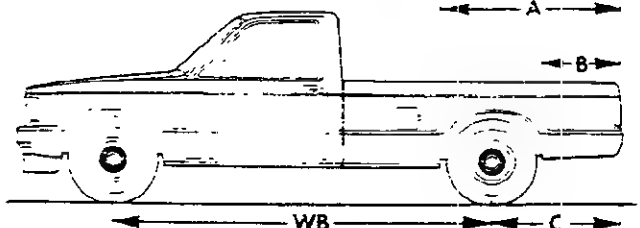

TRUCK-CAMPER LOADING

CALCULATIONS TO DETERMINE FORWARD (A) AND REARWARD (B) LOCATION OF CENTER OF GRAVITY FOR CARGO WEIGHT RATING

Calculations for Dimension A

$$A = \frac{\text{Front GAWR} - 1.05 \times \text{Front Weight of Truck}}{\text{Cargo Weight Rating}} \times \text{W.B.} - C$$

Enter Front GAWR _____

Subtract Front Weight of Truck x 1.05 _____

Answer _____

Divide Answer by Cargo Weight _____

Answer _____

Multiply Answer by Wheelbase _____

(See Chart on Page 10)

Answer _____

Add C Dimension to Answer _____

(See Chart on Page 10)

Dimension A = _____

Note: If "A" is greater than pickup box length, use box length for "A" dimension.

Calculations for Dimension B

$$B = 1 - \frac{\text{Rear GAWR} - 1.1 \times \text{Rear Weight of Truck}}{\text{Cargo Weight Rating}} \times \text{W.B.} \div C$$

Enter Rear GAWR _____

Subtract Rear Weight of Truck x 1.1 _____

Answer _____

Divide Answer by Cargo Weight _____

Answer _____

Subtract Answer from 1.000 _____

Multiply Answer by Wheelbase _____


Answer _____

Add C Dimension to Answer _____

Dimension B = _____

Note: If "B" dimension is negative, use 0 (zero) for "B" dimension.

Record dimension A and B on page 3.

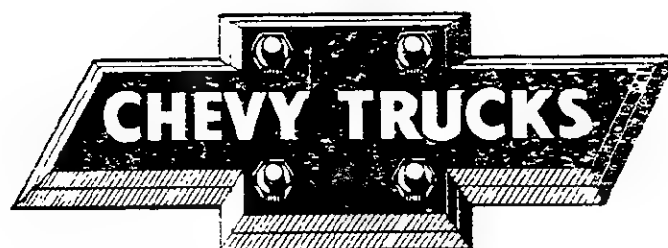

CHEVROLET MOTOR DIVISION
GENERAL MOTORS CORPORATION
WARREN, MICHIGAN 48090



GMC TRUCK & COACH OPERATIONS
GENERAL MOTORS CORPORATION
PONTIAC MICHIGAN 48058




AVANTI

1986 Chevrolet



CHEVROLET

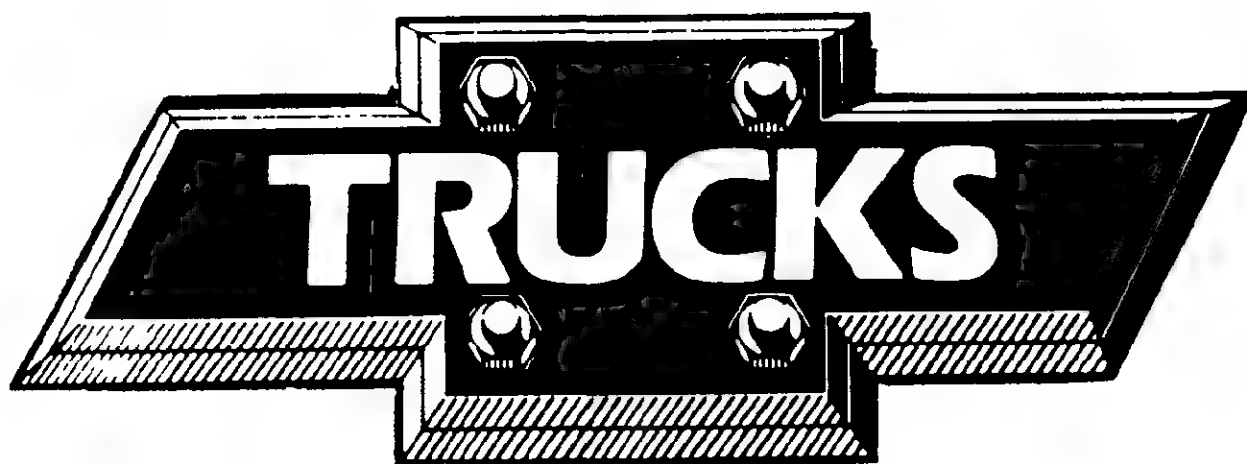

1986



2

3

C/K PICKUP


PICKUP MODEL SELECTOR

1986

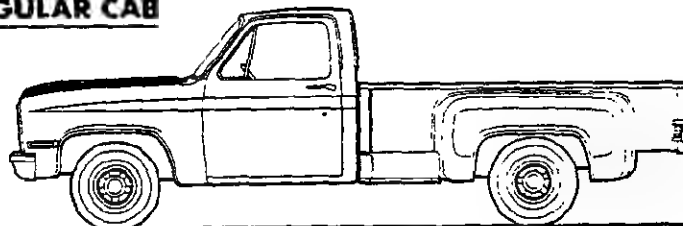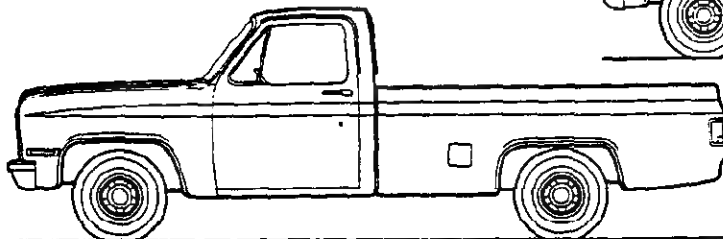REGULAR CABFLEETSIDE/WIDESIDESTEPSIDE/FENDERSIDE

SERIES	MODEL NUMBER		BODY ORDERING CODE			
			GASOLINE MODELS		DIESEL MODELS	
	6½' BOX	8' BOX	FLEETSIDE/ WIDESIDE	STEPSIDE/ FENDERSIDE	FLEETSIDE/ WIDESIDE	STEPSIDE/ FENDERSIDE
C10/1500	C10703	C10903	E63	*E62	E63/B3J	*E62/B3J
C20/2500	—	C20903	E63	E62	E63/B3J	E62/B3J
C20/2500/C6P	—	C20903	E63/C6P	E62/C6P	E63/C6P/B3J	E62/C6P/B3J
C30/3500	—	C30903	E63	E62	E63/B3J	E62/B3J
K10/1500 (4X4)	K10703	K10903	E63	*E62	E63/B3J	*E62/B3J
K20/2500 (4X4)	—	K20903	E63	E62	E63/B3J	E62/B3J
K20/2500/C6P (4X4)	—	K20903	E63/C6P	E62/C6P	E63/C6P/B3J	E62/C6P/B3J
K30/3500 (4X4)	—	K30903	E63	—	E63/B3J	—

*Available on C/K10703 models only.

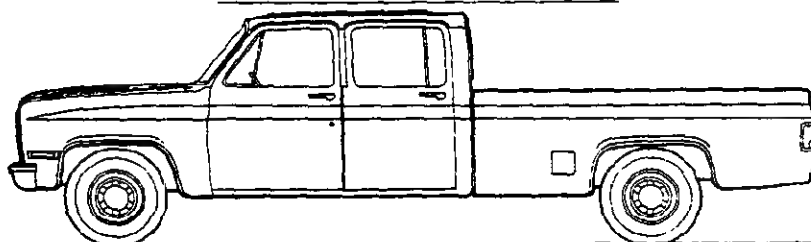BONUS CAB AND CREW CAB

SERIES	MODEL NUMBER		BODY ORDERING CODE	
			GASOLINE MODELS	DIESEL MODELS
	BONUS CAB	CREW CAB	8' FLEETSIDE/ WIDESIDE BOX	8' FLEETSIDE/ WIDESIDE BOX
C20/2500	C20943	—	E63/YG4	E63/YG4/B3J
	—	C20943	E63/AS3	E63/AS3/B3J
C30/3500	C30943	—	E63/YG4	E63/YG4/B3J
	—	C30943	E63/AS3	E63/AS3/B3J
K30/3500 (4X4)	K30943	—	E63/YG4	E63/YG4/B3J
	—	K30943	E63/AS3	E63/AS3/B3J

GASOLINE**C/K PICKUP—2-Wheel Drive****C10/1500 REGULAR CABS****STANDARD SPECIFICATIONS**

(See Gray Tab Section for Specification Details)

Series	C10/1500
Engine Base Equip. Clutch Air Filter Oil Filter Exhaust System Emission Control Systems	4.3 Liter, 262 4-bbl V6 11"; 124 sq. in. Oiled-paper Element Throwaway Type Single; Aluminized See Engine & Cooling Section for specific model applications
Suspension, Front Capacity Springs @ Ground Shock Absorbers	Independent; Coil Springs 2950 lb. 1475 lb. ea. 25mm dia.
Suspension, Rear Axle Capacity Axle Ratio Springs @ Ground Shock Absorbers	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs 3750 lb. 2.73 1550 lb ea. 25mm dia.
Brakes Front Rear Booster Parking	Hydraulic; Self-adjusting Disc; 11.86" Rotor Drum; 11" x 2" — Cable to Rear Wheels
Electrical Battery—Freedom Type — Reserve Capacity Delcotron Generator	12 Volt; Negative Ground 405 CCA ♦ @ 0°F. 75 min. @ 80°F. 37 amp.
Frame Section Modulus	Carbon Steel; 36,39,000 psi 3.10
Fuel Tank (nominal capacity) —117.5" WB —131.5" WB	16 gal. 20 gal.
Steering Gear Type Linkage	Manual; Recirculating Ball Gear Parallelogram
Transmission Shift Location	Fully Synchronized 3-Speed Manual Steering Column
Tires	(5) P195/75R15 All Seasons Steel Belted Radial
Wheels	(5) Disc 15" x 6"

♦ CCA-Cold Cranking Amps

C/K PICKUP—2-Wheel Drive

C10/1500 REGULAR CABS

STANDARD SPECIFICATIONS

(See Gray Tab Section for Specification Details)

DIESEL

Series	★C10/1500
Engine Base Equip. Clutch Air Filter Oil Filter Oil Cooler Exhaust System Emission Control Systems	6.2 Liter, 379 Cu. In. V8 Diesel 12"; 150 sq. in. Poly-wrapped, Oiled-paper Element Throwaway Type Standard Dual; Aluminized See Engine & Cooling Section for specific model applications
Suspension, Front Capacity Springs @ Ground Shock Absorbers	Independent; Coil Springs 3400 lb. 1700 lb. ea. 25mm dia.
Suspension, Rear Axle Capacity Axle Ratio Springs @ Ground Shock Absorbers	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs 3750 lb. 3.08 1550 lb. ea. 25mm dia.
Brakes Front Rear Booster Parking	Hydraulic; Self-adjusting Disc; 11.86" Rotor Drum; 11" x 2" Hydraulic Power Cable to Rear Wheels
Electrical Battery—Freedom Type —Reserve Capacity Delcotron Generator Engine Block Heater	12 Volt; Negative Ground Two; 550 CCA ♦ ea. @ 0°F. 115 min. ea. @ 80°F. 66 amp. 600 watts, 120 volts
Frame Section Modulus	Carbon Steel; 36,39,000 psi 3.10
Fuel Tank (nominal capacity) —117.5" WB —131.5" WB	16 gal. 20 gal.
Steering Gear Type	Integral Power
Transmission Shift Location	4-Speed Manual with Overdrive Floor
Tires	(5) P205/75R15 All Seasons Steel Belted Radial
Wheels	(5) Disc 15" x 6"

★ Not available for registration in State of California

♦ CCA-Cold Cranking Amps

GASOLINE**C/K PICKUP—2-Wheel Drive****C20/2500 REGULAR CABS****C20/2500 BONUS CABS & CREW CABS****STANDARD SPECIFICATIONS**

(See Gray Tab Section for Specification Details)

Series	C20/2500 Regular Cab	C20/2500/C6P Regular Cab	C20/2500 Bonus/Crew Cab
Engine	4.3 Liter, 262 4-bbl. V6		
Base Equip.	4.8 Liter, 292 1-bbl. V6		
Clutch	11"; 124 sq. in.		
Air Filter	Oiled-paper Element		
Oil Filter	Throwaway Type		
Exhaust System	Single; Aluminized	Single; Stainless Steel	
Emission Control Systems	See Engine & Cooling Section for specific model applications		
Suspension, Front	Independent; Coil Springs		
Capacity	3800 lb.		
Springs @ Ground	1750 lb. ea.	1900 lb. ea.	
Shock Absorbers	25mm dia.	32mm dia.	
Stabilizer Bar	—	1.06" dia.	
Suspension, Rear	Salsbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs		
Axle Capacity	5700 lb.	6000 lb.	7500 lb.
Axle Ratio	3.42	4.10	4.10
Springs @ Ground	2000 lb. ea.	3000 lb. ea.	3000 lb. ea.
Shock Absorbers	25mm dia.	32mm dia.	32mm dia.
Brakes	Hydraulic; Self-adjusting		
Front	Disc; 12.5" Rotor		
Rear	Drum; 11.15" x 2.75"	Drum; 13" x 2.5"	
Booster	Dual Diaphragm		
Parking	Cable to Rear Wheels		
Electrical	12 Volt; Negative Ground		
Battery—Freedom Type	405 CCA ♦ @ 0°F.		
—Reserve Capacity	75 min. @ 80°F.		
Delcotron Generator	37 amp.		
Frame	Carbon Steel; 36,-39,000 psi		
Section Modulus	3.57	4.53	7.33
Fuel Tank (nominal capacity)	20 gal.		
Steering Gear Type	Manual; Recirculating Ball Gear		
Linkage	Parallelogram		
Transmission	4-Speed Manual (SM 465)		
Shift Location	Floor		
Tires	(4) LT 215/85R16C (6PR)	Front: LT 235/85R16D (8PR) Rear: LT 235/85R16E (10PR)	
Wheels	(4) Disc		
Size	16" x 6.5"		

♦ CCA-Cold Cranking Amps

C/K PICKUP—2-Wheel Drive

DIESEL

C20/2500 REGULAR CABS

C20/2500 BONUS CABS & CREW CABS

STANDARD SPECIFICATIONS

(See Gray Tab Section for Specification Details)

Series	★C20/2500 Regular Cab	C20/2500/C6P Regular Cab	C20/2500 Bonus/Crew Cab		
Engine Base Equip. Clutch Air Filter Oil Filter Oil Cooler Exhaust System Emission Control Systems	6.2 Liter, 379 Cu. In V8 Diesel 12"; 150 sq. in. Poly-wrapped, Oiled-paper Element Throwaway Type Standard Dual; Aluminized See Engine & Cooling Section for specific model applications				
Suspension, Front Capacity Springs @ Ground Shock Absorbers Stabilizer Bar	Independent; Coil Springs 3800 lb. 1750 lb. ea. 25mm dia —			1900 lb. ea. 32mm dia. 1.06" dia.	
Suspension, Rear Axle Capacity Axle Ratio Springs, Main @ Ground Shock Absorbers	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs 5700 lb. 3.42 2000 lb. ea. 25mm dia.			6000 lb. 3.73 3000 lb. ea. 32mm dia.	7500 lb. 3.73 3000 lb. ea. 32mm dia.
Brakes Front Rear Booster Parking	Hydraulic; Self-adjusting Disc; 12.5" Rotor Drum; 11.15" x 2.75"			Drum; 13" x 2.5"	
Electrical Battery—Freedom Type —Reserve Capacity Delcotron Generator Engine Block Heater	12 Volt; Negative Ground Two: 550 CCA ♦ ea. @ 0°F. 115 min. ea. @ 80°F. 66 amp. 600 watts, 120 volts				
Frame Section Modulus	Carbon Steel; 36,-39,000 psi 3.57			4.53	7.33
Fuel Tank (nominal capacity)	20 gal.				
Steering Gear Type	Integral Power				
Transmission Shift Location	4-Speed Manual (SM 465) Floor				
Tires	(4) LT 215/85R16C (6PR)	Front: LT 235/85R16D (8PR) Rear: LT 235/85R16E (10PR)			
Wheels Size	(4) Disc 16" x 6.5"				

★ Not available for registration in State of California

♦ CCA-Cold Cranking Amps

GASOLINE**C/K PICKUP—2-Wheel Drive****C30/3500 REGULAR CABS
C30/3500 BONUS CABS & CREW CABS****STANDARD SPECIFICATIONS**

(See Gray Tab Section for Specification Details)

Series	C30/3500 Regular Cab	C30/3500 Bonus/Crew Cab
Engine	4.8 Liter, 292 1-bbl L6	
Base Equip.	11"; 124 sq. in.	
Clutch	Oiled-paper Element	
Air Filter	Throwaway type	
Oil Filter	Single; Stainless Steel	
Exhaust System	See Engine & Cooling Section for specific model applications	
Emission Control Systems		
Suspension, Front	Independent; Coil Springs	
Capacity	3800 lb.	4000 lb.
Springs @ Ground	1900 lb. ea.	2000 lb. ea.
Shock Absorbers	32mm	
Suspension, Rear	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs	
Axle Capacity	7500 lb.	
Axle Ratio	4.10	
Springs @ Ground	3500 lb. ea.	
Shock Absorbers	32mm dia.	
Brakes	Hydraulic, Self-adjusting	
Front	Disc; 12.5" rotor	
Rear	Drum; 13" x 3.5"	
Booster	Hydraulic Power	
Parking	Cable to Rear Wheels	
Electrical	12 Volt; Negative Ground	
Battery—Freedom Type	405 CCA ♦ @ 0°F.	
—Reserve Capacity	75 min. @ 80°F.	
Delcotron Generator	37 amp.	
Frame	Carbon Steel; 36,-39,000 psi	
Section Modulus	6.14	7.33
Fuel Tank (Nominal Capacity)	20 gal.	
Steering Gear Type	Manual; Recirculating Ball Gear	
Linkage	Parallelogram	
Transmission	4-Speed Manual (SM 465)	
Shift Location	Floor	
Tires—Front	(2) LT235/85R16D (8PR)	
—Rear	(2) LT235/85R16E (10PR)	
Wheels	(4) Disc	
Size	16" x 6.5"	

♦CCA-Cold Cranking Amps

C/K PICKUP—2-Wheel Drive

DIESEL

C30/3500 BONUS CABS & CREW CABS—C30/3500 REGULAR CABS

STANDARD SPECIFICATIONS

(See Gray Tab Section for Specification Details)

Series	C30/3500 Regular Cab	C30/3500 Bonus/Crew Cab
Engine	6.2 Liter, 379 Cu. In. V8 Diesel	
Base Equip.	12"; 150 sq. in.	
Clutch	Poly-wrapped, Oiled-paper Element	
Air Filter	Throwaway type	
Oil Filter	Standard	
Oil Cooler	Dual; Aluminized	
Exhaust System	See Engine & Cooling Section for specific model applications	
Emission Control Systems		
Suspension, Front	Independent; Coil Springs	
Capacity	3800 lb.	4000 lb.
Springs @ Ground	1900 lb. ea.	2000 lb. ea.
Shock Absorbers	32mm	
Suspension, Rear	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs	
Axle Capacity	7500 lb.	
Axle Ratio	4.10	
Springs @ Ground	3500 lb. ea.	
Shock Absorbers	32mm dia.	
Brakes	Hydraulic, Self-adjusting	
Front	Disc; 12.5" rotor	
Rear	Drum; 13" x 3.5"	
Booster	Hydraulic Power	
Parking	Cable to Rear Wheels	
Electrical	12 Volt; Negative Ground	
Battery—Freedom Type	Two; 550 CCA♦ ea. @ 0°F.	
—Reserve Capacity	115 min. ea. @ 80°F.	
Delcotron Generator	66 amp.	
Engine Oil Cooler	600 watts, 120 volts	
Frame	Carbon Steel; 36,-39,000 psi	
Section Modulus	6.14	7.33
Fuel Tank	20 gal.	
(Nominal Capacity)		
Steering Gear Type	Integral Power	
Transmission	4-Speed Manual (SM 465)	
Shift Location	Floor	
Tires—Front	(2) LT235/85R16D (8PR)	
—Rear	(2) LT235/85R16E (10PR)	
Wheels	(4) Disc	
Size	16" x 6.5"	

♦CCA-Cold Cranking Amps

GASOLINE

C/K PICKUP—4-Wheel Drive

K10/1500-20/2500 REGULAR CABS

STANDARD SPECIFICATIONS

(See Gray Tab Section for Specification Details)

Series	K10/1500	K20/2500	K20/2500/C6P
Engine			
Base Equip.	4.3 Liter, 262 4-bbl V6 11"; 124 sq. in.	5.7 Liter, 350 4-bbl V8 ■ 12"; 150 sq. in.	4.8 Liter, 292 1-bbl L6 11"; 124 sq. in.
Clutch	Oiled-paper Element Throwaway type		
Air Filter	Single; Aluminized		
Oil Filter			
Exhaust System	Single; Stainless Steel		
Emission Control System	See Engine & Cooling Section for specific model applications		
Suspension, Front	Salisbury Axle; Hypoid Drive; Single Stage Leaf Springs		
Capacity	3600 lb.	3800 lb.	3800 lb.
Axle Ratio	3.42	3.23	4.10
Springs @ Ground	1850 lb. ea.	1850 lb. ea.	1850 lb. ea.
Shock Absorbers	25mm dia.	25mm dia.	32mm dia.
Stabilizer Bar	1.25" dia.		
Hubs, Manual Locking	Standard		
Suspension, Rear	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs		
Axle Capacity	3750 lb.	5700 lb.	6000 lb.
Axle Ratio	3.42	3.23	4.10
Springs @ Ground	1875 lb. ea.	2000 lb. ea.	3000 lb. ea.
Shock Absorbers	25mm dia.	25mm dia.	32mm dia.
Brakes	Hydraulic—Self-adjusting		
Front	Disc; 11.86" Rotor	Disc; 12.5" Rotor	Disc; 12.5" Rotor
Rear	Drum; 11.15" x 2.75"	Drum; 11.15" x 2.75"	Drum; 13.0" x 2.5"
Booster	Dual Diaphragm Cable to Rear Wheels		
Parking			
Electrical	12 Volt; Negative Ground		
Battery—Freedom Type	405 CCA ♦ @ 0°F.		
—Reserve Capacity	75 min. @ 80°F.		
Delcotron Generator	37 amp.		
Frame	Carbon Steel; 36,-39,000 psi		
Section Modulus—117.5" WB	3.14	—	—
—131.5" WB	3.88	3.88	4.53
Fuel Tank (nominal capacity)			
—117.5" WB	16 gal.	—	—
—131.5" WB	20 gal.	20 gal.	20 gal.
Steering Gear Type	Integral Power		
Transmission	4-Speed Manual (SM 465)		
Shift Location	Floor		
Transfer Case	New Process 208 2-Speed Conventional		
Shift Lever	Single Lever		
Tires	(5) P235/75R15 All Seasons Steel Belted Radial	(4) LT215/85R16C (6PR)	Fr. (2) LT235/85R16D (8PR) Rr. (2) LT235/85R16E (10PR)
Wheels	(5) Disc 15" x 6"	(4) Disc 16" x 6.5"	(4) Disc 16" x 6.5"

■ Standard engine not available for registration in the State of California; see Power Teams Chart.

♦ CCA-Cold Cranking Amps

C/K PICKUP—4-Wheel Drive

K10/1500-20/2500 REGULAR CABS

DIESEL

STANDARD SPECIFICATIONS

(See Gray Tab Section for Specification Details)

Series	★K10/1500	★K20/2500	K20/2500/C6P
Engine Base Equip. Clutch Air Filter Oil Filter Oil Cooler Exhaust System Emission Control System	6.2 Liter, 379 Cu. In. V8 Diesel 12"; 150 sq. in. Poly-wrapped Oiled-paper Element Throwaway type Standard Dual; Aluminized See Engine & Cooling Section for specific model applications		
Suspension, Front	Salisbury Axle; Hypoid Drive; Single Stage Leaf Springs		
Capacity	3600 lb.	3800 lb.	3800 lb.
Axle Ratio	3.08	3.73	3.73
Springs @ Ground	1850 lb. ea.	1850 lb. ea.	1850 lb. ea.
Shock Absorbers	25mm dia.	25mm dia.	32mm dia.
Stabilizer Bar	1.25" dia.		
Hubs, Manual Locking	Standard		
Suspension, Rear	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs		
Axle Capacity	3750 lb.	5700 lb.	6000 lb.
Axle Ratio	3.08	3.73	3.73
Springs @ Ground	1875 lb. ea.	2000 lb. ea.	3000 lb. ea.
Shock Absorbers	25mm dia.	25mm dia.	32mm dia.
Brakes	Hydraulic—Self-adjusting		
Front	Disc; 11.86" Rotor	Disc; 12.5" Rotor	Disc; 12.5" Rotor
Rear	Drum; 11.15" x 2.75"	Drum; 11.15" x 2.75"	Drum; 13.0" x 2.5"
Booster	Hydraulic Power		
Parking	Cable to Rear Wheels		
Electrical Battery—Freedom Type .. —Reserve Capacity .. Delcotron Generator .. Engine Block Heater	12 Volt; Negative Ground Two; 550 CCA ♦ ea. @ 0°F. 115 min. ea. @ 80°F. 66 amp. 600 watts, 120 volts		
Frame	Carbon Steel; 36, -39,000 psi		
Section Modulus—117.5" WB ..	3.14	—	—
—131.5" WB ..	3.88	3.88	4.53
Fuel Tank (nominal capacity) .. —117.5" WB .. —131.5" WB ..	16 gal. 20 gal.	— 20 gal.	— 20 gal.
Steering Gear Type	Integral Power		
Transmission	4-Sp.Man.(SM 465)	4-Speed Manual (SM 465)	
Shift Location	Floor	Floor	
Transfer Case	New Process 208 2-Speed Conventional		
Shift Lever	Single Lever		
Tires	(5) P235/75R15 All Seasons Steel Belted Radial	(4) LT215/85R16C (6PR)	Fr. (2) LT235/85R16D (8PR) Rr. (2) LT235/85R16E (10PR)
Wheels	(5) Disc 15" x 6"	(4) Disc 16" x 6.5"	(4) Disc 16" x 6.5"

★Not available for registration in State of California

♦CCA-Cold Cranking Amps

GASOLINE**C/K PICKUP—4-Wheel Drive****K30/3500 REGULAR CABS
K30/3500 BONUS CAB & CREW CABS****STANDARD SPECIFICATIONS**

(See Gray Tab Section for Specification Details)

Series	K30/3500 Regular Cab	K30/3500 Bonus/Crew Cab
Engine	4.8 Liter, 292 1-bbl. L6	
Base Equip.	11"; 124 sq. in.	
Clutch	Oiled-paper Element	
Air Filter	Throwaway Type	
Oil Filter	Single; Stainless Steel	
Exhaust System	See Engine & Cooling Section for specific model applications	
Emission Control Systems ..		
Suspension, Front	Salisbury Axle; Hypoid Drive; Single Stage Leaf Springs	
Capacity	4500 lb.	
Axle Ratio	4.56	
Springs @ Ground	2250 lb. ea.	
Shock Absorbers	32mm dia.	
Stabilizer Bar	1.25" dia.	
Hubs, Manual Locking ...	Standard	
Suspension, Rear	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs	
Axle Capacity	7500 lb.	
Axle Ratio	4.56	
Springs @ Ground	3500 lb. ea.	
Shock Absorbers	32mm dia.	
Brakes	Hydraulic; Self-adjusting	
Front	Disc; 12.5" Rotor	
Rear	Drum; 13.0" x 3.5"	
Booster	Hydraulic Power	
Parking ...	Cable to Rear Wheels	
Electrical	12 Volt; Negative Ground	
Battery—Freedom Type ...	405 CCA ♦ @ 0°F.	
—Reserve Capacity ...	75 min. @ 80°F.	
Delcotron Generator ..	37 amp.	
Frame	Carbon Steel; 36,39,000 psi	
Section Modulus	6.14	7.33
Fuel Tank (nominal capacity) ..	20 gal.	
Steering Gear Type	Integral Power	
Transmission	4-Speed Manual (SM 465)	
Shift Location ..	Floor	
Transfer Case	New Process 205 2-Speed Conventional	
Shift Lever ..	Single Lever	
PTO Opening ..	Left Side	
Tires—Front	(2) LT235/85R16D (8PR)	
—Rear ...	(2) LT235/85R16E (10PR)	
Wheels	(4) Disc	
	16" x 6.5"	

♦ CCA-Cold Cranking Amps

C/K PICKUP—4-Wheel Drive

DIESEL


K30/3500 REGULAR CABS AND K30/3500 BONUS CAB & CREW CABS

STANDARD SPECIFICATIONS

(See Gray Tab Section for Specification Details)

Series	K30/3500 Regular Cab	K30/3500 Bonus/Crew Cab
Engine	6.2 Liter, 379 Cu. In. V8 Diesel	
Base Equip.	12"; 150 sq. in.	
Clutch	Poly-wrapped, Oiled-paper Element	
Air Filter	Throwaway Type	
Oil Filter	Standard	
Oil Cooler	Dual, Aluminized	
Exhaust System	See Engine & Cooling Section for specific model applications	
Emission Control Systems		
Suspension, Front	Salisbury Axle; Hypoid Drive; Single Stage Leaf Springs	
Capacity	4500 lb.	
Axle Ratio	4.10	
Springs @ Ground	2250 lb. ea.	
Shock Absorbers	32mm dia.	
Stabilizer Bar	1.25" dia.	
Hubs, Manual Locking	Standard	
Suspension, Rear	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs	
Axle Capacity	7500 lb.	
Axle Ratio	4.10	
Springs @ Ground	3500 lb. ea.	
Shock Absorbers	32mm dia.	
Brakes	Hydraulic; Self-adjusting	
Front	Disc; 12.5" Rotor	
Rear	Drum; 13.0" x 3.5"	
Booster	Hydraulic Power	
Parking	Cable to Rear Wheels	
Electrical	12 Volt; Negative Ground	
Battery—Freedom Type	Two; 550 CCA ♦ ea. @ 0°F.	
—Reserve Capacity	115 min. ea. @ 80°F.	
Delcotron Generator	66 amp.	
Engine Block Heater	600 watts, 120 volts	
Frame	Carbon Steel; 36,39,000 psi	
Section Modulus	6.14	7.33
Fuel Tank (nominal capacity)	20 gal.	
Steering Gear Type	Integral Power	
Transmission	4-Speed Manual (SM 465)	
Shift Location	Floor	
Transfer Case	New Process 205 2-Speed Conventional	
Shift Lever	Single Lever	
PTO Opening	Left Side	
Tires—Front	(2) LT235/85R16D (8PR)	
—Rear	(2) LT235/85R16E (10PR)	
Wheels	(4) Disc 16" x 6.5"	

♦ CCA-Cold Cranking Amps

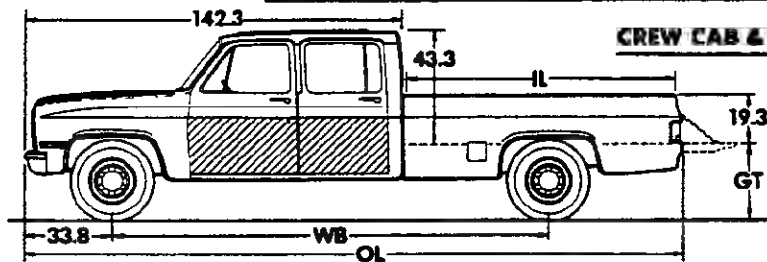GASOLINE
C/K PICKUP
C10/1500-30/3500 SERIES FLEETSIDE/WIDESIDE PICKUP

CREW CAB & BONUS CAB
Body Ordering Codes:

Regular Cab—E63


Bonus Cab—E63 & YG4

Crew Cab—E63 & A33

Sign Panel Area (side)

Regular Cab—22" x 39 1/4"

Bonus/Crew Cab—22" x 72 1/4"

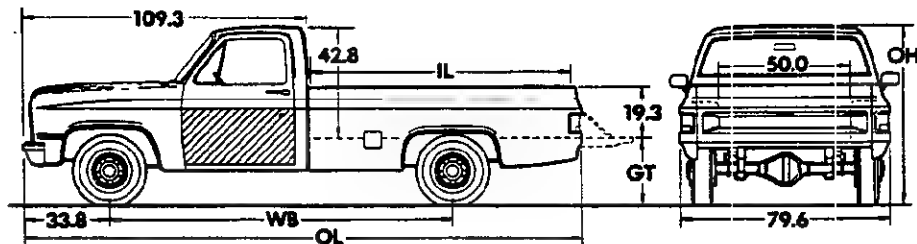
REGULAR CAB


Model	Wheelbase (in)	Body—Payload Weight Distribution*	
		% Front	% Rear
C1	117.5	1	99
C1-3	131.5	4	96
C2-3	164.5	3	97

*Estimate based on water-level loading.

Series	Ground Clearance (in)*	
	Front	Rear
C1	7.6	7.3
C2	8.0	7.8
C3	8.0	7.7

Model	Engine No. Cyl.	Dimensions (in)*					Curb Weight (lb)			Model Weight (lb)*		
		WB	IL	OL	OH	GT	Front	Rear	Total	Front	Rear	Total

C10/1500 SERIES

C10703	6	117.5	78.2	193.5	69.2	27.6	2009	1423	3432	2229	1653	3882
C10903	6	131.5	98.1	212.2	69.2	27.6	2088	1507	3595	2334	1711	4045

C20/2500 SERIES

C20903	6	131.5	98.1	212.2	72.2	31.0	2293	1699	3992	2539	1903	4442
C20903 (w/C6P)	6	131.5	98.1	212.2	72.2	31.0	2323	1766	4089	2569	1970	4539
C20943 (Bonus Cab)	6	164.5	98.1	246.4	73.6	32.1	2692	2081	4773	2977	2246	5223
C20943 (Crew Cab)	6	164.5	98.1	246.4	73.6	32.1	2719	2115	4834	3199	2535	5734

C30/3500 SERIES


C30903	6	131.5	98.1	212.2	73.6	33.5	2506	1920	4426	2752	2124	4876
C30943 (Bonus Cab)	6	164.5	98.1	246.4	73.7	32.3	2745	2117	4862	3030	2282	5312
C30943 (Crew Cab)	6	164.5	98.1	246.4	73.7	32.3	2772	2151	4923	3252	2571	5823

*Dimensions with standard equipment, unloaded. *Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb.). Total Model Weight may vary as much as ±50 lbs. to allow for production build variation.

C/K PICKUP


C10/1500-30/3500 SERIES FLEETSIDE/WIDESIDE PICKUP

DIESEL

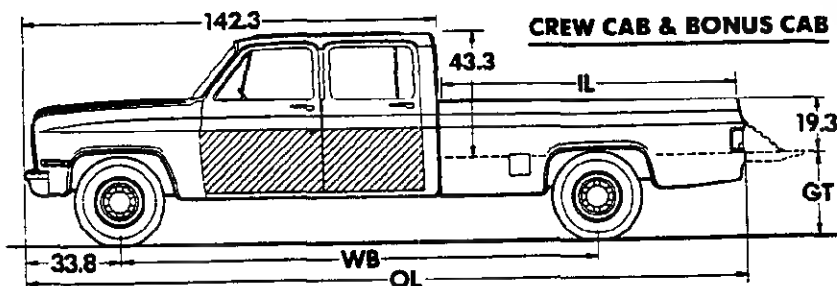

Body Ordering Codes:
 Regular Cab—E63/B3J
 Bonus Cab—E63/YG4/B3J
 Crew Cab—E63/AS3/B3J

Sign Panel Area (side)
 Regular Cab—22" x 39 1/4"
 Bonus/Crew Cab—22" x 72 1/4"

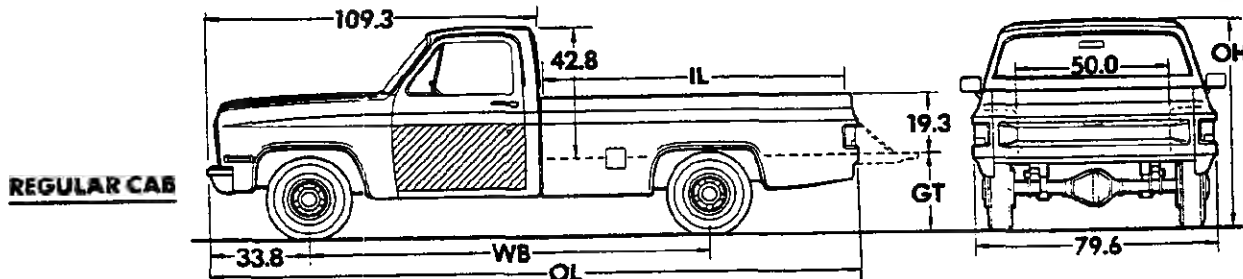

Model	Wheelbase (in)	Body—Payload Weight Distribution*	
		% Front	% Rear
C1	117.5	1	99
C1-3	131.5	4	96
C2-3	164.5	3	97

*Estimate based on water-level loading.

Series	Ground Clearance (in)*	
	Front	Rear
C1	7.6	7.3
C2	8.0	7.8
C3	8.0	7.7

Model	Engine No. Cyl.	Dimensions (in)*					Curb Weight (lb)			Model Weight (lb)*		
		WB	IL	OL	OH	GT	Front	Rear	Total	Front	Rear	Total

C10/1500 SERIES

C10703	8	117.5	78.2	193.5	69.2	27.6	2471	1449	3920	2691	1679	4370
C10903	8	131.5	98.1	212.2	69.2	27.6	2550	1535	4085	2796	1739	4535

C20/2500 SERIES

C20903	8	131.5	98.1	212.2	72.2	31.0	2752	1721	4473	2998	1925	4923
C20903 (w/C6P)	8	131.5	98.1	212.2	72.2	31.0	2782	1788	4570	3028	1992	5020
C20943 (Bonus Cab)	8	164.5	98.1	246.4	73.6	32.1	3106	2144	5250	3391	2309	5700
C20943 (Crew Cab)	8	164.5	98.1	246.4	73.6	32.1	3133	2178	5311	3613	2598	6211

C30/3500 SERIES

C30903	8	131.5	98.1	212.2	73.6	33.5	2899	1972	4871	3145	2176	5321
C30943 (Bonus Cab)	8	164.5	98.1	246.4	73.7	32.3	3147	2156	5303	3432	2321	5753
C30943 (Crew Cab)	8	164.5	98.1	246.4	73.7	32.3	3174	2190	5364	3654	2610	6264

*Dimensions with standard equipment, unloaded. *Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb.). Total Model Weight may vary as much as ± 50 lbs. to allow for production build variation.

GASOLINE

C/K PICKUP


K10/1500-30/3500 SERIES FLEETSIDE/WIDESIDE PICKUP

Body Ordering Codes:

Regular Cab—E63

Bonus Cab—E63 & YG4

Crew Cab—E63 & AS3

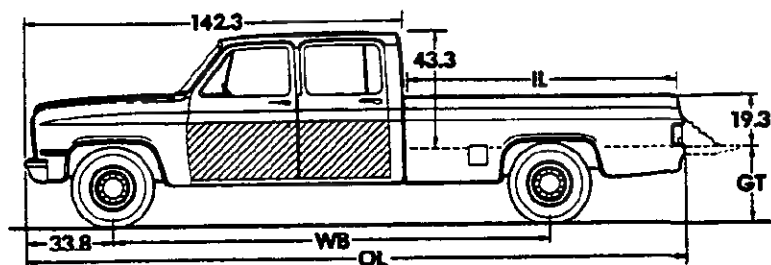

BONUS CAB & CREW CAB


Sign Panel Area (side)

Regular Cab—22" x 39 1/4"

Bonus/Crew Cab—22" x 72 1/4"



REGULAR CAB

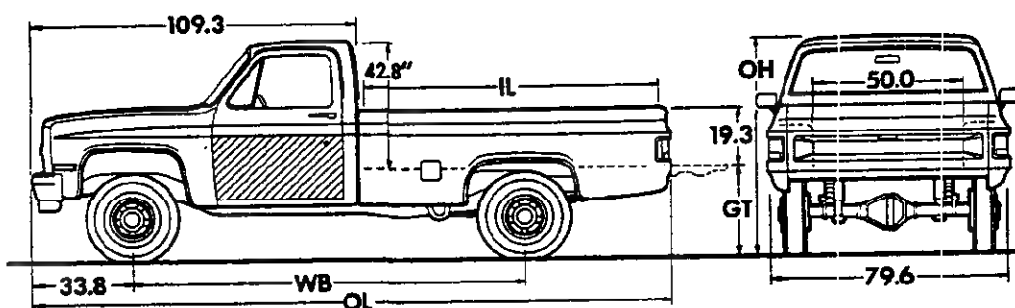

Model	Wheelbase (in)	Body—Payload Weight Distribution*	
		% Front	% Rear
K1	117.5	1	99
K1-3	131.5	4	96
K3	164.5	3	97

*Estimate based on water-level loading.

Series	Ground Clearance (in)*	
	Front	Rear
K1	7.4	7.1
K2	8.8	7.2
K3	8.3	7.8

Model	Engine No. Cyl.	Dimensions (in)*					Curb Weight (lb)			Model Weight (lb)*		
		WB	IL	OL	OH	GT	Front	Rear	Total	Front	Rear	Total

K10/1500 SERIES

K10703	6	117.5	78.2	193.8	73.4	32.0	2416	1605	4021	2636	1835	4471
K10903	6	131.5	98.1	212.2	73.4	32.0	2504	1696	4200	2750	1900	4650

K20/2500 SERIES

K20903	8	131.5	98.1	212.2	74.2	33.2	2725	1634	4359	2971	1838	4809
K20903 (w/C6P)	6	131.5	98.1	212.2	74.2	33.2	2733	1815	4548	2979	2019	4998

K30/3500 SERIES

K30903	6	131.5	98.1	212.2	76.4	35.7	2918	1995	4913	3164	2199	5363
K30943 (Bonus Cab)	6	164.5	98.1	246.4	76.3	34.6	3166	2172	5338	3451	2337	5788
K30943 (Crew Cab)	6	164.5	98.1	246.4	76.3	34.6	3193	2206	5399	3673	2626	6299


*Dimensions with standard equipment, unloaded. *Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb). Total Model Weight may vary as much as ±50 lbs. to allow for production build variation.

C/K PICKUP

K10/1500-30/3500 SERIES FLEETSIDE/WIDESIDE PICKUP

DIESEL


Body Ordering Codes:
 Regular Cab—E63/B3J
 Bonus Cab—E63/YG4/B3J
 Crew Cab—E63/AS3/B3J

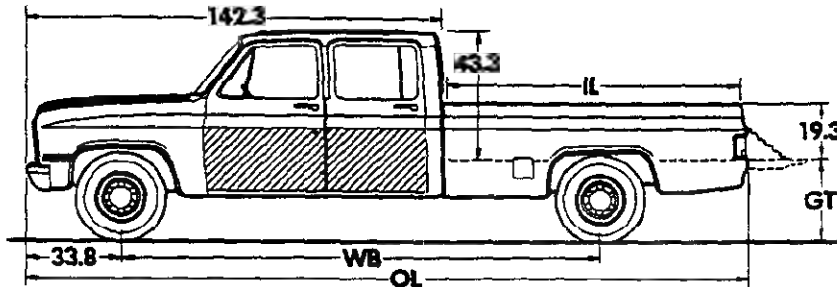

BONUS CAB & CREW CAB

Sign Panel Area (side)
 Regular Cab—22" x 39 1/4"
 Bonus/Crew Cab—22" x 72 1/4"

REGULAR CAB

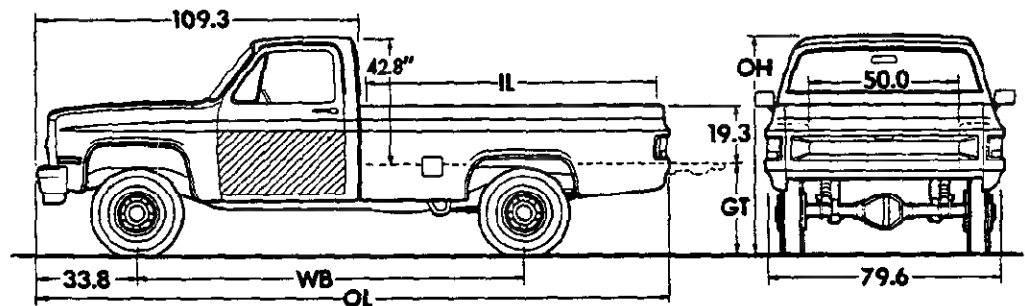

Model	Wheelbase (in)	Body—Payload Weight Distribution*	
		% Front	% Rear
K1	117.5	1	99
K1-3	131.5	4	96
K3	164.5	3	97

*Estimate based on water-level loading.

Series	Ground Clearance (in)*	
	Front	Rear
K1	7.4	7.1
K2	8.8	7.2
K3	8.3	7.8

Model	Engine No. Cyl.	Dimensions (in)*					Curb Weight (lb)			Model Weight (lb)*		
		WB	IL	OL	OH	GT	Front	Rear	Total	Front	Rear	Total

K10/1500 SERIES

K10703	8	117.5	78.2	193.8	73.4	32.0	2861	1629	4490	3081	1859	4940
K10903	8	131.5	98.1	212.2	73.4	32.0	2946	1722	4668	3192	1926	5118

K20/2500 SERIES

K20903	8	131.5	98.1	212.2	74.2	33.2	3027	1767	4794	3273	1971	5244
K20903 (w/CSP)	8	131.5	98.1	212.2	74.2	33.2	3035	1848	4883	3281	2052	5333

K30/3500 SERIES

K30903	8	131.5	98.1	212.2	76.4	35.7	3320	2047	5367	3566	2251	5817
K30943 (Bonus Cab)	8	164.5	98.1	246.4	76.3	34.6	3566	2235	5801	3851	2400	6251
K30943 (Crew Cab)	8	164.5	98.1	246.4	76.3	34.6	3593	2269	5862	4073	2689	6762


*Dimensions with standard equipment, unloaded. *Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb). Total Model Weight may vary as much as ± 50 lbs. to allow for production build variation.

GASOLINE


C/K PICKUP

STEPSIDE/FENDERSIDE PICKUP

Body Ordering Code—E62

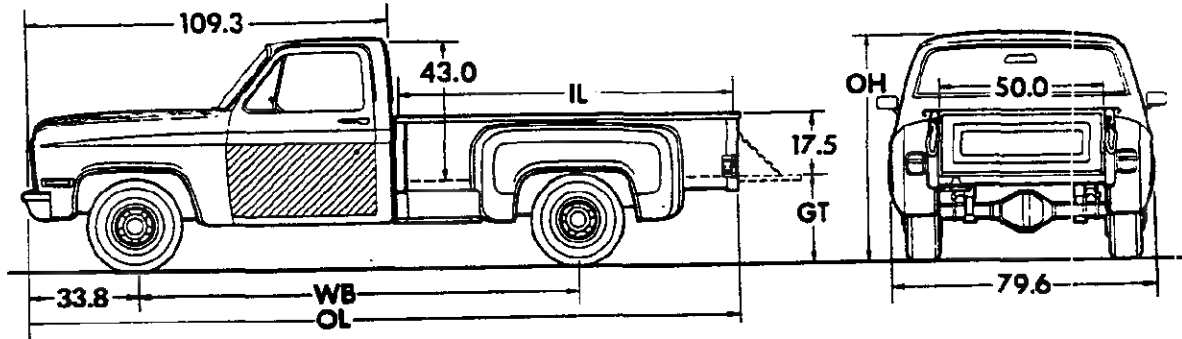

Sign Panel Area (side)
22" x 39½"



Model	Wheelbase (in.)	Body—Payload Weight Distribution*	
		% Front	% Rear
C-K1	117.5	1	99
C-K1-2-3	131.5	4	96

*Estimate based on water-level loading.

Series	Ground Clearance (in.)*	
	Front	Rear
C1	7.5	7.2
C2	8.0	7.8
C3	8.0	7.8
K1	7.2	7.1
K2	8.8	7.2

Model	Engine No. Cyl.	Dimensions (in.)*					Curb Weight (lb)			Model Weight (lb)*		
		WB	IL	OL	OH	GT	Front	Rear	Total	Front	Rear	Total

C10/1500 SERIES

C10703	6	117.5	78.4	191.1	69.5	27.5	2007	1378	3385	2227	1608	3835
---------------	---	-------	------	-------	------	------	------	------	------	------	------	------

C20/2500 SERIES

C20903	6	131.5	98.3	210.8	72.2	30.8	2288	1642	3930	2534	1846	4380
C20903 (W/C6P)	6	131.5	98.3	210.8	72.2	30.8	2318	1709	4027	2564	1913	4477

C30/3500 SERIES

C30903	6	131.5	98.3	210.8	73.6	33.8	2501	1863	4364	2747	2067	4814
---------------	---	-------	------	-------	------	------	------	------	------	------	------	------

K10/1500 SERIES

K10703	6	117.5	78.4	191.4	73.4	31.8	2414	1560	3974	2634	1790	4424
---------------	---	-------	------	-------	------	------	------	------	------	------	------	------

K20/2500 SERIES

K20903	8	131.5	98.3	211.2	74.2	33.1	2720	1677	4397	2966	1881	4847
K20903 (W/C6P)	6	131.5	98.3	211.2	74.2	33.1	2728	1758	4486	2974	1962	4936


★ Dimensions with standard equipment, unloaded. *Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb.). Total Model Weight may vary as much as ± 50 lbs. to allow for production build variation.

C/K PICKUP

STEPSIDE/FENDERSIDE PICKUP

Body Ordering Code—E62/B3J

DIESEL

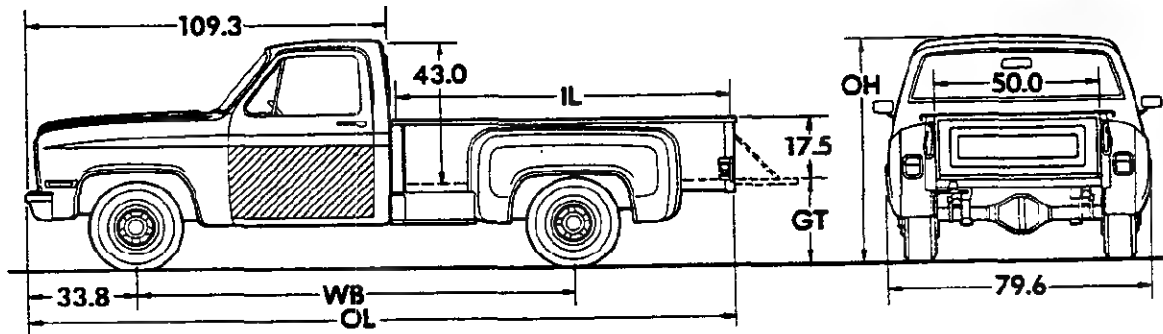

Sign Panel Area (side)
22" x 39 1/4"



Model	Wheelbase (in.)	Body—Payload Weight Distribution*	
		% Front	% Rear
C-K1	117.5	1	99
C-K1-2-3	131.5	4	96

*Estimate based on water-level loading.

Series	Ground Clearance (in.)*	
	Front	Rear
C1	7.5	7.2
C2	8.0	7.8
C3	8.0	7.8
K1	7.2	7.1
K2	8.8	7.2

Model	Engine No. Cyl.	Dimensions (in.)*					Curb Weight (lb)			Model Weight (lb)*		
		WB	IL	OL	OH	GT	Front	Rear	Total	Front	Rear	Total

C10/1500 SERIES

C10703	8	117.5	78.4	191.1	69.5	27.5	2469	1404	3873	2689	1634	4323
---------------	---	-------	------	-------	------	------	------	------	------	------	------	------

C20/2500 SERIES

C20903	8	131.5	98.3	210.8	72.2	30.8	2747	1664	4411	2993	1868	4861
C20903 (W/C6P)	8	131.5	98.3	210.8	72.2	30.8	2777	1731	4508	3023	1935	4958

C30/3500 SERIES

C30903	8	131.5	98.3	210.8	73.4	33.3	2994	1915	4909	3140	2119	5259
---------------	---	-------	------	-------	------	------	------	------	------	------	------	------

K10/1500 SERIES

K10703	8	117.5	78.4	191.4	73.4	31.8	2859	1584	4443	3079	1814	4893
---------------	---	-------	------	-------	------	------	------	------	------	------	------	------

K20/2500 SERIES

K20903	8	131.5	98.3	211.2	74.2	33.1	3022	1710	4732	3268	1914	5182
K20903 (W/C6P)	8	131.5	98.3	211.2	74.2	33.1	3030	1791	4821	3276	1995	5271

*Dimensions with standard equipment, unloaded. *Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb.). Total Model Weight may vary as much as ± 50 lbs. to allow for production build variation.

C/K PICKUP

POWER TEAMS

ALL STATES EXCEPT CALIFORNIA

C-K10/1500 SERIES

POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE)
(Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

ENGINE	TRANSMISSION			AXLES					GVWR
	3SP	4SP	AUTO		2.73	3.08	3.42	3.73	
W/NA5 STANDARD EMISSION EQUIPMENT									
-C10703-C10903									
LB1 V6 4.3 Liter (262-4BBL)	MM3	MM4	MX1		GQ1	*GU4	—	—	49/5200
		MM7	MX0		—	GQ1	*GU6	—	49/5200
	MM3	MM4	MX0		—	GQ1	GU6	—	5600
		MM7			—	—	GQ1	%GT4	5600
	MM3		MX1		GQ1	GU4	—	—	56/6100
		MM7			—	—	—	%GQ1	6100
		MM4			—	GQ1	—	—	6100
					—	—	GQ1	—	6100
					—	GQ1	GU6	—	6100
			MX0		—	GQ1	GU6	—	6100
LE9 V8 5.0 Liter (305-4BBL)	MM3	MM7		—	GQ1	GU6	—	N/A 6100	
		MM4	MX0/1		GQ1	GU4	—	N/A 6100	
	MM3	MM7		—	—	GQ1	—	6100	
		MM4			—	GQ1	—	6100	
			MX0		GQ1	GU4	GU6	6100	
			MX1		GQ1	GU4	—	6100	
LH6 Diesel 6.2 Liter V8 (379 Cu In)(Reqs B3J)		MM7		—	GQ1	GU6	—	52/5600	
		MM4	MX0		GQ1	GU4	—	52/5600	
		MM7		—	—	GQ1	—	6100	
		MM4	MX0		—	GQ1	GU6	6100	
-K10703-K10903									
LB1 V6 4.3 Liter (262-4BBL)		MM4	MX0		—	—	GQ1	%GT4	6100
		MM7			—	—	—	%GQ1	6100
LE9 V8 5.0 Liter (305-4BBL)		MM7			—	—	GQ1	GT4	6100
		MM4			GQ1	GU4	—	—	6100
			MX0		—	GQ1	GU6	GT4	6100
LH6 Diesel 6.2 Liter V8 (379 Cu In)(Reqs B3J)		MM4	MX0		—	GQ1	GU6	—	6100
		MM7			—	—	GQ1	—	6100
W/NA6 HIGH ALTITUDE EMISSION EQUIPMENT									
-C10703-C10903									
LB1 V6 4.3 Liter (262-4BBL)	MM3	MM4/7	MX0/1		—	—	GQ1	%GT4	N/A 6100
	MM3	MM4	MX0/1		—	—	GQ1	%GT4	6100
		MM7			—	—	—	%GQ1	6100
LE9 V8 5.0 Liter (305-4BBL)	MM3	MM4/7	MX0		—	GQ1	—	GT4	N/A 6100
	MM3	MM7			—	—	—	GQ1	6100
		MM4	MX0 MX1		—	GQ1 GQ1	— GU6	GT4 —	6100 ALL
LH6 Diesel 6.2 Liter V8 (379 Cu In)(Reqs B3J)		MM4/7	MX0		—	GQ1	—	GT4	52/5600
		MM4	MX0		—	GQ1	GU6	GT4	6100
		MM7			—	—	GQ1	GT4	6100
-K10703-K10903									
LB1 V6 4.3 Liter (262-4BBL)		MM4	MX0		—	—	GQ1	%GT4	6100
		MM7			—	—	—	%GQ1	6100
LE9 V8 5.0 Liter (305-4BBL)		MM7			—	—	GQ1	GT4	6100
		MM4			—	GQ1	—	GT4	6100
			MX0		—	GQ1	GU6	GT4	6100
LH6 Diesel 6.2 Liter V8 (379 Cu In)(Reqs B3J)		MM4/7	MX0		—	—	GQ1	GT4	6100

*N/A P195/75R15 or P205/75R15 Tires
%Reqs KC4 Eng. Oil Cooler

C/K PICKUP POWER TEAMS CALIFORNIA ONLY

C-K10/1500 SERIES

POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE)
(Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

ENGINE	TRANSMISSION			AXLES				GVWR	
	3-SP	4-SP	AUTO	2.73	3.08	3.42	3.73		
W/YF5 CALIFORNIA EMISSION REQUIREMENTS -C10703-C10903									
LB1 V6 4.3 Liter (262-4BBL)	MM3				GQ1	GU4	—	—	49/5200
		MM7	MXO		—	GQ1	GU6	—	49/5200
	MM3		MXO		—	GQ1	GU6	—	5600
		MM7			—	—	GQ1	%GT4	5600
	MM3				—	—	GQ1	—	6100
		MM7			—	—	—	%GQ1	6100
LF3 V8 5.0 Liter (305-4BBL)			MXO		—	GQ1	GU6	—	6100
			MXO		GQ1	GU4	—	—	49/5200
			MXO		—	GQ1	—	—	56/6100
-K10703-K10903									
LB1 4.3 Liter (262-4BBL)		MM4	MXO		—	—	GQ1	%GT4	6100
LS9 V8 5.7 Liter (350-4 BBL)			MXO		GQ1	GU4	—	—	6100

*N/A P195/75R15 or P205/75R15 Tires
%Reqs KC4 Eng. Oil Cooler

ENGINE RATINGS

ALL STATES EXCEPT CALIFORNIA

SAE Net Ratings	*4.3 Liter 262 4-bbl V6	**4.8 Liter 292 1-bbl L6	*5.0 Liter 305 4-bbl V8
Net Horsepower	155 @ 4000 rpm	115 @ 4000 rpm	160 @ 4400 rpm
Net Torque, lb-ft	230 @ 2400 rpm	210 @ 800 rpm	235 @ 2000 rpm
SAE Net Ratings	*5.7 Liter 350 4-bbl V8	**5.7 Liter 350 4-bbl V8	**7.4 Liter 454 4-bbl V8
Net Horsepower	165 @ 3800 rpm	185 @ 4000 rpm	240 @ 3800 rpm
Net Torque, lb-ft	275 @ 1600 rpm	285 @ 2400 rpm	375 @ 3200 rpm
SAE Net Ratings	*6.2 Liter 379 V8 Diesel		**6.2 Liter 379 V8 Diesel
Net Horsepower	130 @ 3600 rpm		148 @ 3600 rpm
Net Torque, lb-ft	240 @ 2000 rpm		246 @ 2000 rpm

*Engine with Light or Medium Duty Emissions (w/GVWR up to 8500 lb.).
**Engine with Heavy Duty Emissions (w/GVWR over 8500 lb.).

CALIFORNIA ONLY

SAE Net Ratings	*4.3 Liter 262 4-bbl V6	*5.0 Liter 305 4-bbl V8	*5.7 Liter 350 4-bbl V8
Net Horsepower	155 @ 4000 rpm	155 @ 4000 rpm	165 @ 3800 rpm
Net Torque, lb-ft	230 @ 2400 rpm	245 @ 1600 rpm	275 @ 1600 rpm
SAE Net Ratings	**5.7 Liter 350 4-bbl V8	**7.4 Liter 454 4-bbl V8	**6.2 Liter 379 V8 Diesel
Net Horsepower	155 @ 4000 rpm	240 @ 3800 rpm	148 @ 3600 rpm
Net Torque, lb-ft	240 @ 2800 rpm	375 @ 3200 rpm	246 @ 2000 rpm

*Engine with Light or Medium Duty Emissions (w/GVWR up to 8500 lb.).
**Engine with Heavy Duty Emissions (w/GVWR over 8500 lb.).

C/K PICKUP
POWER TEAMS
ALL STATES EXCEPT CALIFORNIA
C-K20/2500 SERIES

POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE)
(Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

ENGINE	TRANSMISSION				AXLES					GVWR
	4-SP	AUTO			#123	342	373	410	456	
W/NA5 STANDARD EMISSION EQUIPMENT (w/LL4, L25, LT9 or LE8 Satisfies High Altitude Emission Requirements)										
-C20903										
LB1 V6 4.3 Liter (262-48BL) (N/A C6P)	MM4	MX0			—	GQ1	%GT4	—	—	84/7200
L25 L6 4.8 Liter (292-18BL)(Reqs C6P)	MM4				—	—	—	GQ1	HC4	8600
LE9 V8 5.0 Liter (305-48BL) (N/A C6P)	MM4				#GQ1	GU6	—	—	—	6400
	MM4	MX0			#GQ1	GU6	GT4	—	—	6400
						—	GQ1	—	—	—
LT9 V8 5.7 Liter (350-4-8BL)(Reqs C6P)	MM4	MX0			—	GQ1	GT4	—	—	7200
					—	GQ1	GT4	GT5	—	8600
		MX1			—	—	—	GQ1	HC4	8600
LE8 V8 7.4 Liter (454-48BL) (Reqs C6P,N41&UA1)	MM4	MX1			#GQ1	—	GT4	GT5	—	8600
LH6 Diesel 6.2 Liter V8 (379 Cu In)(Reqs B3J) (N/A C6P)	MM4				—	GQ1	GT4	—	—	6400
		MX0			#GQ1	GU6	—	—	—	6400
	MM4				—	—	GQ1	GT5	—	7200
		MX0			—	GQ1	—	—	—	7200
LL4 Diesel (379 Cu In) (Reqs B3J & C6P)	MM4				—	—	GQ1	GT5	—	8600
		MX1			—	—	—	GQ1	HC4	8600
-K20903										
L25 L6 4.8 Liter (292-18BL)(Reqs C6P)	MM4				—	—	—	GQ1	—	8600
LS9 V8 5.7 Liter (350-48BL)(N/A C6P)	MM4				#GQ1	GU6	—	—	—	6600
		MX0			#GQ1	GU6	GT4	—	—	6600
LT9 V8 5.7 Liter (350-4-8BL)(Reqs C6P)	MM4				—	GQ1	GT4	GT5	—	8600
		MX1			—	—	—	GQ1	—	8600
LH6 Diesel 6.2 Liter V8 (379 Cu In)(Reqs B3J) (N/A C6P)	MM4				—	—	GQ1	GT5	—	6600
		MX0			—	GQ1	GT4	—	—	6600
LL4 Diesel 6.2 Liter V8 (379 Cu In) (Reqs B3J&C6P)	MM4				—	—	GQ1	GT5	—	8600
		MX1			—	—	—	GQ1	—	8600
-C20943										
L25 L6 4.8 Liter (292-18BL)	MM4				—	—	—	GQ1	HC4	8600
LT9 V8 5.7 Liter (350-48BL)	MM4				—	—	GQ1	GT5	—	8600
		MX1			—	—	—	*GQ1	HC4	8600
LE8 V8 7.4 Liter (454-48BL) (Reqs N41&UA1)	MM4	MX1			#GQ1	—	GT4	GT5	—	8600
LL4 Diesel 6.2 Liter V8 (379 Cu In)(Reqs B3J)	MM4				—	—	GQ1	GT5	—	8600
		MX1			—	—	—	GQ1	HC4	8600

#N/A G80 Locking Differential; w/LE8 Eng Rear Axle is 3.21
%Reqs KC4 Eng Oil Cooler

C/K PICKUP

POWER TEAMS

ALL STATES EXCEPT CALIFORNIA

C-K20/2500 SERIES

ENGINE	TRANSMISSION			AXLES					GVW
	4-SP	AUTO		#323	342	373	410	456	
W/NA6 HIGH ALTITUDE EMISSION EQUIPMENT ■									
-C20903									
LB1 V6 4.3 Liter (262-48BL) (N/A C6P)	MM4	MX0		—	—	%GQ1	%GT5	—	64/7200
LE9 V8 5.0 Liter (305-48BL)(N/A C6P)	MM4	MX0		—	GQ1	GT4	—	—	64/7200
LH6 Diesel 6.2 Liter V8(379 Cu In) (N/A C6P) (Reqs B3J)	MM4	MX0		—	GQ1	GT4	—	—	6400
	MM4			—	—	GQ1	GT5	—	7200
		MX0		—	GQ1	GT4	—	—	7200
LL4 Diesel (379 Cu In)(Reqs B3J&C6P)	MM4			—	—	GQ1	GT5	—	8600
		MX1		—	—	—	GQ1	HC4	8600
-K20903									
LS9 V8 5.7 Liter (350-48BL)(N/A C6P)	MM4			#GQ1	GU6	—	—	—	6600
		MX0		—	GQ1	GT4	—	—	6600
LH6 Diesel 6.2 Liter V8(379 Cu In) (N/A C6P)(Reqs B3J)	MM4			—	—	GQ1	GT5	—	6600
		MX0		—	GQ1	GT4	—	—	6600
LL4 Diesel 6.2 Liter V8 (Reqs B3J&C6P)	MM4			—	—	GQ1	GT5	—	8600
		MX1		—	—	—	GQ1	—	8600
-C20943									
LL4 Diesel 6.2 Liter V8 (379 Cu In)(Req B3J)	MM4			—	—	GQ1	GT5	—	8600
		MX1		—	—	—	GQ1	HC4	8600

#N/A G80 Locking Differential; w/LE8 Eng Rear Axle is 3.21

%Reqs KC4 Eng Oil Cooler

■ High Altitude Emission Equipment (FOR EXHAUST SMOKE REDUCTION PURPOSES
AT HIGH ALTITUDE; NOT REQUIRED TO SATISFY HIGH ALTITUDE REGULATIONS) (REQS LL4 ENG)

C/K PICKUP

POWER TEAMS

CALIFORNIA ONLY

C.K20/2500 SERIES

POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE)
 (Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

ENGINE	TRANSMISSION			AXLES					GVWR
	4SP	AUTO		#323	342	373	410	456	
W/YF5 California Emission Requirements									
-C20903									
LS9 V8 5.7 Liter (350-48BL)(N/A C6P)		MX0		#GQ1	GU8	—	—	—	84/7200
LT9 V8 5.7 Liter (350-4-BBL)(Reqs C6P)	MM4			—	GQ1	GT4	GT5	—	8600
		MX1		—	—	—	GQ1	HC4	8600
LE8 V8 7.4 Liter (454-48BL) (Reqs C6P, N41&UA1)	MM4	MX1		#GQ1	—	GT4	GT5	—	8600
LL4 Diesel (379 Cu In)(Reqs B3J&C6P)	MM4			—	—	GQ1	GT5	—	8600
		MX1		—	—	—	GQ1	HC4	8600
-K20903									
LT9 V8 5.7 Liter (350-4-BBL)(Reqs C6P)	MM4			—	GQ1	GT4	GT5	—	8600
		MX1		—	—	—	GQ1	—	8600
LL4 Diesel 6.2 Liter V8 (379 Cu In)(Reqs B3J&C6P)	MM4			—	—	GQ1	GT5	—	8600
		MX1		—	—	—	GQ1	—	8600
-C20943									
LT9 V8 5.7 Liter (350-48BL)	MM4			—	—	GQ1	GT5	—	8600
		MX1		—	—	—	GQ1	HC4	8600
LE8 V8 7.4 Liter (454-48BL) (Reqs N41&UA1)	MM4	MX1		#GQ1	—	GT4	GT5	—	8600
LL4 Diesel 6.2 Liter V8 (379 Cu In)(Reqs B3J)	MM4			—	—	GQ1	GT5	—	8600
		MX1		—	—	—	GQ1	HC4	8600

#N/A G80 Locking Differential;w/LE8 Eng Rear Axle is 3.21

POWER TAKE-OFF EQUIPMENT

AVAILABLE ONLY FROM BODY AND EQUIPMENT COMPANIES

Power take-offs may be installed on the sides (or tops in some cases) of the transmission. Standard SAE 6-bolt or 8-bolt power take-off openings are provided to accommodate a variety of PTO's. Consult the Transmission section for location and number of openings on the transmission you desire to fit.

Power take-offs may be controlled by a shift wire or lever, and may be operated with the transmission in neutral or when the

truck is in motion. Speed of the PTO shaft is determined by the engine rpm and the gear ratio between the transmission PTO drive gear and driven gear.

Consult the special equipment distributor to select the power take-off of correct capacity and type to meet operating requirements of each application.

DRIVELINE

SPECIFICATIONS

The propeller shaft and universal joint specifications shown below are based on Models with Standard Equipment Only. If optional equipment (engine, transmission, transfer case, rear axle) is ordered, different combinations of propeller shafts and universal

joints are provided to make up the driveline. These additional combinations are not described in the Data Book. If specifications for these combinations are necessary, they may be obtained through the Zone Office.

Model	Engine Used	Propeller Shafts						Universal Joints					
		No. Used	Diameter (in)				No. Used	Series					
			Front or Single	Front Axle to Trans. Case	Rear Axle to Trans. Case	Rear							
M10905/06	Four/Six	1	3.50				2	S44	1355				
S10516	Four/Six	1	3.50				2	S44	S44				
S10603	Four/Six	1	3.50				2	S44	S44				
S10803	Four/Six	2	2.75			2.75	3	S44	S44	S44			
S10653	Four/Six	2	2.75			2.75	3	S44	S44	S44			
T10516	Four/Six	2		2.00	2.75		4	P23H	P23H	S44	S44		
T10603	Four/Six	2		2.00	3.50		4	P23H	P23H	S44	S44		
T10803	Four/Six	2		2.00	3.50		4	P23H	P23H	S44	S44		
T10653	Four/Six	3		2.00	2.75	2.75	5	P23H	P23H	S44	S44	S44	
C10703	Six/V8	1	3.50				2	S44	S44				
C10903	Six/V8	2	2.75			2.75	3	S44	S44	S44			
C109 Suburban	V8	1	3.50				2	S44	S44				
C20903	Six/V8	2	2.75			2.75	3	1355	1355	1355			
C209 Suburban	V8	2	2.75			2.75	3	1355	1355	1355			
C20943 Bonus Cab	Six/V8	2	3.50			3.50	3	1355	1355	1355			
C20943 Crew Cab	Six/V8	2	3.50			3.50	3	1355	1355	1355			
C309-310 (exc. 43)	Six/V8	2	2.75			2.75	3	1355	1355	1355			
C314	Six/V8	2	3.00			3.50	3	1355	1355	1355			
C30943 Bonus Cab	Six/V8	2	3.50			3.50	3	1355	1355	1355			
C30943 Crew Cab	Six/V8	2	3.50			3.50	3	1355	1355	1355			
K105 Blazer/Jimmy	V8	2		2.00	2.75		4	1315	S44	1355	1355		
K107	Six/V8	2		2.00	2.75		4	1315	S44	S44	S44		
K10903	Six/V8	2		2.00	3.50		4	1315	S44	S44	S44		
K109 Suburban	V8	2		2.00	3.50		4	1315	S44	S44	S44		
K20903	Six/V8	2		2.00	3.50		4	1315	S44	1355	1355		
K209 Suburban	V8	2		2.00	3.50		4	1315	S44	1355	1355		
K30903	Six/V8	2		2.00	4.00		4	1315	S44	1355	1355		
K30943	Six/V8	3		2.00	3.00*		6	1315	S44	1355	1355	1355	1355
K310	Six/V8	3		2.00	3.00*		6	1315	S44	1355	1355	1355	1355
K314	Six/V8	3		2.00	3.00*		6	1315	S44	1355	1355	1355	1355
G110-210	Six/V8	1	3.50				2	S44	S44				
G113-213	Six/V8	2	2.75			2.75	3	S44	S44	S44			
G313-316	Six/V8	2	2.75			2.75	3	S44	1355	1355			
P208-210	Six/V8	2	2.75			2.75	3	1355	1355	1355			
P308-311-314 Motor Home	V8	2	3.00			2.75	3	1355	1355	1355			
P318 Motor Home	V8	2	3.50			3.50	3	1410	1355	1410			
P308-310	Six/V8	2	2.75			2.75	3	1355	1355	1355			
P314	Six/V8	2	3.00			3.50	3	1355	1355	1355			
P318 (Except Motor Home)	Six/V8	3	3.00			2.75▲	4	1355	1355	1355	1355		

*2 propshafts used between the rear axle and the transfer case.

▲2 propshafts used between the rear axle and the transmission; one 2.75" (rear) and one 3.00" (intermediate).

DRIVELINE DESIGN AND FEATURES

Hotchkiss drive is featured on all GM trucks equipped with single rear axle and the standard leaf spring rear suspension. Driveline serves only to transmit power between transmission and rear axle. Rear springs cushion the driving and braking forces at the rear axle for smooth operation. Hotchkiss drive keeps chassis weight down and provides efficient power transfer in all types of truck service.


Drivelines for GM trucks are engineered for reserve torque capacity, accurate balance, high rigidity and resistance to vibration.

Propeller shafts are made of smooth-wall steel tube. Length and tube diameters are proportioned for high rigidity to minimize flexing or "whip."

Universal joints are efficient needle bearing type. Trunnions are drop-forged and hardened for wear resistance and long life.

Center bearings, standard on many models, divide driveline into short, rigid propeller shafts. Rubber encased mounting minimizes transfer of vibrations.

Slip yoke adjusts length of driveline to match normal movement of rear axle over bumps, frees driveline of end stresses.

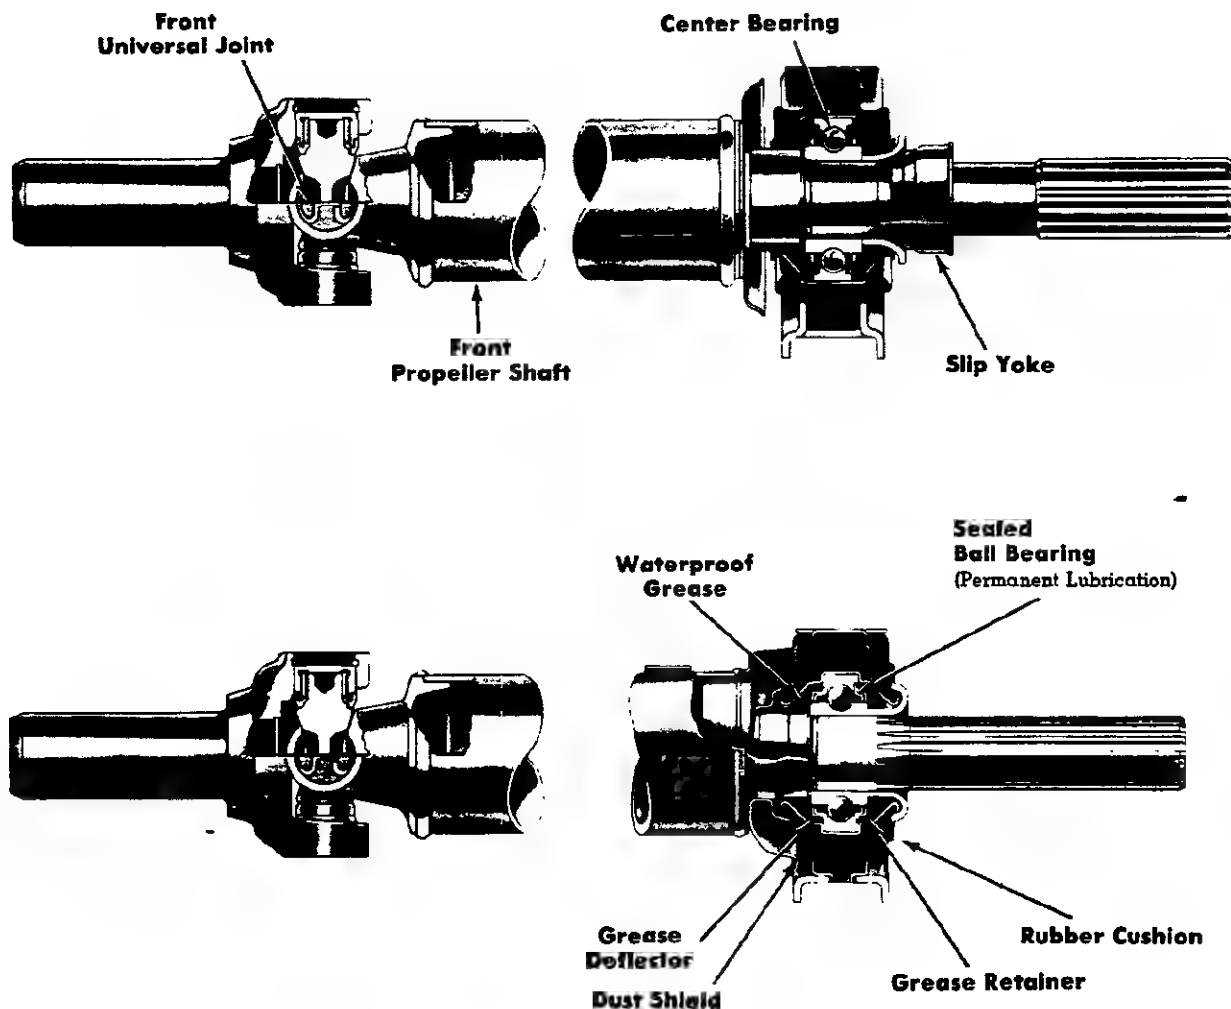


Universal Joint

Low-friction universal joints provide reserve torque capacity and efficient transfer of driving force to rear axle.

Center Bearing

Rubber-encased center bearing isolates propeller shafts, reduces transfer of possible vibrations on all models equipped with multiple propeller shafts.

CLUTCHES

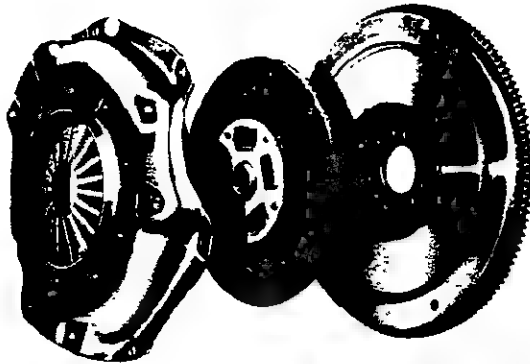

DIAPHRAGM-SPRING CLUTCHES

GM's diaphragm-spring clutches are well known for driving ease and dependability. The diaphragm spring operates with very light pedal pressure, yet directs uniformly high pressure to the pressure plate and clutch disc. Self-lubricating pilot bushing and permanently lubricated throw-out bearing require no maintenance between normal clutch overhauls.

CLUTCH APPLICATION CHART

MODEL	GVWR	ENGINE	CLUTCH SIZE		
		Liter/Cu. In.	9.13 in. dia.	11 in. dia.	12 in. dia.
Astro/Safari	All	2.5/151	X		
		4.3/262		X	
S-10/15	All	2.5/151	X		
		2.8/173	X		
C10/1500	4700-6100 6100-7000	All		X	
		4.3/262		X	
		5.0/305		X	
		5.7/350			X
		6.2/379			X
K10/1500	All	4.3/262		X	
		5.0/305		X	
		5.7/350			X
		6.2/379			X
G10/1500	All	All		X	
C-K-G-P 20/2500- 30-/3500	All	4.3/262		X	
		4.8/292		X	
		5.0/305		X	
		5.7/350			X
		6.2/379			X
		7.4/454			X

CLUTCH CONTROLS

All Light Duty G & P models use mechanical clutch controls. C/K, Astro/Safari and S-10/15 models have hydraulic operated controls.


SPECIFICATIONS

DIAPHRAGM CLUTCH			
Clutch Size (in.)	9.13	11	12
Clutch Springs	Spring steel		
Material			
Number used	1	1	1
Total pressure (lbs)	1250*	1900†	1900(a)
Driven Disc	Dry disc with two facings		
Type			
Number of plates	1		
Material	Woven composition		
Outside diameter (in.)	9.125	11	11.85
Inside diameter (in.)	6.125	6.5	6.75
Thickness (in.)	.135	.135	.140
Area (sq in.)	71.9	123.7	149.0
Bearings	Single-row ball		
Clutch-release type			
Pilot type	Sintered-powdered bronze bushing		
Flywheel Material	Nodular iron		

*1415 lbs on S-10/15 models. (a)2400 lbs with 7.4 Liter/454 V8. †1660 lbs on Astro/Safari, 2075 lbs on P20/2500-30/3500

TRANSFER CASES

FOUR-WHEEL-DRIVE TRANSFER CASE T-10/15 & SERIES K10/1500-30/3500

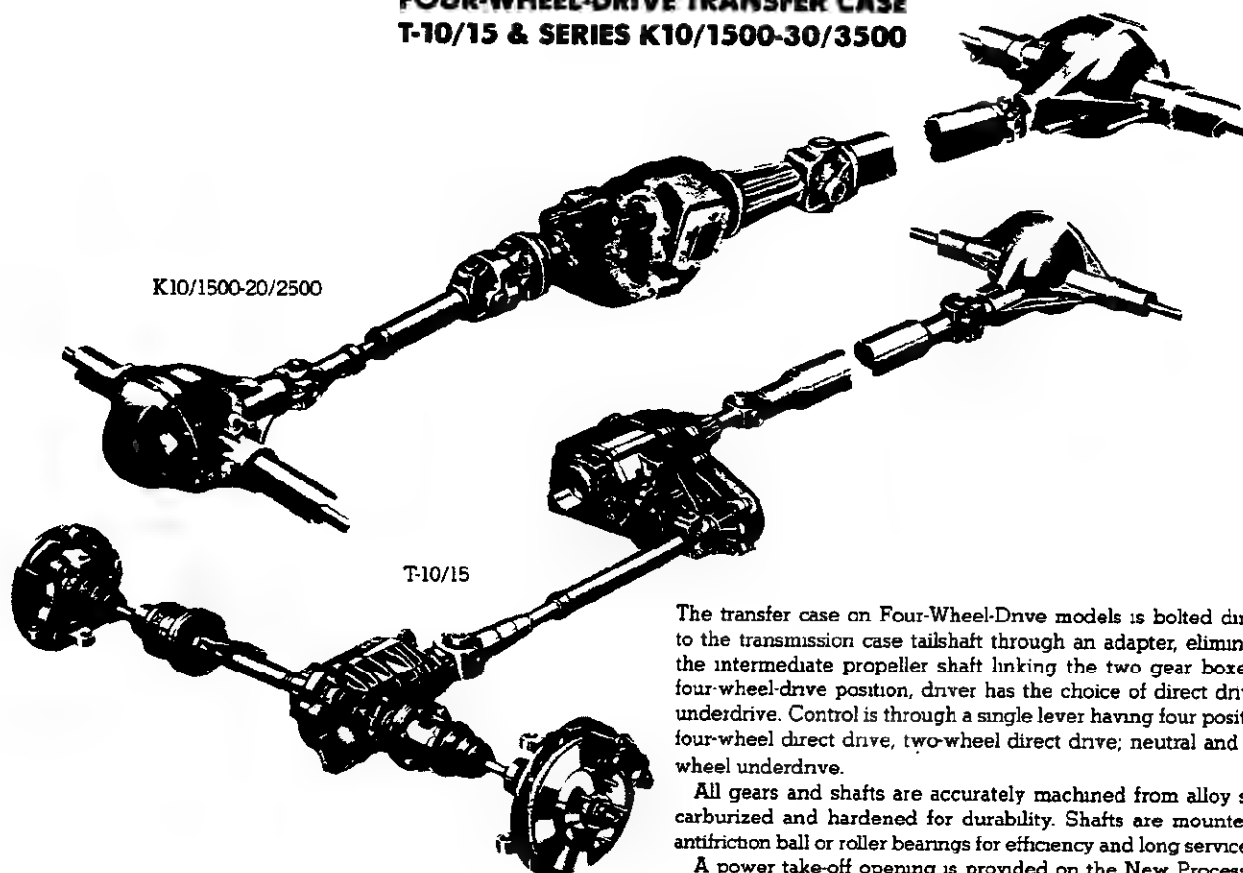

The transfer case on Four-Wheel-Drive models is bolted directly to the transmission case tailshaft through an adapter, eliminating the intermediate propeller shaft linking the two gear boxes. In four-wheel-drive position, driver has the choice of direct drive or underdrive. Control is through a single lever having four positions: four-wheel direct drive, two-wheel direct drive, neutral and four-wheel underdrive.

All gears and shafts are accurately machined from alloy steel, carburized and hardened for durability. Shafts are mounted on antifriction ball or roller bearings for efficiency and long service life.

A power take-off opening is provided on the New Process 205 Transfer Case.

Specifications


Make & Model No.	New Process 207	New Process 208	New Process 205
Availability	T-10/15	K10/1500-20/2500	K30/3500
Ratios: Hi Range Lo Range	1.00 to 1 2.61 to 1	1.00 to 1 2.61 to 1	1.00 to 1 1.96 to 1
Lever Positions	4-Lo (All wheel underdrive) N (Neutral) 2-Hi (Rear wheel drive) 4-Hi (All wheel direct drive)		
Lever Location	Rear of transmission at center of floor		
Power Take-Off Data: Opening & Location	None	None	SAE 6-bolt; Left side
Lubricants: Oil capacity	4.6 pints	5.2 pints	
Type, grade	See Owner's Guide		

ODOMETER CORRECTIONS

Speedometer drive gears are cut to the nearest full tooth when they are manufactured. This causes errors in the mileage indicated on the odometer in the vehicle when various transmission and rear axle combinations are used. Changing tires from a smaller to a larger tire size also causes errors in the indicated mileage. These errors are reduced by the use of adapters that are placed

on the speedometer gears when optional transmissions, optional rear axles or optional larger rear tires are ordered from the factory. Odometer adapter gear information and percent of error in odometer readings for the various transmission, rear axle and tire combinations can be obtained from the Zone Service Manager.

5-SPEED TRANSMISSIONS

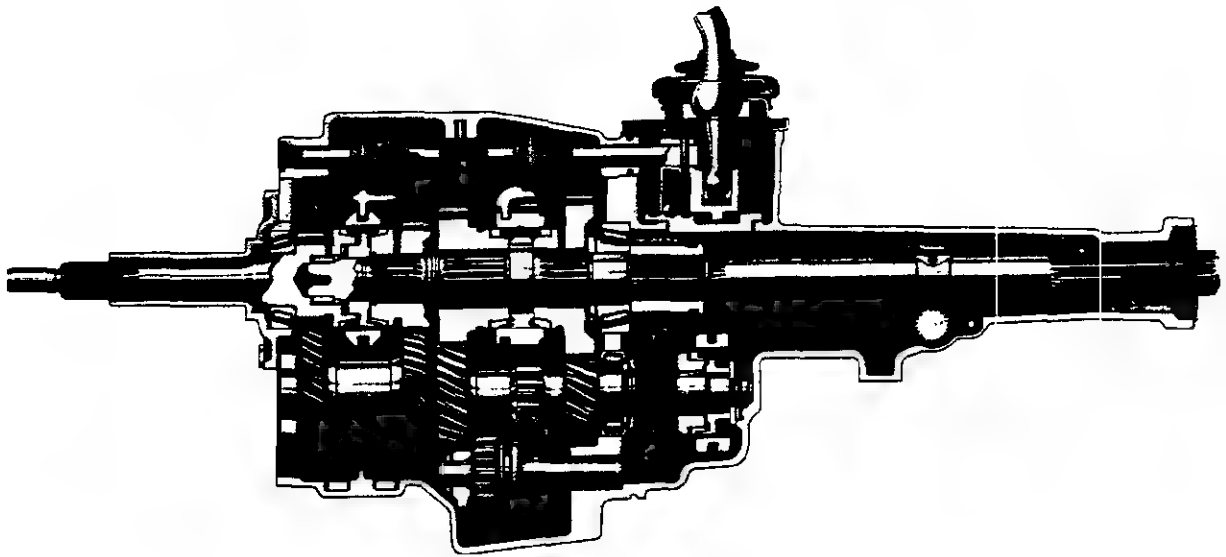

Specifications



	5-Speed w/Overdrive RPO MMS		
	M-10/15*	S-10/15 2x4 M-10/15†	S-10/15 4x4
Application			
Synchronized Speeds	1st, 2nd, 3rd, 4th & 5th (O/D)		
Gear Ratios:			
First	3.50	3.76	4.03
Second	2.14	2.18	2.37
Third	1.39	1.42	1.49
Fourth	1.00	1.00	1.00
Fifth73	.72	.72
Reverse	3.39	3.76	3.76
Gear Types:	All Forward		
Helical	Reverse		
Spur			
Center distance	77mm		
Lubricants:			
Oil Capacity (pints)	4.1		
Type, grade	See Owner's Guide		

*With 4.3 Liter engine only.

†With 2.5 Liter engine only.

4-SPEED TRANSMISSIONS

SM465

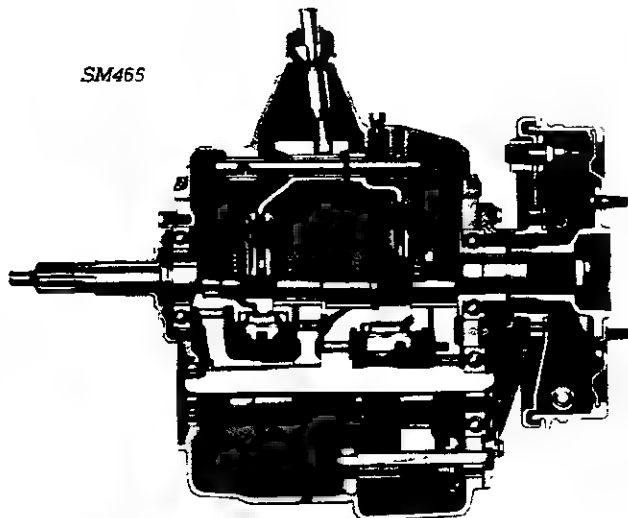

SM465
Gearshift Lever
Positions

SM465 4-SPEED

The 4-speed transmission provides constant mesh type first gear for durability and quiet operation, synchromesh gear engagement in second, third and fourth gears for clashless engagement and non-metallic coated shifter forks for quieter operation. A damper for reduced torsional gear rattle is used on models with rear wheel parking brakes.

High gear pressure angles combined with generous gear face widths resist pitting and provide greater tooth contact area.

The transmission also has heavy-duty bearings and strong rigid shafts for good reliability under extreme operating conditions. A magnet removes metallic particles from the lubricant, reducing wear to moving parts.


Series 10/1500-30/3500 models use cable-actuated rear brakes for a parking brake. P30/3500 models (except Motor Home) with the 11,000-lb rear axle use a transmission mounted internal expanding parking brake that is similar to a rear wheel brake without the wheel cylinder.

Specifications

	SM465 4-Speed RPO MM4	4-Speed RPO MM4			4-Speed w/Overdrive RPO MM7
Application	C/K10/1500- 20/3500; P20/2500- 30/3500	M10/15	S/T-10/15		C/K10/1500; G10/1500- 20/2500
Synchronized Speeds	2nd, 3rd & 4th	1st, 2nd, 3rd & 4th			1st, 2nd, 3rd & 4th (OD)
Gear Ratios:					
First	6.55	3.50	4.01	4.03	3.09
Second	3.58	2.16	2.25	2.37	1.67
Third	1.70	1.45	1.42	1.49	1.00
Fourth	1.00	1.00	1.00	1.00	.73
Reverse	6.09	3.50	3.90	3.76	3.00
Gear Types:					
Helical	All Forward Reverse				
Spur					
Power Take-Off Data:					
Opening type	SAE Std 6-Bolt	None			None
Location	Both Sides				
Drive gear	3rd Speed Countergear				
PTO gear rpm at 1000 engine rpm ..	425				
PTO Pitch Line velocity at 1000 engine rpm	560 Ft/Minute				
Center distance	117mm	76mm	77.5mm	77mm	89mm
Lubricants:					
Oil Capacity (pints) ..	8	2.4	4.8	4.1	7.5
Type, grade	See Owner's Guide				
Brakes, Parking:					
Type	Internal Expanding*	None			None
Drum diameter (in)	11.0				
Lining area (sq in)	41.8				

*Rear wheels on Series 10/1500-30/3500 and Series P30/3500 models without the 11,000-lb rear axle.

AUTOMATIC TRANSMISSIONS

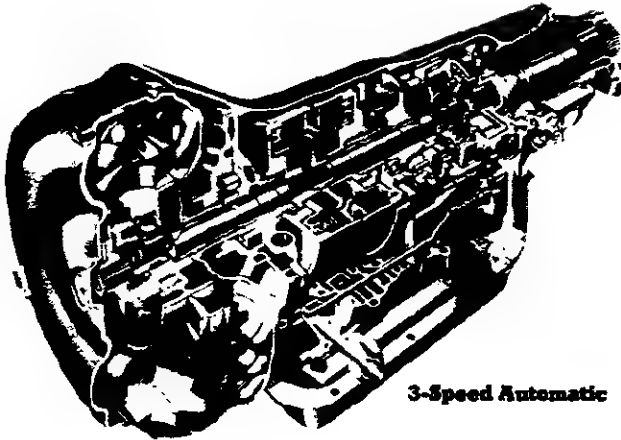

3-Speed Automatic



Typical 10/1800-30/3500 Series
Six Position Selector



4-Speed Automatic
with Overdrive



Automatic Overdrive Selector

The 3- and 4-speed automatic transmissions shown in the chart below provide excellent performance, smoothness and flexibility through a 3-element torque converter with a compound planetary gearset. The forward gear affords improved fuel economy and better performance by more efficient use of engine torque thru all ranges.

The 700R4 4-speed with overdrive includes a three-element torque converter and a converter lockup clutch. The gearbox involves an extra set of clutches and gears to provide an overdrive mode. The overall design incorporates technology for overall efficiency of operation and low weight. The 3.06 first gear produces very good acceleration characteristics, and the wide-ratio spread provides good gradability with heavier loads.

A six-position selector for the 3-speed automatic without overdrive on light-duty models provides the following ranges: Park (P), Reverse (R), Neutral (N), Drive (D), Low Two (L2), and Low One (L1). Moving the selector

to L2 locks out third gear entirely, with automatic shifting between first and second gears. The transmission is locked in low gear when L1 is selected.

The seven-position selector for the 4-speed automatic with overdrive provides the following ranges: Park (P), Reverse (R), Neutral (N), Overdrive (D), Drive (D), Low Two (2), and Low One (1). Moving the lever to the Overdrive position will allow the transmission to shift into the overdrive mode at speeds above 40 mph.

Automatic shifting schedules are controlled by a vacuum modulator instead of the mechanical linkages used in other designs. This allows smoother shifts by "sensing" engine vacuum changes.

The 475 is specifically suitable to "stop and go" type of operation such as delivery trucks. It is available on P-30/3500 models with the 10,000 lbs or 11,000 lbs capacity rear axle for the 12,000-14,500 lbs GVWR range.


Specifications

Automatic					
Model & RPO Number		350 MX1	400 MX1	475** MX1	700R4▲ MX0
Gear Ratios	First	2.52	2.48	2.48	3.06
	Second	1.52	1.48	1.48	1.63
	Third	1.00	1.00	1.00	1.00
	Fourth	—	—	—	.70
	Reverse	1.94	2.10	2.10	2.29
Gear Type	Planetary				
Torque Converter	Element Types	Pump, Stator, Turbine			
	Lock-Up Clutch	Automatic	None	None	Automatic
Lubricant Capacity	Dry Fill Refill	20 Pints 5 Pints		19 Pints 9 Pints	

**P30/3500 (32-42) models only with 10,000 or 11,000 lb. rear axle.

▲4-speed with overdrive.

3-SPEED TRANSMISSIONS

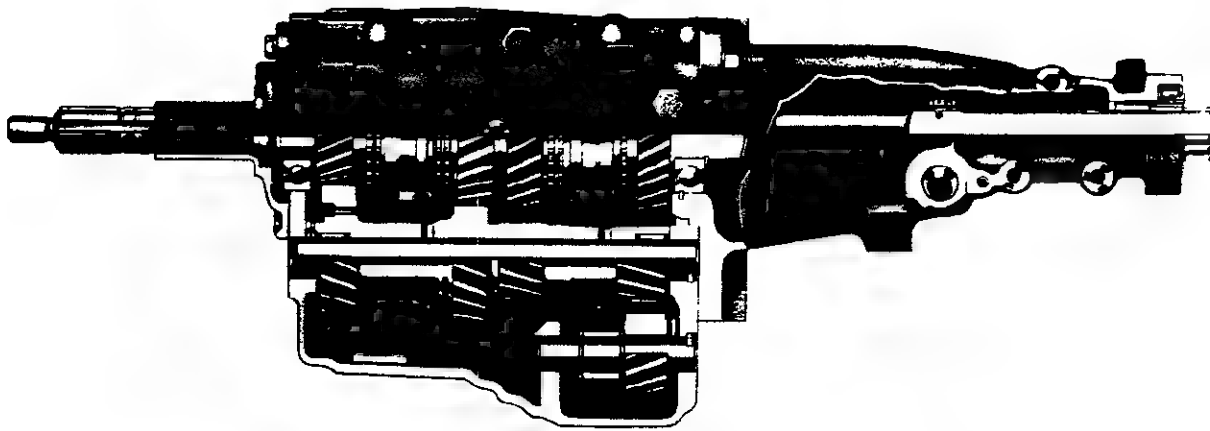

Standard 3-Speed Fully Synchronized Transmission

The 3-speed fully synchronized transmission is standard on Series G10/1500-20/2500, C10/1500 models. All forward speeds are synchronized for much better vehicle flexibility and convenience. The gearshift is located on the steering column for C Series models and on the floor for G Series.

Specifications

Type	GM 3-Speed	
	LD Muncie	
Synchronized speeds	All forward	
Center Distance	76 mm	
Engine Application	5.0L	4.3L
Gear Ratios:		
First	2.85	3.50
Second	1.68	1.89
Third	1.00	1.00
Reverse	2.95	3.62
Gears:		
Type	Helical, shot peened	
Material	Forged steel, hardened	
Lubricants:		
Capacity	3 Pints	
Type, grade	See Owner's Manual	

TRANSMISSION & DRIVELINE

INDEX

	Page
3-Speed Transmissions	2
Automatic Transmissions	3
4-Speed Transmissions	4
5-Speed Transmissions	5
Transfer Case & Odometer Corrections	6
Clutches	7
Driveline	8, 9
Power Take-Off Equipment	10

NOTES

TRANSMISSION & DRIVELINE

VALUE FEATURES

Transmissions

- Optional 3-speed automatic transmission provides greater performance, smoothness and flexibility with 3-element torque converter. Improves fuel economy and performance by more efficient use of engine torque.
- Standard 3-speed and optional 4-speed transmissions (standard on Astro/Safari) feature fully synchronized forward speeds for better vehicle flexibility and convenience.
- The 700R4 4-speed automatic transmission with overdrive is available for all CK10/1500 models and CK20/2500 models below 8500-lbs GVWR. It is standard on C10/1500 Suburban models. Featuring a mechanical locking converter clutch and a fourth-speed overdrive ratio, it offers additional fuel savings over one to one drive transmissions.
- The four-speed manual transmission with overdrive is available on C-K10/1500 Pickup models with gasoline engines, and on C-K10/1500 models equipped with the 6.2 Liter diesel engine.
- Optional 5-speed manual transmission with overdrive is available on Astro/Safari and S-10/15 models (except Chassis-Cabs).
- A 3-mode electronic speed control unit provides cruise, resume, tap-up, tap-down (1 mph increments), or accelerate in response to driver selection.

FULL-SIZE 4-WHEEL DRIVE VALUE FEATURES

- Manual locking front hubs are standard on all full-size 4-wheel-drive models, with automatic locking hubs available on all K10 models and on K20 Suburbans.
- Lightweight aluminum transfer case on all K10/1500-20/2500 4-wheel-drive models with gear synchronizers for easy shifting.


Minimum exposure of running gear

- Transmission, transfer case and drive shafts extend only slightly below body for clean appearance.

Low silhouette, high ground clearance

- Transfer case mounted directly to transmission.
- Seven inches of ground clearance.
- Low center of gravity.
- Entry heights range from 21.7" to 25.5" depending on vehicle suspension and tire size.


EMISSION CONTROL EQUIPMENT

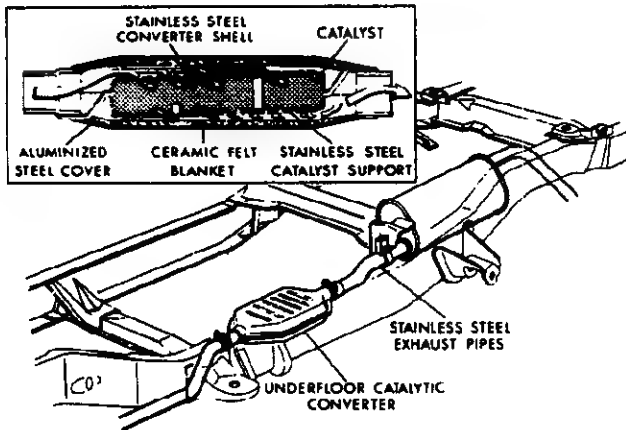


Oxidizing Converter (OC) • Catalytic bed inside converter changes hydrocarbons and carbon monoxide to harmless emissions • Shell made of stainless steel with aluminized steel cover and ceramic felt insulation between • Exhaust pipe ahead of converter also is stainless steel • Catalytic emissions control allows tuning engines for increased fuel economy, improved drivability • Use of unleaded fuel promotes spark plug life, allows longer intervals between recommended oil changes.

On El Camino/Caballero models only, the catalytic converter also contains a thin layer of Rhodium, which causes undesirable oxides of nitrogen (NO_x) to break down into acceptable emission components.

Throttle Return Control (TRC) • Reduces hydrocarbon and carbon monoxide emissions while vehicle is "coasting" • Throttle-lever actuator on carburetor opens primary venturi a pre-set amount over curb idle • Controlled by high manifold vacuum during extended overrun.

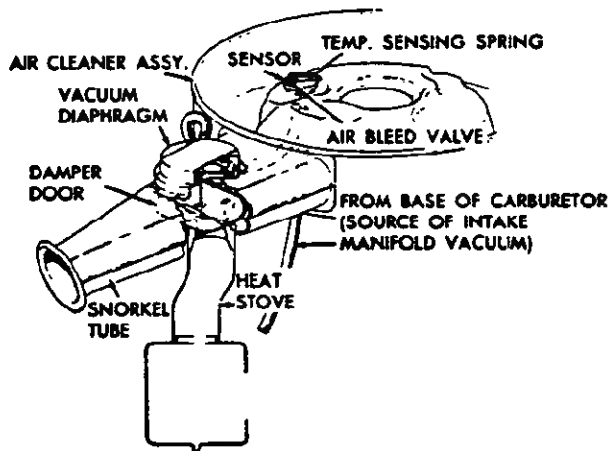


Carburetor Heated Air (CHA) • Allows significantly leaner carburetor calibration for reduced emissions • Heats carburetor air to 100°F when under-hood temperatures are lower • Damper door from exhaust manifold heat stove regulates heated air • Controlled by engine vacuum or bi-metallic thermostat • Minimizes carburetor icing and improves engine drivability during warm-up cycle.

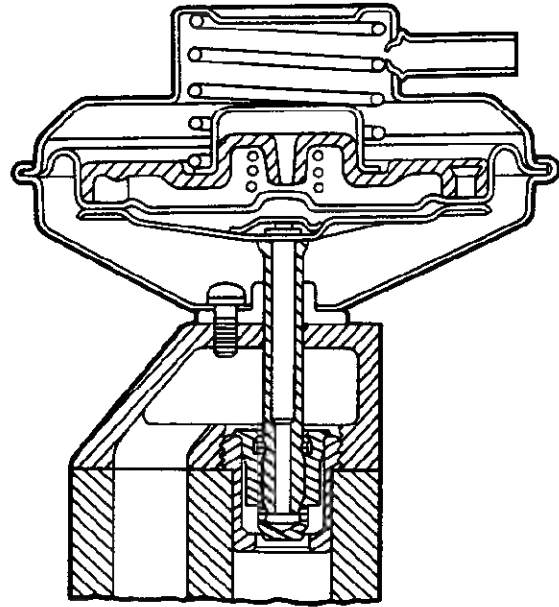

Exhaust Gas Recirculation (EGR) • Introduces exhaust gases to engine induction system through passages cast into intake manifold • Lowers combustion temperatures, reduces formation of nitrogen oxide • Controlled by manifold vacuum and exhaust back pressure • Normally closed at idle.

- QUICKER ENGINE WARM UP
- IMPROVED DRIVEABILITY
- REDUCED EMISSIONS FOR WARM UP CYCLE

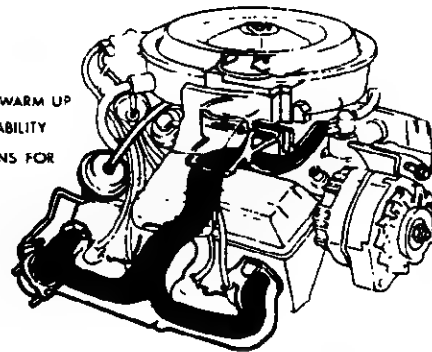


Early Fuel Evaporation (EFE) • Reduces exhaust emissions by preheating incoming fuel for improved combustion on L6 and V8 models • During cold starts, vacuum motor immediately closes exhaust manifold heat valve • Hot exhaust gases flow around inlet manifold and heat incoming fuel • More complete fuel evaporation during warm-up improves drivability • On L4 and V6 models, an electric heating element located under the carburetor achieves the same as above.

EMISSION CONTROL EQUIPMENT


GENERAL

Exhaust emissions are controlled on all gasoline powered truck models. The system employed is the Air Injection Reactor (A.I.R.). This system employs aluminized exhaust system components.

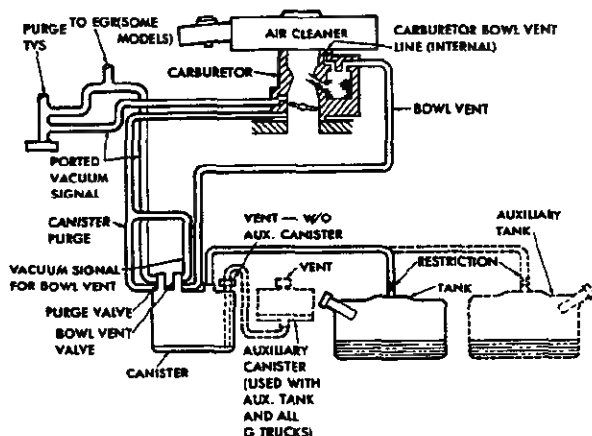

EVAPORATIVE EMISSION CONTROLS


All Series Truck models under 8501 lbs. GVWR (classified as Light Duty emission by the Environmental Protection Agency (EPA)), must include equipment to control fuel vapor emissions. The State of California also requires evaporative emission control for the other Series 1-2-3 models classified as Heavy Duty emission (over 8500 lbs. GVWR). Basically this system starts at the fuel tank by extending a line from the metering unit to the vapor storage canister. The metering unit is an integral unit which, in addition to fuel pickup and gage registration, provides: (a) Outlet for vapor to canister; (b) Fill limiting function, fuel fill venting, (c) Separation of vapor from liquid fuel and fuel return line inlet. A single line carries the vapors to a canister which stores the vapors when the engine is not running, but distributes the vapors to the carburetor when the engine is running. Emissions from the carburetor are reduced by providing an insulator below the carburetor to control the float bowl temperature. On El Camino/Caballero models, and on C, K and G V8 engine models, carburetor fuel vapors are collected in an air cleaner carbon ring when the engine is not running.

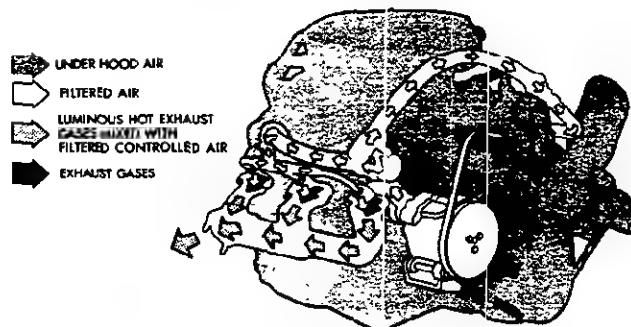

AIR INJECTION REACTOR (A.I.R.)

With this system, emissions of unburned hydrocarbons and carbon monoxide are controlled to levels specified by the Federal Motor Vehicle Air Pollution Control Act by injection of air into each exhaust valve port or into exhaust system before the converter. This provides oxygen to support combustion of the luminous hot exhaust gases and continues oxidation of unburned hydrocarbons and carbon monoxide in the exhaust system.

The system is comprised of an air pump, diverter valve and silencer, check valves, air manifold, thermostatically controlled air cleaner and modifications to the carburetor and ignition distributor. Air for injection into the exhaust manifold is provided by a crankshaft-driven semi-articulated vane-type pump. Inlet air is cleaned by means of a centrifugal vane unit which separates dust particles and water from the air. The diverter valve functions as a pressure limiting valve which maintains a constant flow of air to the exhaust manifold. Check valves, one on six-cylinder engines and two on eight-cylinder engines, operate to prevent backflow of exhaust gases in event of pump or drive belt failure.



POSITIVE CRANKCASE VENTILATION (PCV)

All gasoline engines are equipped with PCV. This system prevents any crankcase emission being discharged into the atmosphere. It primarily consists of a completely sealed crankcase with a PCV valve and connections that returns blow-by gases to the combustion chamber where they are burned.

EMISSION CONTROL EQUIPMENT

Light-Duty Emissions Systems (8500 lbs. GVWR and under)																		
Engine	RPO	Application	PCV	EGR	ECS	EFE	CHA	OC*	AIR	TVSS	DFI	ESC	CDR	CL	ORC	EPR	SEGR	MEGR
2.5 Liter 151 L4 EFI	LN8	Federal	X	X	X		X	X	X					X				
		California	X	X	X		X		X					X	X			
2.8 Liter 173 V6 2-bbl	LL2	Federal	X	X	X		X	X	X									
		California	X	X	X		X		X					X	X			
4.3 Liter 262 V6 4-bbl	LB1	Federal	X	X	X	X	X	X	X	X								
		California	X	X	X	X	X		X	X				X	X			
4.3 Liter 262 V6 EFI	LB4	Federal	X	X	X		X	X	X†					X				
		California	X	X	X		X		X					X	X			
5.0 Liter 305 V8 4-bbl	LE9	Federal	X	X	X	X	X	X	X	X		X						
		California				Not Offered												
5.0 Liter 305 V8 4-bbl	LF3	Federal				Not Offered												
		California	X	X	X	X	X		X	X				X	X			
5.7 Liter 350 V8 4-bbl	LS9	Federal	X	X	X	X	X	X	X	X								
		California	X	X	X	X	X		X	X				X	X			
6.2 Liter 379 V8 Diesel	LH6	Federal									X		X			X	X	
		California									X		X			X		X

*"Federal" indicates required Emission Systems in all states except California;

"California" refers to equipment required for California only

* Not used on Step-Van/Value Van or FC Chassis

†AIR used only with manual transmission

Heavy-Duty Emissions Systems (Over 8500 lbs. GVWR)												
Engine	RPO	Application	PCV	EFE	ECS	EGR	CHA	AIR	TVSS	ISS	DFI	CDR
4.8 Liter 292 L6 1-bbl	L25	Nationwide	X	X	X		X	X	X	X		
5.7 Liter 350 V8 4-bbl	LT9	Federal	X	X	X	X	X	X†	X	X		
		California	X	X	X	X	X	X	X			
6.2 Liter 379 V8 Diesel	LL4	Nationwide									X	X
7.4 Liter 454 V8 4-bbl	LE8	Federal	X	X	X	X	X	X†	X	X		
		California	X	X	X	X	X	X	X			

†Two air pumps used

PCV—Positive Crankcase Ventilation

EGR—Exhaust Gas Recirculation

ECS—Evaporation Control System

EFE—Early Fuel Evaporation

CHA—Carburetor Heated Air

CDR—Crankcase Depression Regulator

OC—Oxidizing Converter

SEGR—Switched Exhaust Gas Recirculation

AIR—Air Injection Reactor System

TVSS—Trapped Vacuum Spark System

ISS—Idle Stop Solenoid

DFI—Diesel Fuel Injection

ESC—Electronic Spark Control

CL—Closed Loop

ORC—Oxidizing-Reducing Converter

EPR—Exhaust Pressure Regulator

MEGR—Modulated Exhaust Gas Recirculation

EPA ESTIMATED MILEAGE LABELS

The Environmental Protection Agency now publishes estimated mileage figures for all vehicles up to 8500 lbs. GVWR. EPA mileage figures are not available for trucks over 8500 lbs. GVWR.

EPA ratings are *estimates*. The actual mileage you get will vary depending on the type of driving you do, your driving habits, your truck's condition and available equipment.

GM truck models which are rated at 8500 lbs. GVWR or below will

have an EPA Fuel Economy Label affixed to the inside of the front passenger door window, readable from the outside of the vehicle. This label will list the estimated miles per gallon. It will also list that particular vehicle's VIN number, vehicle name, number of cylinders, engine displacement, carburetor (number of barrels), and type of transmission (manual or automatic).

GM light-duty trucks which will display this label are

Astro/Safari

5-10/15 Models

El Camino/Caballero

C10/1500 Pickups, Suburbans and Blazer/Jimmy

C20/2500 Pickup†

K10/1500 Pickup, Suburban and Blazer/Jimmy

K20/2500 Pickup†

G10/1500-20/2500 Sportvan/Rally, Chevy Van/Vandura

G30/3500 Sportvan/Rally @ 7400-lb. GVWR

G30/3500 Chevy Van/Vandura @ 7100-lb. GVWR

†Without C6P Heavy-Duty Chassis.

FUEL TANKS

SPECIFICATIONS

Series	Tank Location	Std/ Opt	Approx. Tank Cap. (gallons)	Filler Location	Description
†Blazer/Jimmy; Pickups; Suburban; Chassis-Cab Models					
El Camino/Caballero	Behind rear axle	Std	17.7	Left Side	Rectangular
		Opt	22	Left Side	Rectangular
S-10/15 Models	Inboard LH frame rail	Std	13.2	Left Side	Rectangular
		Opt	20.0	Left Side	Step-shape Rectangle
K10/1500 Blazer/Jimmy	Inboard frame behind rear axle	Std	■25	Right Side (Rear)	Rectangular
		Opt	♦31	Right Side (Rear)	Rectangular
C/K10/1500-20/2500 Suburban	Inboard frame behind rear axle	Std	■25	Right Side (Rear)	Rectangular
		Opt	♦31	Right Side (Rear)	Rectangular
		Opt	★40	Right Side (Rear)	Rectangular
C/K10703	Outboard LH frame rail	Std	16	Left Center	Step-shape Rectangle
	Outboard RH frame rail	Opt	16	Right Center	Step-shape Rectangle
C/K10903 C/K20903-43 C/K30903-43 C/K31003, C/K31403	Outboard LH frame rail	Std	20	Left Center	Step-shape Rectangle
	Outboard RH frame rail	Opt	●20	Right Center	Step-shape Rectangle
†Astro/Safari; Chevy Van/Vandura; Sportvan/Rally; Cutaway Van; Hi-Cube Van					
Astro/Safari	Between frame rails forward of rear axle	Std	17	Left Side	Rectangular
		Opt	27	Left Side	Rectangular
G10/1500-20/2500; G30/3500 (06)	Between frame rails behind rear axle	Std	22	Left Rear	Rectangular
		Opt	33	Left Rear	Rectangular
G30/3500 (05)	Between frame rails behind rear axle	Std	22	Left Rear	Rectangular
		Opt	33	Left Rear	Rectangular
G30/3500 (03)	Between frame rails behind rear axle	Std	22	Left Rear	Rectangular
		Opt**	33	Left Rear	Rectangular
Forward Control Models					
P20/2500; P30/3500	Between frame rails behind rear axle	Std	40	Left Rear	Rectangular
P30/3500 Motor Home Chassis*	Between frame rails behind rear axle	Std	40	Left Rear	Rectangular

*P30/3500 Motor Home Chassis has temporary 5 qt fuel tank connected for shipping purposes.

**Std on RV Cutaway Van.

†All Light Duty Emissions and California Heavy Duty Emission vehicles are equipped with evaporative emission controls.

■ Approximately 27 gallons with 6.2 Liter diesel engine.

♦ Approximately 32 gallons with 6.2 Liter diesel engine

★ Approximately 41 gallons with 6.2 Liter diesel engine.

● When C-K10903 and K20903 models below 8500 lbs. GVWR are ordered with auxiliary fuel tank RPO NL2, the base tank and the auxiliary tank have an approximate capacity of 16 gal. each (total approximately 32 gal.).

COOLING SYSTEMS

OPTIONAL COOLING SYSTEMS (Continued)

§TUBE AND CENTER CROSS-FLOW-TYPE RADIATOR WITH
MULTILOUVER DESIGN AND 15 LB. PRESSURE CAP.

Series	Optional Combinations			Radiator			System Capacity (gal.) ★	Fan (No. blades x diam x pitch)
	Engine (Liter/ Cu. In.)	Option	Transmission Type	Thick-ness (in.)	Dist. Between Tubes (Const.) (in.)	Frontal Area (sq. in.)		
G30/3500 (Con't)	7.4/454		Automatic	2.17	.12	537	6.1	5 x 19.5 x 2.18 ■
		HD Radiator	Manual	1.57	.12	537	5.4	5 x 19.5 x 2.18 ■
		Air Conditioning, Trans. Oil Cooler	Manual	2.17	.14	537	5.4	7 x 19.5 x 2.87 ■ ♦
			Automatic	2.17	.12	537	6.0	7 x 19.5 x 2.87 ■ ♦
	6.2/379		Automatic	2.17	.14	646	6.2	5 x 20 x 2.87 ■
		Air Conditioning, Trans. Oil Cooler	Manual	2.17#	.145	646	6.2	5 x 20 x 2.87 ■
			Automatic	2.17	.12	646	6.2	5 x 20 x 2.87 ■
G30/3500 (05) w/o C6P	4.3/262		Automatic	.93	.14	352	3.4	3 x 19 x 2.66 ■
		Air Conditioning, HD Cooling	Manual	.93	.14	358	3.3	5 x 19.5 x 2.18 ■
			Automatic	.93	.10	358	3.3	5 x 19.5 x 2.18 ■
		Engine Oil Cooler & Trans. Oil Cooler	Automatic	1.57	.12	352	3.4	3 x 19 x 2.66 ■
G30/3500 (06) w/o C6P G30/3500/ C6P(05,06)	5.7/350		Automatic	.98	.12	479	4.2	5 x 19.5 x 2.18 ■
		Air Conditioning, HD Cooling	Automatic	1.57	.12	479	4.2	5 x 19.5 x 2.18 ■
		Engine Oil Cooler & Trans. Oil Cooler	Automatic	1.57	.10	479	4.5	5 x 19.5 x 2.18 ■
		Trans. Oil Cooler	Automatic	1.57	.10	479	4.2	5 x 19.5 x 2.18 ■
	6.2/379	Air Conditioning	Automatic	2.17	.10	479	6.2	5 x 20 x 2.87 ■
G30/3500 (03-32)	5.7/350	Air Conditioning, HD Cooling	Automatic	1.57	.12	479	4.2	5 x 19.5 x 2.18 ■
		Engine Oil Cooler & Trans. Oil Cooler	Automatic	1.57	.10	479	4.5	5 x 19.5 x 2.18 ■
		Trans. Oil Cooler	Automatic	1.57	.10	479	4.2	5 x 19.5 x 2.18 ■
	6.2/379	Air Conditioning	Automatic	2.17	.10	479	6.2	5 x 20 x 2.87 ■
K30/3500	4.8/292		Automatic	1.57	.16	445	3.8	3 x 19 x 2.56 ■
		HD Radiator	Manual	.98	.12	445	3.8	3 x 19 x 2.56 ■
		Air Conditioning	Manual	1.57	.16	479	3.9	5 x 19.5 x 2.18 ■
			Automatic	1.57	.14	479	3.8	5 x 19.5 x 2.18 ■
	5.7/350		Automatic	1.57	.16%	537	4.3	3 x 19 x 2.71 ■
		HD Radiator	Manual	.98(b)	.12(a)%	479	4.3	3 x 19 x 2.71 ■
		Air Conditioning, Trans. Oil Cooler	Manual	.98(b)	.12(a)%	479	4.3	5 x 19.5 x 2.18 ■
			Automatic	1.57	.16%	537	4.3	5 x 19.5 x 2.18 ■
	7.4/454		Automatic	2.17	.12	537	6.1	5 x 19.5 x 2.18 ■
		HD Radiator	Manual	1.57	.12	537	5.4	5 x 19.5 x 2.18 ■
		Air Conditioning, Trans. Oil Cooler	Manual	2.17	.14	537	6.2	7 x 19.5 x 2.87 ■ ♦
			Automatic	2.17	.12	537	6.1	7 x 19.5 x 2.87 ■ ♦
	6.2/379		Automatic	2.17	.14	646	6.2	5 x 20 x 2.87 ■
		Air Conditioning, Trans. Oil Cooler	Manual	2.17(c)	.145	646	6.2	5 x 20 x 2.87 ■
			Automatic	2.17	.12	646	6.2	5 x 20 x 2.87 ■
P30/3500 (Except Motor Home Chassis)	4.8/292	Air Conditioning HD Radiator	Manual	.98	.16	479	3.5	5 x 19.5 x 2.18 ■
	5.7/350		Automatic	1.57	.12	479	3.9	5 x 19.5 x 2.18 ■
		Air Conditioning HD Radiator	Manual	1.57	.16	537	4.0	5 x 19.5 x 2.18 ■
			Automatic	1.57	.12	537	3.9	5 x 19.5 x 2.18 ■
	6.2/379		Automatic	1.57	.12	646	6.1	5 x 19.7 x 2.88 ■

★ Capacity (approx.) shown with standard heater (except P20-30 models) and standard coolant recovery system.

■ Temperature-controlled clutch fan. ♦ RPM controlled flex fan. (a) 16 with 4.10 axle ratio. % 14 with 4.56 axle ratio.

(b) 1.57 with 4.10, 4.56 axle ratio. (c) 1.57 with 3.42, 3.73 axle ratio. \$.12 with 3.42, 3.73 axle ratio.

§ All models with automatic transmissions include a transmission oil cooler integral with the radiator. # 1.57 with 3.42, 3.73 axle ratio.

COOLING SYSTEMS

OPTIONAL COOLING SYSTEMS (Continued)

§ TUBE AND CENTER CROSS-FLOW-TYPE RADIATOR WITH
MULTILOUVER DESIGN AND 15 LB. PRESSURE CAP.

Series	Optional Combinations			Radiator			System Capacity (gal.) yr	Fan (No. blades x diam. x pitch)
	Engine (Liter/Cu. In.)	Option	Transmission Type	Thickness (in.)	Dist. Between Tubes (Const.) (in.)	Frontal Area (sq. in.)		
G20/2500 (Con't)	5.0/305		Automatic	.98	.12	479	4.2	3 x 19 x 2.66 ■
		Air Conditioning, HD Cooling	Manual	.98	.16	479	4.3	5 x 19.5 x 2.18 ■
			Automatic	.98	.12	479	4.2	5 x 19.5 x 2.18 ■
		Engine Oil Cooler & Trans. Oil Cooler	Automatic	1.57	.10	479	4.5	3 x 19 x 2.66 ■
	5.7/350	Trans. Oil Cooler	Automatic	1.57	.10	479	4.2	3 x 19 x 2.66 ■
			Automatic	.98	.12	479	4.2	3 x 19 x 2.68 ■
		Air Conditioning, HD Cooling	Automatic	1.57	.16	479	4.2	5 x 19.5 x 2.18 ■
		Engine Oil Cooler & Trans. Oil Cooler	Automatic	1.57	.10	479	4.5	3 x 19 x 2.68 ■
	6.2/379	Trans. Oil Cooler	Automatic	1.57	.10	479	4.2	3 x 19 x 2.68 ■
			Automatic	1.57	.12	479	6.2	5 x 20 x 2.87 ■
		Air Conditioning, HD Cooling	Manual	1.57	.12	479	6.3	5 x 20 x 2.87 ■
			Automatic	1.57	.12	479	6.2	5 x 20 x 2.87 ■
K20/2500	4.8/292	HD Radiator	Manual	.98	.12	445	3.8	3 x 19 x 2.56 ■
		Air Conditioning	Manual	1.57	.16	479	3.9	5 x 19.5 x 2.18 ■
	5.7/350		Automatic	1.57	.16†	537	4.3	3 x 19 x 2.56 ■
		HD Radiator	Manual	.98	.12(a)%	479	4.3	3 x 19 x 2.56 ■
		Air Conditioning	Manual	.98	.12(a)%	479	4.3	5 x 19.5 x 2.18 ■
			Automatic	1.57	.16%	537	4.3	5 x 19.5 x 2.18 ■
	6.2/379 LH6	Trans. Oil Cooler	Automatic	1.57	.16%	537	4.3	3 x 19 x 2.56 ■
			Automatic	1.57	.16+	646	6.2	5 x 20 x 2.87 ■
		Air Conditioning	Manual	1.57	.16	646	6.2	5 x 20 x 2.87 ■
			Automatic	1.57††	.12@	646	6.2	5 x 20 x 2.87 ■
	6.2/379 LL4	Trans. Oil Cooler	Automatic	1.57††	.12	646	6.2	5 x 20 x 2.87 ■
			Automatic	2.17	.14	646	6.2	5 x 20 x 2.87 ■
		Air Conditioning, Trans. Oil Cooler	Manual	2.17#	.14\$	646	6.2	5 x 20 x 2.87 ■
			Automatic	2.17	.12	646	6.2	5 x 20 x 2.87 ■
P20/2500	4.8/292	Air Conditioning, HD Radiator	Manual	.98	.16	479	3.5	5 x 19.5 x 2.18 ■
	5.7/350		Automatic	1.57	.12	479	3.9	5 x 19.5 x 2.18 ■
		Air Conditioning, HD Radiator	Manual	1.57	.16	537	4.0	5 x 19.5 x 2.18 ■
			Automatic	1.57	.12	537	3.9	5 x 19.5 x 2.18 ■
	6.2/379		Automatic	1.57	.12	646	6.1	5 x 19.7 x 2.88 ■
C30/3500	4.8/292		Automatic	1.57	.16	445	3.8	3 x 19 x 2.56 ■
		HD Radiator	Manual	.98	.12	445	3.8	3 x 19 x 2.56 ■
		Air Conditioning	Manual	1.57	.16	479	3.9	5 x 19.5 x 2.18 ■
			Automatic	1.57	.14	479	3.8	5 x 19.5 x 2.18 ■
	5.7/350		Automatic	1.57	.16%	537	4.3	3 x 19 x 2.71 ■
		HD Radiator	Manual	.98(b)	.12(a)%	479	4.3	3 x 19 x 2.71 ■
		Air Conditioning, Trans. Oil Cooler	Manual	.98(b)	.12(a)%	479	4.3	5 x 19.5 x 2.18 ■
			Automatic	1.57	.16%	537	4.3	5 x 19.5 x 2.18 ■

★ Capacity (approx.) shown with standard heater (except P20-30 models) and standard coolant recovery system.

■ Temperature-controlled clutch fan. †.14 with 4.56 axle ratio. ††2.17 with 3.73 axle ratio.

(a).16 with 4.10 axle ratio. % .14 with 4.56 axle ratio. (b) 1.57 with 4.10, 4.56 axle ratio.

\$.12 with 3.42, 3.73 axle ratio. @.14 with 3.73 axle ratio. #1.57 with 3.42, 3.73 axle ratio. • .12 with 3.73 axle ratio.

§ All models with automatic transmissions include a transmission oil cooler integral with the radiator.

COOLING SYSTEMS

OPTIONAL COOLING SYSTEMS (Continued)

§TUBE AND CENTER CROSS-FLOW-TYPE RADIATOR WITH
MULTILOUVER DESIGN AND 15 LB. PRESSURE CAP.

Series	Optional Combinations			Radiator			System Capacity (gal) ★	Fan (No blades x diam x pitch)
	Engine (Liter/Cu. In.)	Option	Transmission Type	Thickness (in)	Dist. Between Tubes (Const) (in)	Frontal Area (sq in)		
K10/1900 (Con't)	6.2/379	Air Conditioning	Manual	1.57	.16	646	6.2	5 x 20 x 2.87 ■
			Automatic	1.57*	.12@	646	6.2	5 x 20 x 2.87 ■
		Trans. Oil Cooler	Automatic	1.57	.12	646	6.2	5 x 20 x 2.87 ■
		Air Conditioning, Trans. Oil Cooler	Automatic	1.57*	.12	646	6.2	5 x 20 x 2.87 ■
C20/2500	4 3/262		Automatic	.93	.14	358	3.4	3 x 19 x 2.56 ■
			HD Radiator	.93	.14	358	3.4	3 x 19 x 2.56 ■
		Air Conditioning	Manual	.93	.14	358	3.4	5 x 19 x 2.18 ■
			Automatic	.93	.10	358	3.4	5 x 19 x 2.18 ■
	4 8/292	HD Radiator	Manual	.98	.12	445	3.8	3 x 19 x 2.56 ■
		Air Conditioning	Manual	1.57	.16	479	3.9	5 x 19.5 x 2.18 ■
	5.0/305		Automatic	.98†	.12†	537	4.2	3 x 19 x 2.56 ■
			HD Radiator	.98	.12	479	4.2	3 x 19 x 2.56 ■
		Air Conditioning	Manual	.98	.16*	479	4.2	5 x 19.5 x 2.18 ■
			Automatic	.98	.12	537	4.2	5 x 19.5 x 2.18 ■
	5 7/350	Trans. Oil Cooler	Automatic	1.57	.16	537	4.2	3 x 19 x 2.56 ■
			Automatic	1.57	.16†	537	4.3	3 x 19 x 2.56 ■
			HD Radiator/LT9	.98*	.12‡	479	4.3	3 x 19 x 2.71 ■
		Air Conditioning/LS9	Automatic	1.57	.16	537	4.3	5 x 19.5 x 2.18 ■
	7.4/454		Manual	.98*	.12‡	479	4.3	5 x 19.5 x 2.18 ■
			Automatic	1.57	.16▲	537	4.3	5 x 19.5 x 2.18 ■
		Trans. Oil Cooler	Automatic	1.57	.16▲	537	4.3	3 x 19 x 2.56 ■
			Automatic	2.17	.12	537	6.1	5 x 19.5 x 2.18 ■
	6.2/379 LH6		Manual	1.57	.12	537	5.4	5 x 19.5 x 2.18 ■
			Automatic	2.17	.14	537	5.4	7 x 19.5 x 2.87 ■◆
		Air Conditioning	Manual	2.17	.12	537	6.1	7 x 19.5 x 2.87 ■◆
			Automatic	1.57	.16*	646	6.2	5 x 20 x 2.87 ■
	6 2/379 LL4		Manual	1.57	.16	646	6.2	5 x 20 x 2.87 ■
			Automatic	1.57††	.12@	646	6.2	5 x 20 x 2.87 ■
		Trans. Oil Cooler	Automatic	1.57	.12	646	6.2	5 x 20 x 2.87 ■
			Automatic	2.17	.14	646	6.2	5 x 20 x 2.87 ■
G20/2500	4.3/262		Automatic	2.17#	.14§	646	6.2	5 x 20 x 2.87 ■
			Automatic	2.17	.12	646	6.2	5 x 20 x 2.87 ■
		Air Conditioning, HD Cooling	Manual	.93	.14	358	3.3	5 x 19.5 x 2.18 ■
			Automatic	.93	.10	358	3.3	5 x 19.5 x 2.18 ■
G20/2500	4.3/262		Automatic	1.57	.12	352	3.4	3 x 19 x 2.66 ■
			Automatic	.93	.14	358	3.4	3 x 19 x 2.66 ■
		Engine Oil Cooler & Trans. Oil Cooler	Automatic	.93	.10	358	3.3	5 x 19.5 x 2.18 ■
			Automatic	1.57	.12	352	3.4	3 x 19 x 2.66 ■

★ Capacity (approx.) shown with standard heater and standard coolant recovery system.

■ Temperature-controlled clutch fan. ◆ RPM controlled flex fan. #1.57 with 3.42, 3.73 axle ratio @ 14 with 3.73 axle ratio
• .12 with 3.73 axle ratio. ††2.17 with 3.73 axle ratio. §.12 with 3.42, 3.73 axle ratio †.14 with 4.56 axle ratio.

*1.57 with 4.10, 4.56 axle ratio ‡.16 with 4.10 axle ratio; .14 with 4.56 axle ratio. ▲.14 with 4.56 axle ratio

§ All models with automatic transmissions include a transmission oil cooler integral with the radiator.

COOLING SYSTEMS

OPTIONAL COOLING SYSTEMS (Continued)

§TUBE AND CENTER CROSS-FLOW-TYPE RADIATOR WITH
MULTILOUVER DESIGN AND 15 LB. PRESSURE CAP.

Series	Optional Combinations			Radiator			System Capacity (gal) ★	Fan (No. blades x diam x pitch)
	Engine (Liter/Cu. In.)	Option	Transmission Type	Thick-ness (in)	Dist. Between Tubes (Const) (in)	Frontal Area (sq in)		
C10/1500 (Can't)	5.7/350		Automatic	.98#	.14▲	479	4.2	3 x 19 x 2.56■
		HD Radiator	Automatic	1.57@	.16@	537	4.3	3 x 19 x 2.56■
		HD Radiator, Trans. Oil Cooler	Automatic	1.57	.16@	537	4.3	3 x 19 x 2.56■
		Air Conditioning, Trans. Oil Cooler	Automatic	1.57	.14	537	4.3	5 x 19.5 x 2.18■
		Air Conditioning	Automatic	1.57	.16@	537	4.3	5 x 19.5 x 2.18■
	6.2/379	Air Conditioning	Manual	1.57	.16*	646	6.2	5 x 20 x 2.87■
			Automatic	1.57*	.12@	646	6.2	5 x 20 x 2.87■
		Trans. Oil Cooler	Automatic	1.57	.12	646	6.2	5 x 20 x 2.87■
G10/1500	4.3/262		Automatic	.93	.14	358	3.4	3 x 19 x 2.66■
		Air Conditioning, HD Cooling	Manual	.93	.14	358	3.3	5 x 19.5 x 2.18■
			Automatic	.93	.10	358	3.3	5 x 19.5 x 2.18■
	5.0/305		Automatic	.98	.16	479	4.2	3 x 19 x 2.66■
		Air Conditioning, HD Cooling	Manual	.98	.16	479	4.3	5 x 19.5 x 2.18■
			Automatic	.98	.12	479	4.2	5 x 19.5 x 2.18■
		Trans. Oil Cooler	Automatic	1.57	.10	479	4.2	5 x 19.5 x 2.18■
	5.7/350		Automatic	.98	.16	479	4.2	3 x 19 x 2.68■
		Air Conditioning, HD Cooling	Automatic	1.57	.16	479	4.2	5 x 19.5 x 2.18■
		Trans. Oil Cooler	Automatic	1.57	.10	479	4.2	5 x 19.5 x 2.18■
K10/1500	4.3/262		Automatic	.93	.14	358	3.4	3 x 19 x 2.56■
		HD Radiator	Manual	.93	.14	358	3.4	3 x 19 x 2.56■
			Automatic	.93	.10	358	3.4	3 x 19 x 2.56■
		Air Conditioning	Manual	.93	.14	358	3.4	5 x 19 x 2.18■
			Automatic	.93	.10	358	3.4	5 x 19 x 2.18■
		Trans. Oil Cooler	Automatic	1.57	.14	352	3.4	3 x 19 x 2.56■
	5.0/305	Trans. Oil Cooler Engine Oil Cooler	Automatic	1.57	.12	352	3.4	3 x 19 x 2.56■
			Automatic	.98	.16	479	4.2	3 x 19 x 2.56■
		HD Radiator	Manual	.98	.12	479	4.2	3 x 19 x 2.56■
			Automatic	.98#	.12▲	537	4.2	3 x 19 x 2.56■
		Air Conditioning	Manual	.98	.16*	479	4.2	5 x 19.5 x 2.18■
			Automatic	.98	.12	537	4.2	5 x 19.5 x 2.18■
	5.7/350	Trans. Oil Cooler	Automatic	1.57	.16	537	4.2	3 x 19 x 2.56■
			Automatic	.98#	.14▲	479	4.3	3 x 19 x 2.56■
		HD Radiator	Manual	1.57	.16	479	4.3	3 x 19 x 2.56■
			Automatic	1.57	.16@	537	4.2	3 x 19 x 2.56■
		HD Radiator, Trans. Oil Cooler	Automatic	1.57	.16@	537	4.2	3 x 19 x 2.56■
		Air Conditioning, Trans. Oil Cooler	Automatic	1.57	.14	537	4.2	5 x 19.5 x 2.18■
			Manual	.98	.12	479	4.3	5 x 19.5 x 2.18■
		Air Conditioning	Automatic	1.57	.16@	537	4.5	5 x 19.5 x 2.18■

★ Capacity (approx.) shown with standard heater and standard coolant recovery system.

■ Temperature-controlled clutch fan

#1.57 with 3.42, 3.73 axle ratio. @.14 with 3.73 axle ratio. * .12 with 3.73 axle ratio. *2.17 with 3.42, 3.73 axle ratio.
§ All models with automatic transmissions include a transmission oil cooler integral with the radiator. ▲.16 with 3.42, 3.73 axle ratio.
† 1.57 with 3.73 axle ratio. †.16 with 3.73 axle ratio.

COOLING SYSTEMS

OPTIONAL COOLING SYSTEMS

§TUBE AND CENTER CROSS-FLOW-TYPE RADIATOR WITH
MULTILOUVER DESIGN AND 15 LB. PRESSURE CAP.

Series	Optional Combinations			Radiator			System Capacity (gal) ★	Fan (No. blades x diam x pitch)
	Engine (Liter/Cu. In.)	Option	Transmission Type	Thickness (in)	Dist. Between Tubes (Const) (in)	Frontal Area (sq in)		
ASTRO/SAFARI	2.5/151		Automatic	.93	.18	296	2.3	4 x 16 x 1.26
		HD Cooling	Manual	.93	.18	358	2.3	4 x 16 x 1.26
			Automatic	.93	.14	358	2.3	4 x 16 x 1.26
		Air Conditioning	Manual	.93	.18	358	2.3	5 x 16 x 2.05 ■
			Automatic	.93	.14	358	2.3	5 x 16 x 2.05 ■
	4.3/262		Automatic	.93	.18	407	3.4	3 x 18 x 2.51 ■
		HD Cooling	Manual	.93	.12	407	3.4	3 x 18 x 2.51 ■
			Automatic	.93	.12	407	3.4	3 x 18 x 2.51 ■
		Air Conditioning	Manual	.93	.12	407	3.4	5 x 18.9 x 2.6 ■
			Automatic	.93	.12	407	3.4	5 x 18.9 x 2.6 ■
		Trans. Oil Cooler, Engine Oil Cooler	Automatic	.93	.12	407	3.4	3 x 18 x 2.51 ■
			Automatic	.93	.12	407	3.4	3 x 18 x 2.51 ■
S-10/15	2.5/151	HD Cooling	Manual	.98	.16	351	2.8	4 x 16 x 1.57 ■
			Automatic	.98	.12	351	2.8	4 x 16 x 1.57 ■
		Air Conditioning	Manual	.98	.16	351	2.8	5 x 17.09 x 2.64 ■
			Automatic	.98	.12	351	2.8	5 x 17.09 x 2.64 ■
	2.8/173		Automatic	.98	.18	292	2.7	7 x 14.96 x 2.72 ■
		Trans. Oil Cooler, Engine Oil Cooler Trailering Special	Automatic	1.57	.16	360	3.0	7 x 14.96 x 2.72 ■
			Automatic	1.57	.16	360	3.0	7 x 14.96 x 2.72 ■
C10/1500	4.3/262		Automatic	.93	.14	358	3.4	3 x 19 x 2.56 ■
		HD Radiator	Manual	.93	.14	358	3.4	3 x 19 x 2.56 ■
			Automatic	.96	.16	358	3.4	3 x 19 x 2.56 ■
		Air Conditioning	Manual	.93	.14	358	3.4	5 x 19 x 2.18 ■
			Automatic	.93	.10	358	3.4	5 x 19 x 2.18 ■
		Trans. Oil Cooler	Automatic	1.57	.14	352	3.4	3 x 19 x 2.56 ■
		Trans. Oil Cooler, Engine Oil Cooler	Automatic	1.57	.12	352	3.4	3 x 19 x 2.56 ■
			Automatic	1.57	.12	352	3.4	3 x 19 x 2.56 ■
	5.0/305		Automatic	.98	.16	479	4.2	3 x 19 x 2.56 ■
		HD Radiator	Manual	.98	.12	479	4.2	3 x 19 x 2.56 ■
			Automatic	.98#	.12▲	537	4.2	3 x 19 x 2.56 ■
		Air Conditioning	Manual	.98	.16*	479	4.2	5 x 19.5 x 2.18 ■
			Automatic	.98	.12	537	4.2	5 x 19.5 x 2.18 ■
		Trans. Oil Cooler	Automatic	1.57	.16	537	4.2	3 x 19 x 2.56 ■

★ Capacity (approx.) shown with standard heater and standard coolant recovery system. ■ Temperature-controlled clutch fan.

‡1.57 with 3.73 axle ratio. ▲ 16 with 3.42, 3.73 axle ratio. #1.57 with 3.42, 3.73 axle ratio. *1.12 with 3.73 axle ratio.

*2.17 with 3.42, 3.73 axle ratio. @.14 with 3.73 axle ratio.

§All models with automatic transmissions include a transmission oil cooler integral with the radiator

COOLING SYSTEMS

STANDARD COOLING SYSTEMS

§TUBE AND CENTER CROSS-FLOW-TYPE RADIATOR WITH
MULTILOUVER DESIGN AND 15 LB. PRESSURE CAP.

SERIES	Engine (Liter/Cu. In.)	Radiator			System Capacity (gal) ★	Fan (No. blades x diameter x pitch)
		Thick- ness (in)	Dist. Between Tubes (Constant) (in)	Frontal Area (sq in)		
Astro/Safari	2.5/151	.93	.18	296	2.3	4 x 15.98 x 1.26
	4.3/262	.93	.18	407	3.4	3 x 18.03 x 2.51 ■
S-10/15	2.5/151	.98	.24	292	3.0	4 x 15.9 x 1.57
	2.8/173	.98	.16	292	3.1	7 x 14.96 x 2.72 ■
C10/1500	4.3/262	.93	.14	358	3.4	3 x 19 x 2.56 ■
	5.0/305	.98	.16	384	4.3	3 x 19 x 2.71 ■
	5.7/350	.98	.16	537	4.3	3 x 19 x 2.71 ■
	6.2/379	1.57	.16♦	645	6.2	5 x 20 x 2.87 ■
G10/1500	4.3/262	.93	.14	358	3.4	3 x 19 x 2.66 ■
	5.0/305	.98	.16	479	4.2	3 x 19 x 2.66 ■
	5.7/350	.98	.16	479	4.2	3 x 19 x 2.68 ■
K10/1500	4.3/262	.93	.14	358	3.4	3 x 19 x 2.56 ■
	5.0/305	.98	.16	384	4.3	3 x 19 x 2.56 ■
	5.7/350	.98	.16	537	4.3	3 x 19 x 2.56 ■
	6.2/379	1.57	.16♦	645	6.2	5 x 20 x 2.87 ■
C20/2500	4.3/262	.93	.14	358	3.4	3 x 19 x 2.56 ■
	4.8/292	.98	.16	445	3.8	3 x 19 x 2.71 ■
	5.0/305	.98	.16	384	4.3	3 x 19 x 2.71 ■
	5.7/350	.98	.16†	479	4.3	3 x 19 x 2.71 ■
	7.4/454	1.57	.16	537	5.4	5 x 19.5 x 2.18 ■
	6.2/379	1.57	▲	645	6.2	5 x 20 x 2.87 ■
G20/2500	4.3/262	.93	.14	358	3.4	3 x 19 x 2.66 ■
	5.0/305	.98	.16	479	4.2	3 x 19 x 2.66 ■
	5.7/350	.98	.12	479	4.2	3 x 19 x 2.68 ■
	6.2/379	1.57	.12	479	6.3	5 x 20 x 2.87 ■
K20/2500	4.8/292	.98	.16	445	3.8	3 x 19 x 2.71 ■
	5.7/350	.98	.16†	479	4.3	3 x 19 x 2.71 ■
	6.2/379	1.57	▲	645	6.2	5 x 20 x 2.87 ■
P20/2500	4.8/292	.98	.16	445	3.5	5 x 19 x 2.5 ■
	5.7/350	.98	.16	479	4.0	5 x 19.5 x 2.18 ■
	6.2/379	1.57	.12	645	6.2	5 x 19.7 x 2.88 ■
C30/3500	4.8/292	.98	.16	445	3.8	3 x 19 x 2.71 ■
	5.7/350	.98	.16†	479	4.3	3 x 19 x 2.71 ■
	7.4/454	1.57	.16	537	5.4	5 x 19.5 x 2.18 ■
	6.2/379	1.57	.12	645	6.2	5 x 20 x 2.87 ■
G30/3500 (05) w/o C6P	4.3/262	.93	.14	358	3.4	3 x 19 x 2.66 ■
G30/3500 (06) w/o C6P	5.7/350	.98	.12	479	4.2	5 x 19.5 x 2.18 ■
G30/3500/C6P (05) G30/3500/C6P (06)	5.7/350	.98	.12	479	4.2	5 x 19.5 x 2.18 ■
	6.2/379	.98	.12	479	6.2	5 x 20 x 2.87 ■
G30/3500 (03)	5.7/350†	1.57	.12	479	4.3	5 x 19.5 x 2.18 ■
	6.2/379†	1.57	.12	479	6.2	5 x 20 x 2.87 ■
G30/3500 (32)	5.7/350†	1.57	.12	479	4.3	5 x 19.5 x 2.18 ■
	6.2/379†	1.57	.12	479	6.2	5 x 20 x 2.87 ■
K30/3500	4.8/292	.98	.16	445	3.8	3 x 19 x 2.71 ■
	5.7/350	.98	.16	479	4.3	3 x 19 x 2.71 ■
	7.4/454	1.57	.16	537	5.4	5 x 19.5 x 2.18 ■
	6.2/379	1.57	.12	645	6.2	5 x 20 x 2.87 ■
P30/3500 (Exc. Motor Home Chassis)	4.8/292	.98	.16	445	3.5	5 x 19 x 2.5 ■
	5.7/350	.98	.16	479	4.0	5 x 19.5 x 2.18 ■
	6.2/379	1.57	.12	645	6.2	5 x 19.7 x 2.88 ■
P30/3500 Motor Home Chassis*	7.4/454‡	2.17	.10	537	5.7	7 x 19.5 Flex ■
	6.2/379‡	2.17	.10	537	7.0	5 x 19.7 x 2.88 ■

*Down-flow type radiator. ‡Automatic transmission standard. ▲.16 with LH6; .12 with LL4

★ Capacity (approx.) shown with standard heater (except P20-30 models) and standard coolant recovery system.

■ Temperature controlled clutch fan. § All models with automatic transmissions include a transmission oil cooler integral with the radiator. †.12 with 4.10, 4.56 axle ratio. ♦ .12 with 3.73 axle ratio

7.4 LITER (454 Cu. In.) V8 ENGINES

SPECIFICATIONS

	HIGH TORQUE
	7.4 Liter/454 Cu. In.
Oil Capacity	
With filter change	7
W/O filter change	6
Oil Filter	
Standard	Full-flow; replaceable element
Capacity (qts)	.85
Oil Pump	
Type	Spur gear; distributor shaft driven
Capacity (gpm)	6.0 @ 2000
Normal Pressure (psi)	40 @ 2000 rpm
Pistons	
Material	Cast aluminum alloy
Skirt	Slipper
Head	Sump
Piston Pins	
Type	Rod shrink fit to pin
Material	Chromium steel
Piston Rings	
Compression Rings	
Number	2
Type	Upper—barrel face; lower—taper face
Material	Cast alloy iron
Oil Control Rings	
Number	1
Type	Multi-piece
Material	Steel
Thermostat	Harrison; 195°
Valve Train	
Type	Individually mounted rocker arms, push rod actuated
Lifters	Hydraulic
Rocker Arm Ratio	1.70:1
Valve Guides	Pressed-in; cast alloy iron
Valve Lash	Zero
Intake Valves	
Material	Alloy steel
Head Diameter (in)	2.060-2.070
Face Coating	Aluminized
Seats	Machined in cylinder head
Rotators (intake)	Yes
Exhaust Valves	
Material	High alloy steel
Head Diameter (in)	1.715-1.725
Face Coating	Aluminized and stellite faced
Seats	Machined in cylinder head, induction hardened
Rotators (exhaust)	Yes
Water Pump	
Type	Centrifugal
Capacity (gpm)	24.5 @ 2000 rpm

7.4 LITER (454 Cu. In.) V8 ENGINES

SPECIFICATIONS

		HIGH TORQUE	
		7.4 Liter/454 4-bbl	
Basic Description		V8; valve-in-head	
Displacement (Liter/cu in)		7.4/454	
Bore & Stroke (in)		4.251 x 4.00	
Compression Ratio		7.9:1	
Firing Order		1-8-4-3-6-5-7-2	
SAE Net Horsepower @ rpm		†240 @ 3800	
SAE Net Torque (lb-ft) @ rpm		†375 @ 3200	
Air Cleaner		Thermostatically controlled; oil wetted paper element	
Camshaft			
Bearings		Steel-backed babbit	
Intake Valve (at .004" cam lift)	Opens	18° BTC	
	Closes	246° ATC	
Exhaust Valve (at .004" cam lift)	Opens	245° BTC	
	Closes	33° ATC	
Intake Duration		264°	
Exhaust Duration		278°	
Carburetor			
Type		4-Barrel	
Make		Rochester Mod-Quad	
Venturi ID (in)		1.218	
Throttle Bore (in)		1.38 Primary; 2.25 Secondary	
Choke Control		Automatic	
Connecting Rods			
Material		Drop forged steel	
Length (in)		6.130-6.140	
Bearings		Premium aluminum	
Crankcase Ventilation		Closed positive	
Crankshaft			
Material		Cast nodular iron	
Number of Counterweights		6	
Main Journal (in)		2.75 (Nominal)	
Crankpin Journal (in)		2.199-2.20	
Torsional Damper		Inertia; rubber mounted	
Bearings		Steel with Premium aluminum or copper-lead insert	
Distributor		High Energy Unit, Delco-Remy; centrifugal & vacuum advance	
Fuel Filter			
Carburetor		Pleated fiber element	
Fuel Tank		Mesh strainer	
Lubrication System		Controlled full pressure	
Main Bearings		Direct pressure	
Camshaft Bearings		Direct pressure	
Timing Gear		Centrifugally sprayed	
Connecting Rods		Direct pressure	
Valve Mechanism		Pressure & gravity	
Cylinder Walls		Cross sprayed by pressurized jets	
Piston Pins		Splash	

†The following ratings apply to California only: SAE net horsepower . . . 230 @ 3800 rpm
SAE net torque (lb-ft) . . . 360 @ 2800 rpm

7.4 LITER (454 Cu. In.) 4-bbl V8

(Ordering Code LE8)

Applications


Standard: P30/3500 Motor Home Chassis
Optional: C20/2500 Pickups, Chassis-Cabs and
Suburbans; C-K30/3500 Pickups and
Chassis-Cabs

Basic Specifications

Engine type Valve-in-head
Piston displacement (Liter/Cu. In.) 7.4/454
Bore & stroke (nominal) 4.25" x 4.00"
Compression ratio 7.9:1
Carburetor type 4-barrel
Exhaust—Dual All

Test Procedures


These curves represent full-throttle performance as obtained from a dynamometer test simulating actual operating conditions when the engine is in the vehicle, with ratings corrected to barometric pressure of 29.32" mercury and 77°F dry air.

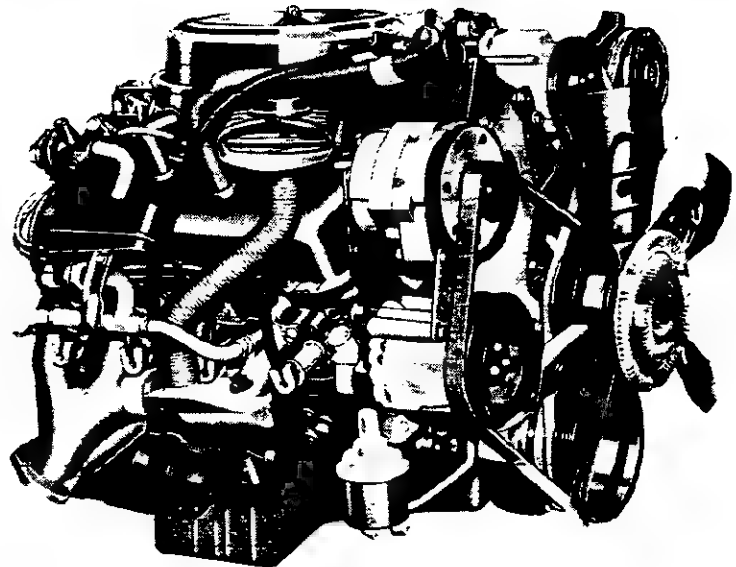

Engine Ratings

**All States
Heavy Duty Emissions
(8501 lbs GVWR and above)**

SAE net horsepower (77°F) 240 @ 3800 rpm
SAE net torque, lb-ft (77°F) 375 @ 3200 rpm

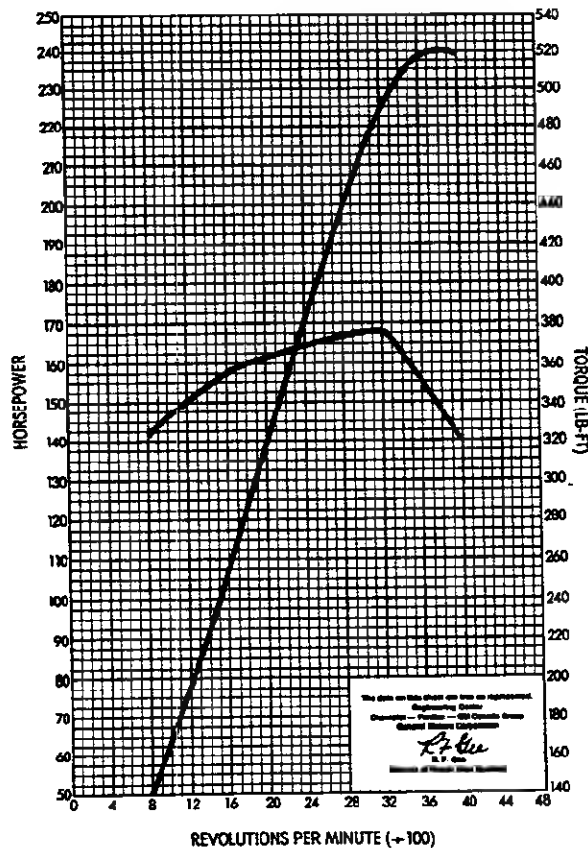

6.2 LITER (379 Cu. In.) V8 DIESEL

SPECIFICATIONS

6.2 Liter/379 V8	
Fuel Injection	
Oil Capacity	
With filter change	7
Oil Filter	
Standard	Full flow; throwaway type
Capacity (qts)	0.85
Oil Pump	
Type	Spur gear; shaft driven
Capacity (gpm)	5 @ 2000 rpm
Normal Pressure (psi)	35 psi minimum @ 1500-3000 rpm
Pistons	
Material	Cast aluminum alloy with top ring insert
Skirt	Slipper type
Head	Flat with cast swirl sump
Piston Pins	
Type	Floating pin
Material	Chromium steel
Piston Rings	
Compression Rings	
Number	2
Type	Upper - Keystone type with barrel molybdenum face; lower - tapered face
Material	Cast alloy iron
Oil Control Rings	
Number	1
Type	Multi-piece
Material	Steel
Thermostat	Robertshaw, 190°
Valve Train	
Type	Shaft mounted rocker arms, push rod actuated
Lifters	Hydraulic with roller follower
Rocker Arm Ratio	1.50:1
Valve Guides	Cast alloy iron; integral with head
Valve Lash	Zero
Intake Valve	
Material	Alloy steel
Head Diameter (in)	1.97
Face Coating	None
Seats	Machined in cylinder head; induction hardened
Exhaust Valves	
Material	Alloy steel
Head Diameter (in)	1.65
Face Coating	Stellite
Seats	Machined in cylinder head; induction hardened
Rotators	Exhaust
Water Pump	
Type	Centrifugal
Capacity (gpm)	35 @ 2000 rpm

6.2 LITER (379 Cu. In.) V8 DIESEL


SPECIFICATIONS

		6.2 Liter/379 V8
Basic Description		Fuel Injection
		V8; valve-in-head
Displacement (Liter/Cu. In.)		6.2/379
Bore & Stroke (in)		3.98 x 3.82
Compression Ratio		21.3:1
Firing Order		1-8-7-2-6-5-4-3
SAE Net Horsepower @ rpm		+130 @ 3600
SAE Net Torque (lb-ft) @ rpm		+240 @ 2000
Air Cleaner		Oil wetted paper element
Camshaft		Steel-backed Aluminum
Bearings		13° BTC
Intake Valve (at .004" cam lift)	Opens	224° ATC
	Closes	248° BTC
Exhaust Valve (at .004" cam lift)	Opens	25° ATC
	Closes	237°
Intake Duration		273°
Exhaust Duration		
Fuel System		
Lift Pump-Type		Mechanical diaphragm - camshaft drive
High Pressure Pump-Type		Stanadyne - camshaft drive
Fuel Shut off		Electric solenoid
Injector-Type		Pintle (Bosch)
Size and Spray Pattern		017-30°
Actuation		Automatic
Injection Pressure		1800 psi
Connecting Rods		
Material		Drop forged steel
Length (in)		6.2783-6.2803
Bearings		Premium aluminum
Crankcase Ventilation		Closed positive
Crankshaft		
Material		Cast nodular iron
Number of Counterweights		6
Main Journals (in)		2.95
Crankpin Journals (in)		2.40
Torsional Damper		Inertia; rubber mounted
Bearings		Premium aluminum
Fuel Filter		
Injector		Pleated fiber element (Primary and Secondary)
Fuel Tank		Mesh strainer
Lubrication System		Controlled full pressure
Main Bearings		Direct pressure
Camshaft Bearings		Direct pressure
Timing Gear		Spray
Connecting Rods		Direct pressure
Valve Mechanism		Pressure & gravity
Cylinder Walls		Spray
Piston Pins		Spray

+LD Emission ratings shown; HD Emissions are: C, K, P models: HP - 148 @ 3600
Torque - 246 @ 2000
G models: HP - 145 @ 3600
Torque - 249 @ 2000

6.2 LITER (379 Cu. In.) V8 DIESEL

(Ordering Code LL4)

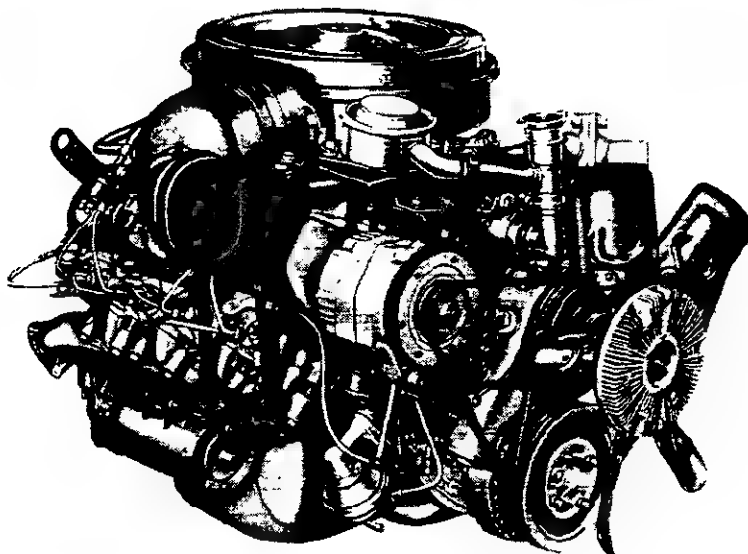

Applications

Standard: C-K20/2500 Regular Cab Pickup (w/C6P); C-K 20/2500 Bonus/Crew Cab Pickup; P20/2500; C-K-G-P30/3500 (except P31E32) Diesel Models
Optional: None

Basic Specifications

Engine type Valve-in head
Piston displacement (Liter/Cu. In.) 6.2/379
Bore & stroke (nominal) 3.98" x 3.82"
Compression ratio 21.3:1
Exhaust Dual

Test Procedures

These curves represent full-throttle performance as obtained from a dynamometer test simulating actual operating conditions when the engine is in the vehicle, with ratings corrected to barometric pressure of 29.32" mercury and 77°F dry air.

Engine Ratings

C, K, P Models



All States

SAE net horsepower (77°F) 148 @ 3600 rpm
SAE net torque, lb-ft (77°F) 246 @ 2000 rpm

G Models


All States

SAE net horsepower (77°F) 145 @ 3600 rpm
SAE net torque, lb-ft (77°F) 248 @ 2000 rpm

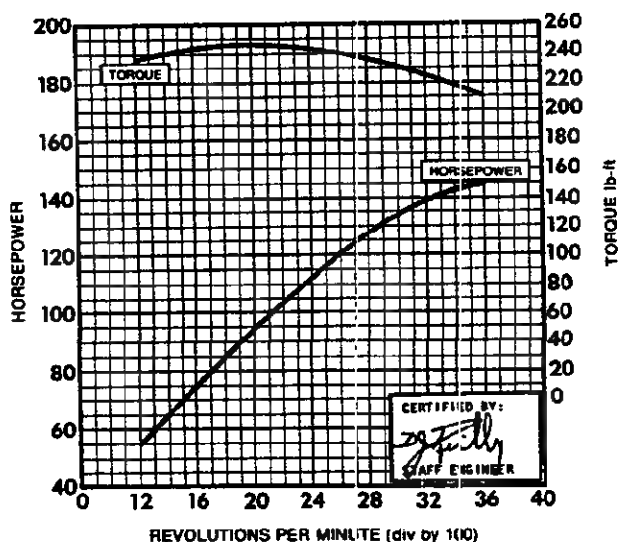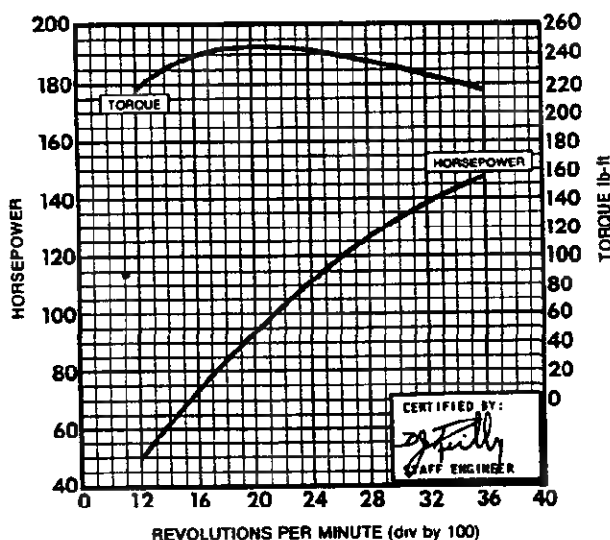

6.2 LITER (379 Cu. In.) V8 DIESEL

(Ordering Code LH6)

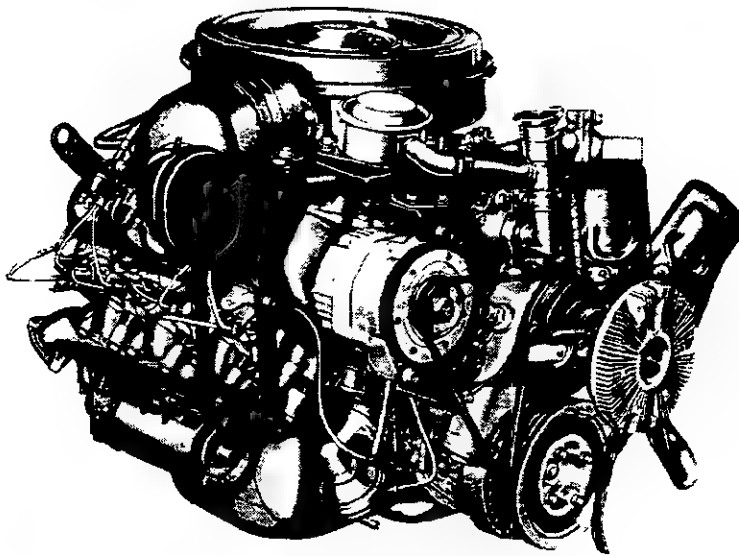

Applications

Standard: C-K10/1500, C-K20/2500 Regular Cab
Pickup (w/o C6P); G20/2500 Diesel Models
Optional: None

Basic Specifications

Engine type Valve-in-head
Piston displacement (Liter/Cu. In.) 6.2/379
Bore & stroke (nominal) 3.98" x 3.82"
Compression ratio 21.3:1
Exhaust Dual

Test Procedures


These curves represent full-throttle performance as obtained from a dynamometer test simulating actual operating conditions when the engine is in the vehicle, with ratings corrected to barometric pressure of 29.32" mercury and 77°F dry air.

Engine Ratings

All States


SAE net horsepower (77°F) 130 @ 3600 rpm

SAE net torque, lb-ft (77°F) 240 @ 2000 rpm

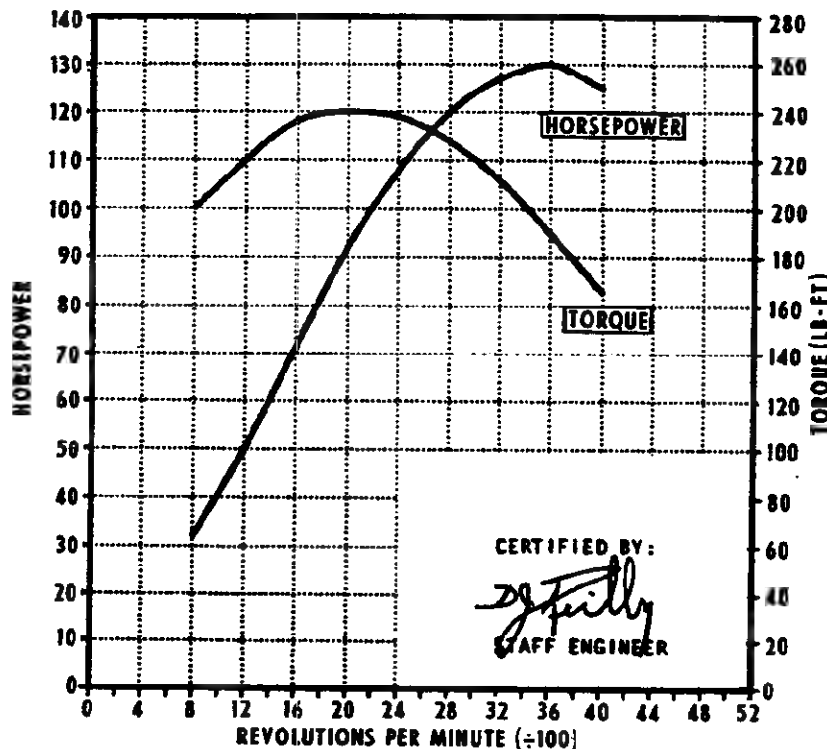

ENGINE & COOLING

6.2 DIESEL ENGINE FEATURES

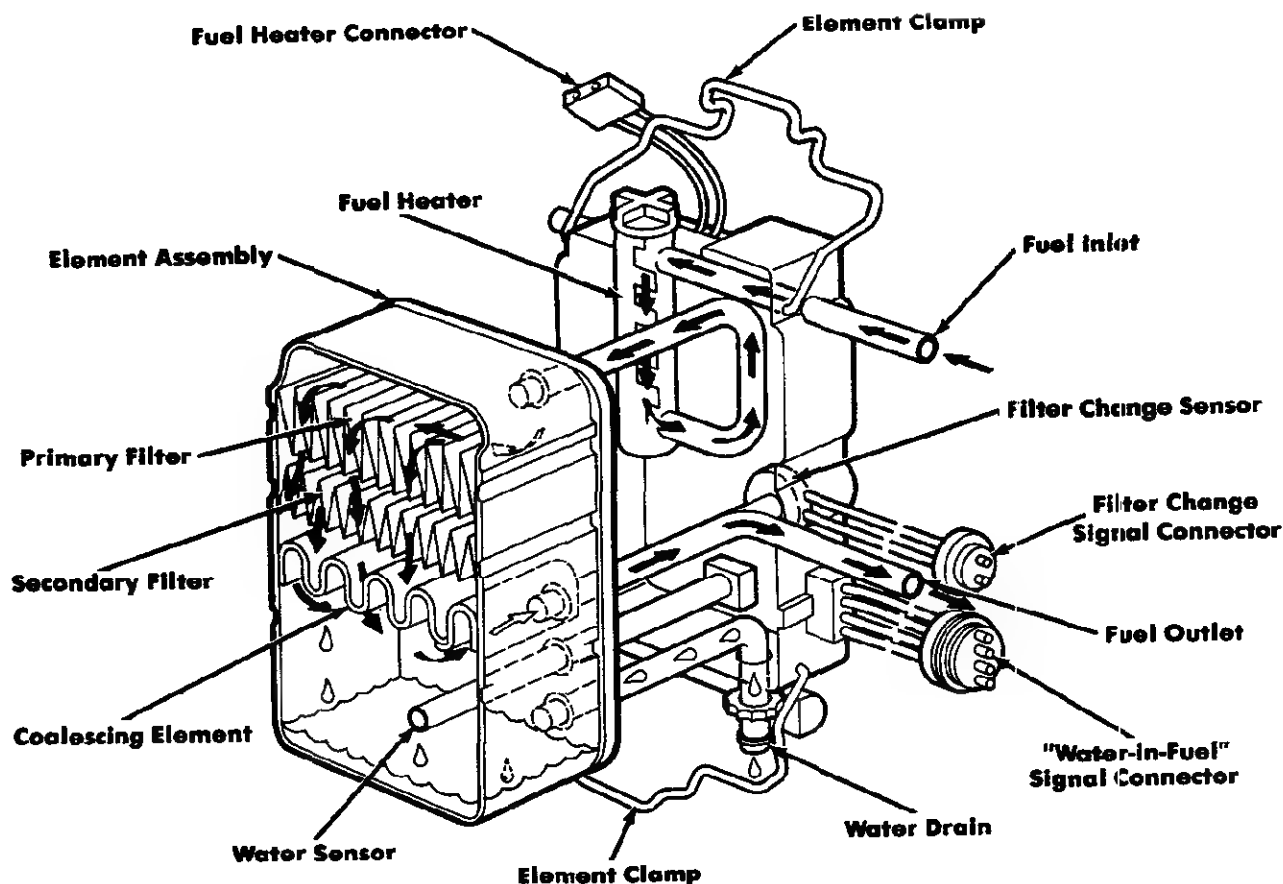

Single Unit Water/Fuel Separator, Two-Stage Fuel Filter, Fuel Heater. Mounted either to the engine or the engine compartment fire wall, depending on model, this compact modular unit consists of two main components—a permanently mounted aluminum base with integral element holding clamps and a rectangular metal element. The metal element contains two stages of fuel filter media and a third stage of coalescing material to effect water separation. The lower section of the element contains a water collection area with a capacity of approximately 260cc. The water sensor signal level is set at 50cc. to provide an early alert of water ingress.

Fuel enters at top right hand inlet (see flow schematic above) and flows into heating chamber. Heater is activated at 8°C. (46°F) and below. Heated fuel enters element at top and flows down through the two stage fuel filter media pack. While passing through the third stage, water coalesces out and drops to a sump holding area. Clean fuel returns to the base and exits to the fuel injection pump. An electrical signal is obtained from the filter change sensor located in the return path. A water drain petcock on the base allows collected water to be drained from the unit when necessary. An air

vent valve is located on top of the filter base to purge air out when a new filter assembly is installed.

Engine Oil

- Engine oil requirement is grade SF/CD or SF/CC.
- Oil change interval for normal service is every 5000 miles
- In severe service, a 2500-mile oil change interval is recommended
- Always replace oil filter element each time engine oil is changed

Starting Procedure (when engine is warm)

- Same as gasoline engine.

Starting Procedure (when engine is cold)

- Turn the ignition switch to the "on" position
- "Glow Plugs" light comes on
- Wait for glow plugs to heat the combustion chambers
- When the "Glow Plugs" light goes off, turn ignition key to start engine.

Cold Weather Starting

- When outside temperatures drop below 0°F (-18°C), use the engine block heater.

Starting Aids

- In cold weather, do not under any circumstance use ether or other chemical starting assists.

ENGINE & COOLING

6.2 DIESEL ENGINE FEATURES

Here's why diesel engines work so efficiently.

There are three major reasons why diesel engines are generally more economical than comparably sized gasoline engines: air/fuel ratio, compression ratio, and price of fuel.

Diesels have significantly higher air/fuel ratios than comparable gasoline engines—which means that diesels burn proportionately less fuel.

A diesel's air/fuel ratio is about 80-to-1 at idle and 20-to-1 at full load. Compare this to gas engines, which use about a 14-to-1 mixture of air and fuel at idle, and a 12-to-1 mixture at full load.

Diesel engines depend on compression for ignition of fuel, whereas the gas engine depends on spark plugs. The diesel, with its higher compression ratio, more efficiently converts fuel-heat energy into mechanical energy. That energy provides the diesel with its traditionally high torque power for hauling.

Thanks to functional differences like these, you can get more miles per gallon with a diesel engine than with a comparably sized gasoline engine. What's more, you do it with traditionally lower-priced fuel. Another diesel plus: no conventional gas engine tune-ups—or spark plugs, distributor or ignition wiring to maintain.

The 6.2 Liter Diesel. Built in one of the world's newest engine plants. GM's Moraine engine assembly plant in Ohio is an impressive sight. It is a totally redesigned plant with the latest modern technology working to produce a rugged, high-efficiency power-plant.

Quality is the byword here. You can see it in the extensive quality checks, and in the intensive testing procedures regularly performed during and after assembly. For instance, all parts are air-pressure leak tested to check for quality fits; TV monitors are used to check whether all valve lifters are in place. And each new diesel is thoroughly computer-checked after assembly. Some engines are randomly tested in a laboratory: they're run at various throttle positions for

numerous checks and testing.


A sophisticated computer network. This diesel plant uses more programmable controllers than any other manufacturing plant in the U.S.—400. These terminals help run the machines and make automatic tool compensations. Another important feature is the central "host" computer which efficiently oversees and monitors the subordinate controllers.

The emphasis is on quality. An engine is only as good as the people who build it. That's why all employees are required to take 80 rigorous hours of classroom training—hands-on experience with the engine—to give them the total picture. But it doesn't stop there. Each employee is responsible for the quality of his work. The object at all times is to build it right the first time.

Special 6.2 Liter Diesel Highlights. □ This diesel engine is designed specifically for truck use. □ The 6.2 Liter Diesel uses nodular iron on its bearing caps—a significantly stronger design than those without nodular iron. □ The camshaft is made of forged steel and is carburized to give it strength. □ The fuel pump is a Roosa Master®—a brand used worldwide on many diesels, including tractors. □ A highly proven Ricardo Comet precombustion chamber with its swirl-type design provides efficient fuel burn and impressive emissions control characteristics. □ The 6.2 Liter Diesel is equipped with a standard oil cooler. □ A block heater and glow plugs are standard to aid cold-weather starts. At 0°F, the glow plugs can preheat the prechambers in about 6 seconds. □ There is extensive moisture-in-fuel protection, including (1) an integral two-stage fuel filter, a fuel/water separator with instrument panel warning light (2) an electric fuel heater, and (3) a fuel filter change signal. □ The higher compression ratios of diesels demand quality dimensions in design and production. The 6.2 Liter Diesel is a very close-tolerance engine. Most of the critical dimensions are controlled to within two-thousandths of an inch. That's about half the thickness of this piece of paper!

ENGINE & COOLING


6.2 DIESEL ENGINE FEATURES

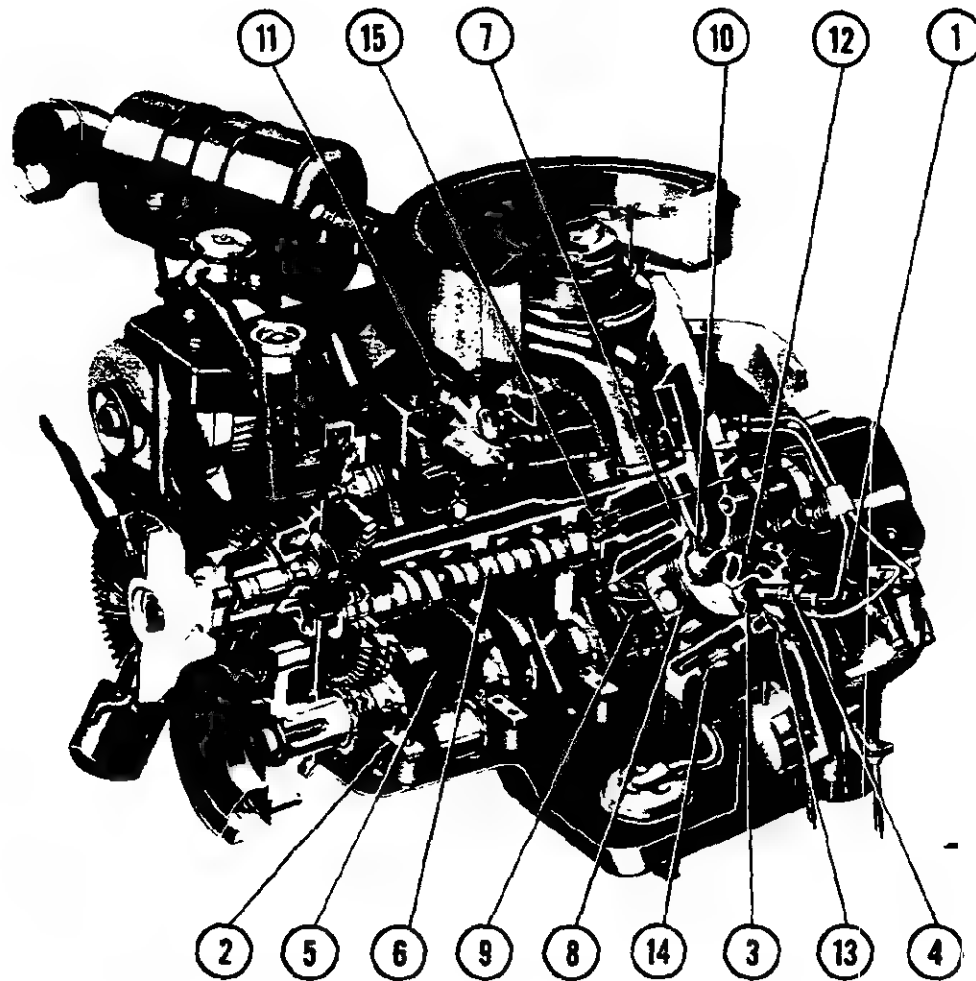

1. Seventeen-bolt head design for a tight gasket seal all around. Locates five bolts around each cylinder bore.
2. Four-bolt main bearing caps provide rigid support for the crankshaft.
3. Ricardo Comet V precombustion chambers for high efficiency and low noise levels.
4. Pintle-type fuel injector nozzles with fuel lines made of high-pressure steel tubing.
5. Nodular iron crankshaft with external torsional damper.
6. Forged steel carburized camshaft for strength and durability.
7. Cast alloyed gray iron cylinder block for overall strength. Cylinder walls are reborable.
8. Cast aluminum pistons combine strength and light weight.
9. Forged heat-treated steel connecting rods for strength and rigidity.
10. Silchrome® steel intake valves with full-chrome stems for durability.
11. Stanadyne® mechanical distributor fuel system includes a full mechanical governor with friction damper ring. Corrosion-resistant springs and check springs.
12. Stellite-faced exhaust valves with full-chrome stems and positive valve rotators.
13. Glow plug starting system preheats the pre-combustion chambers for fast cold-engine starts.
14. Engine block heater for fast starts in cold weather.
15. Roller hydraulic lifters help provide precise operation of valve train components.

ENGINE & COOLING

6.2 DIESEL ENGINE FEATURES

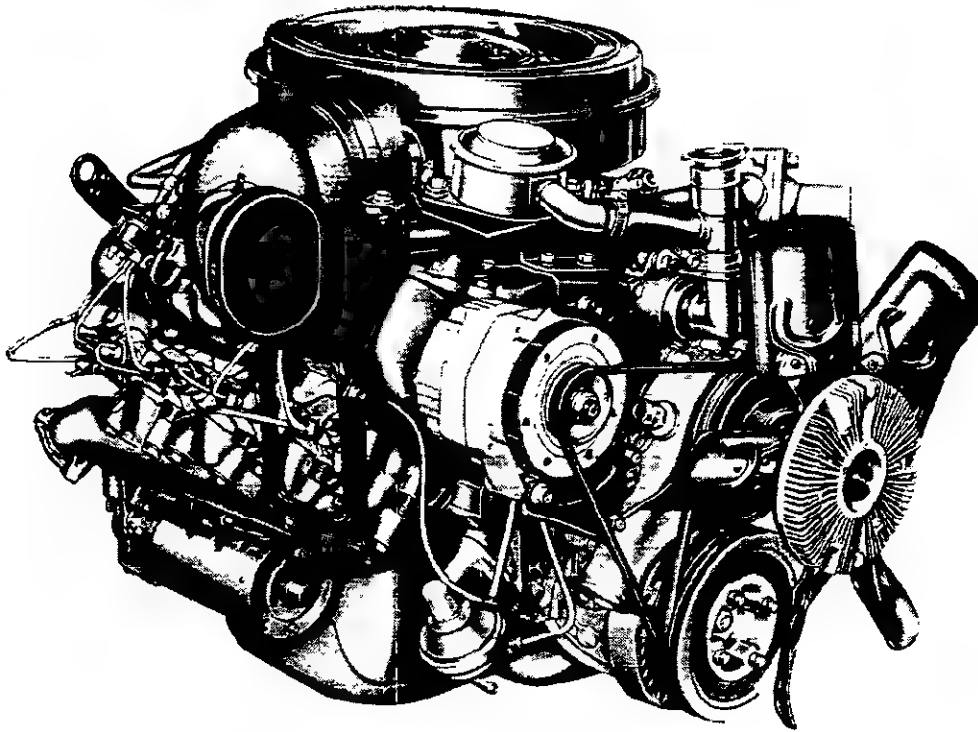

A 90° 4-cycle V8 diesel engine standard on full-size Pickups, Suburbans, Chassis-Cab, Blazer/Jimmy, Chevy Van/Vandura, Sportvan/Rally, Cutaway Van, Hi-Cube Van, FC/Step-Van/Value Van and Motor Home Chassis Diesel models. It's no secret that more and more truck owners are going diesel—a practical alternative to gas engines. That's why we're offering the 6.2 Liter Diesel for full-size Pickups, Suburbans, Chassis-Cab, Blazer/Jimmy, Chevy Van/Vandura, Sportvan/Rally, Cutaway Van, Hi-Cube Van, FC/Step-Van/Value Van diesel models. This totally new powerplant is a satisfying combination of power and common sense—6.2 liters of tough-towing, big-hauling, hardworking, fuel-sipping power.

The right power and the right mileage—right now! This made-in-America V8 engine, designed and manufactured specifically for trucks, has the traditional fuel-economy advantages of diesel over gasoline. And extensive testing also indicates that the 6.2 Liter Diesel can handle heavy loads and stop-and-go traffic. It also offers some of the best mileage estimates ever in full-size GM light-duty trucks. Simply put, this new V8 presents a powerful case why you should go diesel.

Trailer towing muscle. Torque, or low-end power, is an important feature on any truck. But the 6.2 Liter

Diesel really delivers here. It's rated at 240 lb.-ft. at 2000 RPM—that means it'll dig in and pull hard fully loaded. It also means it'll tow a heap of trailer. When properly equipped, a full-size Diesel Pickup or Suburban can move as much as 13,500 lbs., which includes itself, trailer, passengers, cargo and equipment.

Rugged diesel construction throughout. The 6.2 Liter Diesel is built to take a lot. It features thick cylinder walls, a forged steel camshaft, a nodular iron crankshaft (nodular iron is gray cast-iron with a magnesium alloy), five head bolts around each cylinder, and four-bolt main bearing caps which help provide rigid support for the crankshaft and reduce stresses.

Why you should go diesel. It's simple. If you plan to put a lot of miles on your truck and/or high idle operations and if you're at all concerned about fuel prices, you should consider going diesel. In addition, diesel offers you high torque power for hauling. And diesels have a well-earned reputation in applications ranging from locomotives to ocean tankers. And here's the clincher: low maintenance costs. There are no spark plugs, distributor or ignition wiring. So you don't have these to maintain. Just about any way you look at it, diesels can be a big plus for most truck applications.

5.7 LITER (350 Cu. In.) V8 ENGINES

SPECIFICATIONS

	Series 16/1500-30/3500 (LS9 and LT9)
	5.7 Liter/350 4-bbl
Oil Filter	Throwaway
Capacity (qts)	.85
Oil Pump	
Type	Spur gear; distributor shaft driven
Capacity (gpm)	4.3 @ 2000 rpm
Normal Pressure (psi)	45 @ 2000 rpm
Pistons	
Material	Cast aluminum alloy
Skirt	Closed
Head	Sump*
Piston Pins	
Type	Rod shrink fit to pin
Material	Chromium steel
Piston Rings	
Compression Rings	
Number	2
Type	Upper—barrel; lower—inside bevel
Material	Cast iron alloy
Oil Control Ring	
Number	1
Type	Multi-piece
Material	Steel
Thermostat	Harrison; 195°
Valve Train	
Type	Individually mounted rocker arms, push rod actuated
Lifters	Hydraulic
Rocker Arm Ratio	1.50:1
Valve Guides	Integral with cylinder head
Valve Lash	Zero
Intake Valves	
Material	Alloy steel
Diameter (in.)	1.94 LS9; 1.72 LT9
Face Coatings	None on LS9; aluminized on LT9
Seats	Machined in cylinder head
Exhaust Valves	
Material	High alloy steel
Diameter (in.)	1.50
Face Coating	Aluminized
Seats	Machined in cyl. head; induction hardened
Rotators (exhaust)	Yes
Water Pump	
Type	Centrifugal
Capacity (gpm)	21.6 @ 2000 rpm

*Chamfered top land on light duty emissions

5.7 LITER (350 Cu. In.) V8 ENGINES

SPECIFICATIONS


		Series 10/1500-30/3500 (L29)	Series 10/1500-30/3500 (L79)
		5.7 Liter/350 4-bbl	5.7 Liter/350 4-bbl
Basic Description		V8; valve-in-head	
Displacement (Liter/cu in)		5.7/350	5.7/350
Bore & Stroke		4.00 x 3.48	4.00 x 3.48
Compression Ratio		8.2:1	8.3:1
Firing Order		1-8-4-3-6-5-7-2	
SAE Net Horsepower @ rpm		165 @ 3800	†185 @ 4000
SAE Net Torque (lb-ft) @ rpm		275 @ 1600	†285 @ 2400
Air Cleaner		Thermostatically controlled; oil wetted paper element	
Camshaft			
Bearings		Steel-backed babbitt	
Intake Valve (at .004" cam lift)	Opens	14° BTC	
	Closes	244° ATC	
Exhaust Valve (at .004" cam lift)	Opens	243° BTC	
	Closes	26° ATC	
Intake Duration		258°	
Exhaust Duration		269°	
Carburetor			
Type		4-barrel	
Make		Rochester	
Venturi ID (in)		1.218	
Throttle Bore (in)		Pr.-1.38; Sec.-2.25	
Choke Control		Automatic (Electric)	
Connecting Rods			
Material		Drop-forged Steel	
Length (in)		5.695-5.705	
Bearings		Premium aluminum	
Crankcase Ventilation		Closed positive	
Crankshaft			
Material		Cast nodular iron	
Number of Counterweights		6	
Main Journal dia (in)		2.45	
Crankpin Journal dia (in)		2.10	
Torsional Damper		Inertia; rubber mounted	
Bearings		Upper - Micro-babbitt or copper lead; Lower - premium aluminum	
Distributor		High Energy Unit, Delco-Remy; centrifugal & vacuum advance	
Fuel Filter			
Carburetor		Pleated fiber element	
Fuel Tank		Plastic strainer	
Lubrication System		Controlled full pressure	
Main Bearings		Direct pressure	
Camshaft Bearings		Direct pressure	
Timing Gear		Centrifugally sprayed	
Connecting Rods		Direct pressure	
Valve Mechanism		Pressure & gravity	
Cylinder Walls		Cross sprayed throw-off from rod bearing	
Piston Pins		Cross sprayed throw-off from rod bearing	
Oil Capacity (qt)			
With filter change		5	
W/o filter change		4	

†The following ratings apply to California only: SAE net horsepower . . . 155 @ 4000 rpm
SAE net torque (lb-ft) . . . 240 @ 2800 rpm

5.7 LITER (350 Cu. In.) 4-bbl V8

(Ordering Code LT9)

4 bbl mark

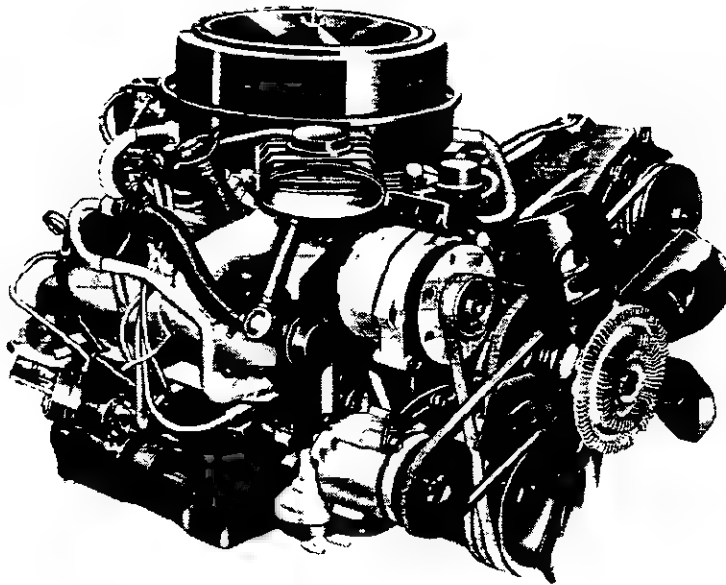

Typical Engine Shown

Applications

Standard: C20/2500 Suburban; K20/2500 Suburban; G30/3500 Vans (except G30/3500-05/06 w/o C6P)

Optional: C20/2500 Pickup and Chassis-Cab (03, 43); K20/2500 Pickup*; C-K30/3500 Pickup and Chassis-Cab (03, 43); G30/3500-05/06 w/C6P; P20/2500-30/3500 models (except Motor Home Chassis)

*With C6P Heavy Duty Chassis

Basic Specifications

Engine type Valve-in-head
Piston displacement (Liter/Cu. In.) 5.7/350
Bore & stroke (nominal) 4.00" x 3.48"
Compression ratio 8.3:1
Carburetor type 4-barrel
Exhaust—Single California
—Dual All States except California


Test Procedures

These curves represent full-throttle performance as obtained from a dynamometer test simulating actual operating conditions when the engine is in the vehicle, with ratings corrected to barometric pressure of 29.32" mercury and 77°F dry air.

Engine Ratings


All States except California Heavy Duty Emissions (8501 lbs GVWR and above)

SAE net horsepower (77°F) 185 @ 4000 rpm
SAE net torque, lb-ft (77°F) 285 @ 2400 rpm

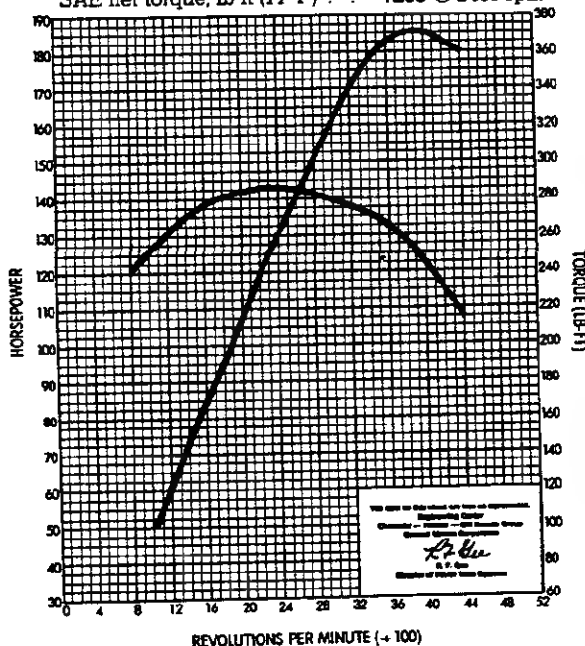


California Only Heavy Duty Emissions (8501 lbs GVWR and above)

SAE net horsepower (77°F) 155 @ 4000 rpm
SAE net torque, lb-ft (77°F) 240 @ 2800 rpm

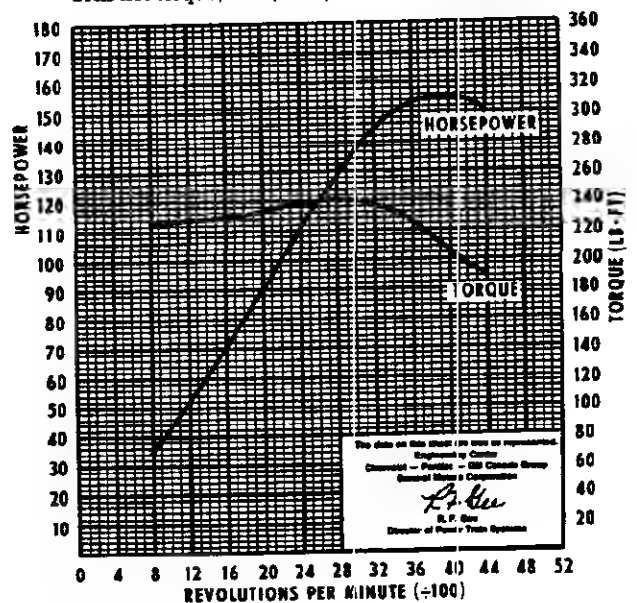

5.7 LITER (350 Cu. In.) 4-bbl V8

(Ordering Code LS9)

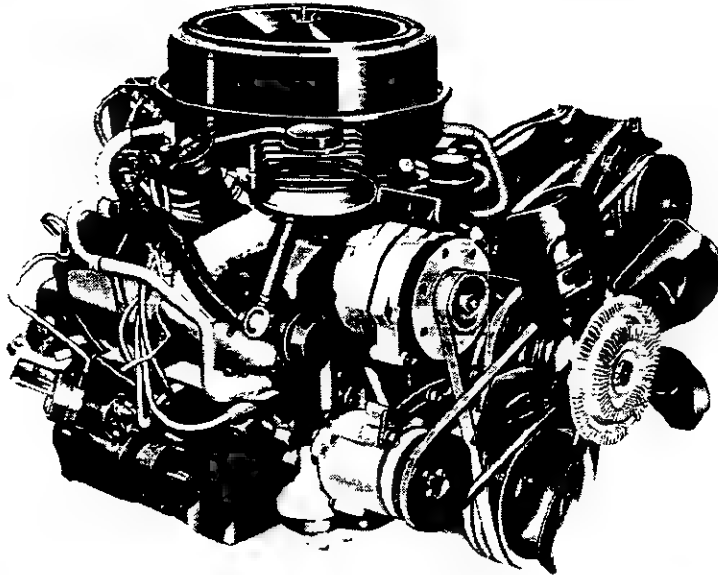

Typical Engine Shown

Applications

Standard: K10/1500 Suburban, K20/2500* Pickup;
G30/3500 Sportvan/Rally
Optional: C10/1500 Suburban; G10/1500-20/2500
Sportvan/Rally; C20/2500(03)* Pickup
(California only).

*Without C6P Heavy-Duty Chassis

Basic Specifications

Engine type Valve-in-head
Piston displacement (Liter/Cu. In.) 5.7/350
Bore & stroke (nominal) 4.00" x 3.48"
Compression ratio 8.2:1
Carburetor type 4-barrel
Exhaust—Single with dual tail pipe All

Test Procedures


These curves represent full-throttle performance as obtained from a dynamometer test simulating actual operating conditions when the engine is in the vehicle, with ratings corrected to barometric pressure of 29.32" mercury and 77°F dry air.

Engine Ratings

All States

Light Duty Emissions
(8500-lb GVWR and below)

SAE net horsepower (77°F) 165 @ 3800 rpm
SAE net torque, lb-ft (77°F) 275 @ 1600 rpm

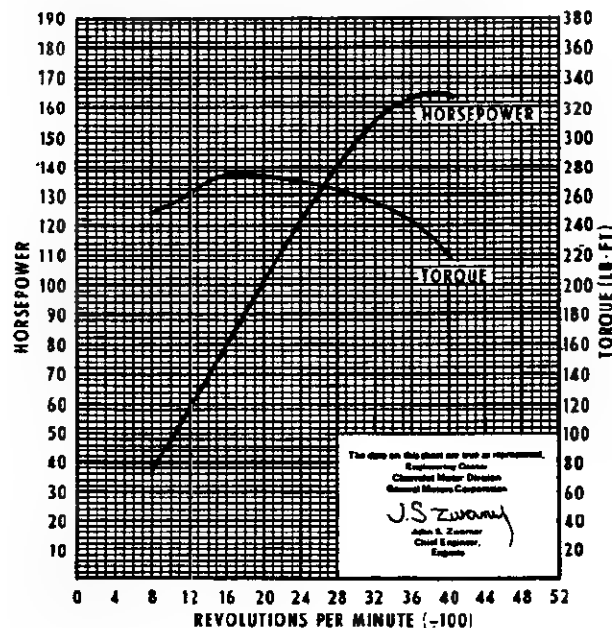

5.0 LITER (305 Cu. In.) V8 ENGINES

SPECIFICATIONS

	El Camino/Caballero	Series 10/1500-20/2500 (LE9)	Series 10/1500-20/2500 (LF3)
	5.0 Liter/305 4-bbl	★5.0 Liter/305 4-bbl	▲5.0 Liter/305 4-bbl
Oil Filter		Throwaway	
Capacity (qts)	.625	.85	
Oil Pump		Spur gear; distributor shaft driven	
Type		4.3 @ 2000 rpm	
Capacity (gpm)		45 @ 2000 rpm	
Normal Pressure (psi)	50-65 @ 2000 rpm		
Pistons		Cast aluminum alloy	
Material		Closed	
Skirt		Sump	
Head			
Piston Pins		Rod shrink fit to pin	
Type		Chromium steel	
Material			
Piston Rings		2	
Compression Rings		Upper - barrel; lower - inside bevel	
Number		Cast iron alloy	
Type		1	
Material		Multi-piece	
Oil Control Ring		Steel	
Number		Harrison; 195°	
Type			
Material			
Thermostat			
Valve Train		Individually mounted rocker arms, push rod actuated	
Type		Hydraulic	
Lifters		1.50:1	
Rocker Arm Ratio		Integral with cylinder head	
Valve Guides		Zero	
Valve Lash			
Intake Valves		Alloy steel	
Material		1.84	
Diameter (in.)		None	
Face Coatings		Machined in cylinder head	
Seats			
Exhaust Valves		High alloy steel	
Material		1.50	
Diameter (in.)		Aluminized	
Face Coating		Machined in cyl. head; induction hardened	
Seats		Yes	
Rotators (exhaust)			
Water Pump		Centrifugal	
Type		21.6 @ 2000 rpm	
Capacity (gpm)			

★ Not available in California

▲ Available in California only

5.0 LITER (305 Cu. In.) V8 ENGINES

SPECIFICATIONS

	El Camine/Caballero		Series 10/1500-20/2500(LE3)	Series 10/1500-20/2500(LF3)
	5.0 Liter/305 4-bbl		★5.0 Liter/305 4-bbl	▲5.0 Liter/305 4-bbl
Basic Description			V8; valve-in-head	
Displacement (Liter/cu in)	5.0/305		5.0/305	
Bore & Stroke	3.74 x 3.48		3.74 x 3.48	
Compression Ratio	9.5:1		9.2:1	
Firing Order	1-8-4-3-6-5-7-2		1-8-4-3-6-5-7-2	
SAE Net Horsepower @ rpm	150 @ 4000		160 @ 4400	
SAE Net Torque (lb-ft) @ rpm	240 @ 2400		235 @ 2000	
Air Cleaner			Thermostatically controlled; Oil wetted paper element	
Camshaft			Steel-backed babbitt	
Bearings				
Intake Valve	Opens	44° BTC	16° BTC	
	Closes	76° ABC	228° ATC	
Exhaust Valve	Opens	78° BBC	234° BTC	
	Closes	52° ATC	25° ATC	
Intake Duration	300°		244°	
Exhaust Duration	310°		259°	
Carburetor			4-barrel	
Type			Rochester	
Make				
Venturi ID (in.)	1.093		1.218	
Throttle Bore (in.)	Pri.-1.38, Sec.-2.25		Pri.-1.38; Sec.-2.25	
Choke Control			Automatic (Electric)	
Connecting Rods			Drop-forged Steel	
Material			5.695-5.705	
Length (in)			Premium aluminum	
Bearings			Closed positive	
Crankcase Ventilation				
Crankshaft			Cast nodular iron	
Material			6	
Number of Counterweights			2.45	
Main Journal dia (in)			2.10	
Crankpin Journal dia (in)			Inertia, rubber mounted	
Torsional Damper			Upper - Micro-babbitt or copper lead; Lower - premium aluminum	
Bearings			High Energy Unit, Delco-Remy; centrifugal & vacuum advance	
Distributor				
Fuel Filter			Pleated fiber element	
Carburetor			Plastic strainer	
Fuel Tank			Controlled full pressure	
Lubrication System			Direct pressure	
Main Bearings			Direct pressure	
Camshaft Bearings			Centrifugally sprayed	
Timing Gear			Direct pressure	
Connecting Rods			Pressure & gravity	
Valve Mechanism			Cross sprayed throw-off from rod bearing	
Cylinder Walls			Cross sprayed throw-off from rod bearing	
Piston Pins				
Oil Capacity (qts)				
With filter change	5.0		5.0	
W/o filter change			4.0	

★ Not available in California

▲ Available in California only

5.0 LITER (305 Cu. In.) 4-bbl V8*

(Ordering Code LF3)

Applications

Standard: None

Optional: C10/1500 Pickup; G10/1500-20/2500 Chevy
Van/Vandura


*Available in California only

Basic Specifications

Engine type Valve-in-head
Piston displacement (Liter/Cu. In.) 5.0/305
Bore & stroke (nominal) 3.74" x 3.48"
Compression ratio 8.6:1
Carburetor type 4-barrel
Exhaust—Single (Dual tail pipe) All

Test Procedures

These curves represent full-throttle performance as obtained from a dynamometer test simulating actual operating conditions when the engine is in the vehicle, with ratings corrected to barometric pressure of 29.32" mercury and 77°F dry air.

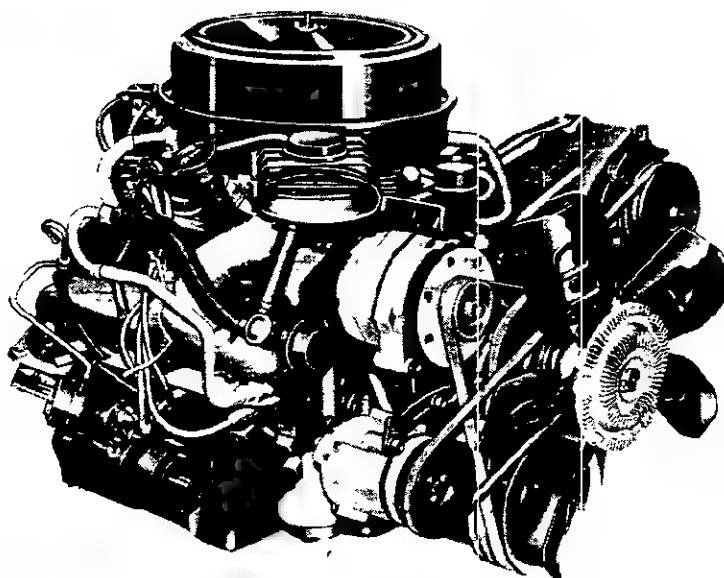


Typical Engine Shown

Engine Ratings

Light Duty Emissions
(8500 lbs GVWR and under)

SAE net horsepower (77°F) 155 @ 4000 rpm
SAE net torque, lb-ft (77°F) 245 @ 1600 rpm

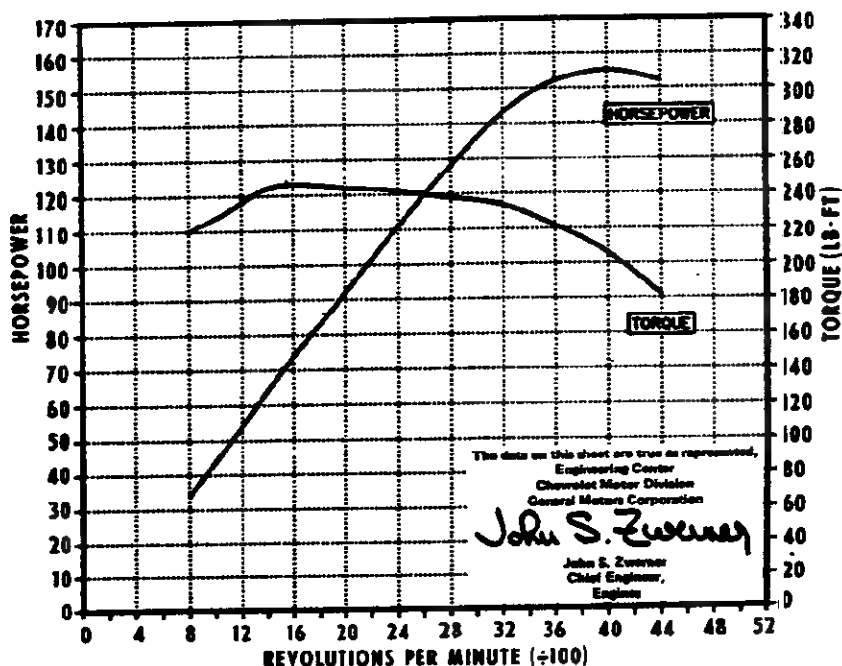

5.0 LITER (305 Cu. In.) V8 WITH ESC*

(Ordering Code LE9)

Applications

Standard: C10/1500 Suburban; K10/1500 Blazer/
Jimmy
Optional: C-K10/1500 Pickup; G10/1500-20/2500
Chevy Van/Vandura and Sportvan/Rally;
C20/2500(03) Pickup.


*Not Available in California

Basic Specifications

Engine type Valve-in-head
Piston displacement (Liter/Cu. In.) 5.0/305
Bore & stroke (nominal) 3.74" x 3.48"
Compression ratio 9.2:1
Carburetor type 4-barrel
Exhaust—Single (Dual tail pipe) All

Test Procedures

These curves represent full-throttle performance as obtained from a dynamometer test simulating actual operating conditions when the engine is in the vehicle, with ratings corrected to barometric pressure of 29.32" mercury and 77°F dry air.

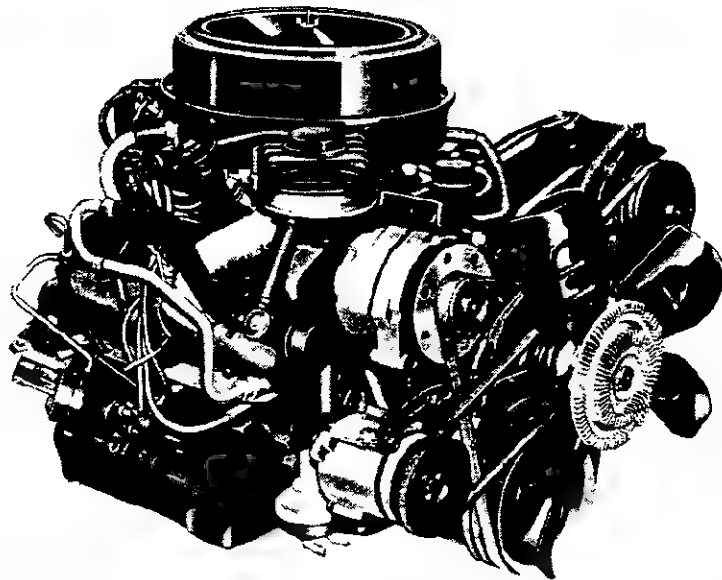

Typical Engine Shown


Engine Ratings

All Models

Light Duty Emissions (ADR)
(8500 lbs GVWR and under)


SAE net horsepower (77°F) 160 @ 4400 rpm

SAE net torque, lb-ft (77°F) 235 @ 2000 rpm

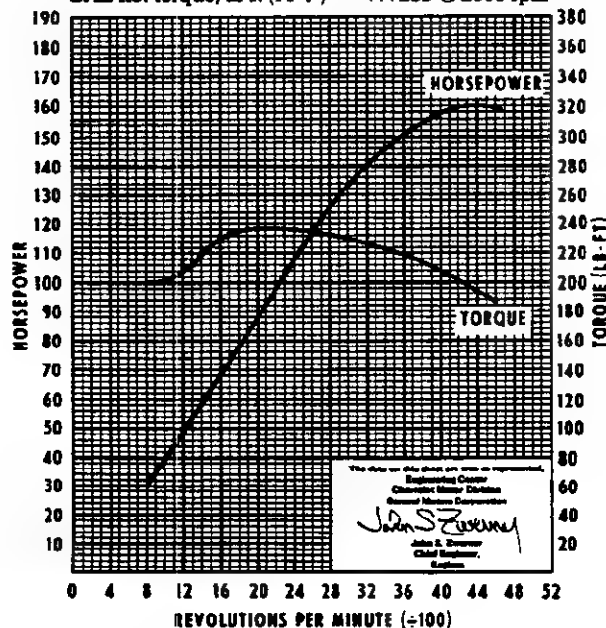

5.0 LITER (305 Cu. In.) V8

(Ordering Code LG4)

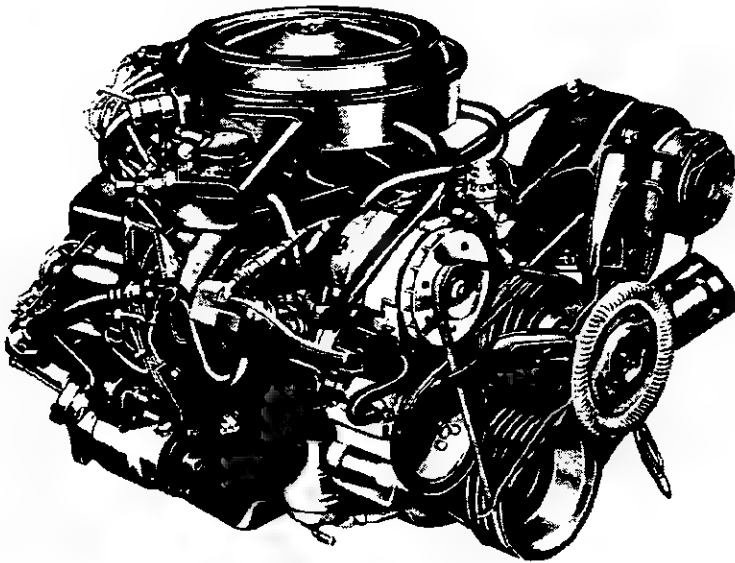

Typical Engine Shown

Applications

Standard: None
Optional: El Camino/Caballero

Basic Specifications

Engine type	Valve-in-head
Piston displacement (Liter/Cu. In.)	5.0/305
Bore & stroke (nominal)	3.74" x 3.48"
Compression ratio	9.5:1
Carburetor type	4-barrel
Exhaust—Single	All

Test Procedures

These curves represent full-throttle performance as obtained from a dynamometer test simulating actual operating conditions when the engine is in the vehicle, with ratings corrected to barometric pressure of 29.32" mercury and 77°F dry a.r.

Engine Ratings

All Models

SAE net horsepower (77°F)	150 @ 4000 rpm
SAE net torque, lb-ft (77°F)	240 @ 2000 rpm

NOTES

4.3 LITER 4-bbl/EFI & 4.8 LITER 1-bbl SIX ENGINES

SPECIFICATIONS

	High Torque	
	4.3 Liter/262 4-bbl 4.3 Liter/262 EFI	4.8 Liter/292 1-bbl
Oil Capacity (qts)		
With filter change	5	6
W/o filter change	4	5
Oil Filter	Full flow, throwaway type	
Capacity	.43 quart	
Oil Pump		
Type	Spur gear, distributor shaft driven	
Capacity (gpm)	4.5 to 6 @ 2000 rpm	
Normal Pressure (psi)	40 to 60 @ 2000 rpm	
Pistons		
Material	Cast aluminum alloy	
Skirt	Closed	Closed-full
Head	Sump with chamfer top edge	Sump
Piston Pins		
Type	Rod shrink fit to pin	
Material	Chromium-steel	
Piston Rings		
Compression Rings		
Number		
Type	Upper: Barrel face; Lower: Inside bevel	
Material	Cast alloy iron	
Oil Control Rings		
Number	1	
Type	Multi-piece	
Material	Steel	
Thermostat	Harrison or Dole; 195°	
Valve Train		
Type	Individually mounted rocker arms, push rod actuated	
Lifters	Hydraulic	
Rocker Arm Ratio	1.50:1	1.75:1
Valve Guides	Integral with cylinder head	
Valve Lash	Zero	
Intake Valves		
Material	Alloy steel	
Head Diameter (in)	1.94	1.72
Face Coating	None	Aluminized
Seats	Machined in cylinder head	
Exhaust Valves		
Material	High alloy steel	
Head Diameter (in)	1.50	
Face Coating	Aluminized	Stellite Face
Seats	Machined in cylinder head; induction hardened	
Rotators	Yes (exhaust valves only)	
Water Pump		
Type	Centrifugal	
Capacity (gpm)	24.4 @ 2000 rpm	

4.3 LITER 4-bbl/EFI & 4.8 LITER 1-bbl SIX ENGINES

SPECIFICATIONS


		High Torque		
		4.3 Liter/262 EFI	4.3 Liter/262 4-bbl	4.8 Liter/292 1-bbl
Basic Description		V6		Six-cylinder in-line; valve-in-head
Displacement (Liter/Cu. In.)		4.3/262		4.8/292
Bore & Stroke (in)		4.0 x 3.48		3.88 x 4.12
Compression Ratio		9.3:1		7.8:1
Firing Order		1-2-3-4-5-6		1-5-3-6-2-4
SAE Net Horsepower @ rpm		145 @ 4000	*155 @ 4000	#115 @ 4000
SAE Net Torque (lb-ft) @ rpm		230 @ 2400	*230 @ 2400	#210 @ 800
Air Cleaner		Thermostatically controlled; oil wetted paper element		
Bearings		Steel-backed babbitt or copper lead alloy		Aluminum
Camshaft		Cast alloy iron		
Inlet Valve (at .004" cam lift)	Opens	22° BTC		23° BTC
	Closes	238° ATC		247° ATC
Exhaust Valve (at .004" cam lift)	Opens	248° BTC		246° BTC
	Closes	32° ATC		24° ATC
Inlet Duration		260°		270°
Exhaust Duration		280°		270°
Fuel Delivery		EFI	Carburetor	Carburetor
Type		Throttle bore injection	4-Barrel staged downdraft	1-Barrel downdraft
Make		Rochester		
Venturi ID		—	1.218	1.50 in.
Throttle Bore		1.38	Primary 1.38; Secondary 2.25	1.75 in.
Choke Control		None	Automatic	
Connecting Rods				
Material		Forged steel		
Length (in)		5.70		6.76
Bearings		Premium aluminum or copper lead alloy		Premium aluminum
Crankcase Ventilation		Closed positive		
Crankshaft				
Material		Nodular iron		
Number of Counterweights		12		
Main Journal dia (in)		2.45	Nos. 1-7—2.2983-2.2993	
Crankpin Journal dia (in)		2.249—2.250	2.099—2.100	
Torsional Damper		Inertia, hysteresis		
Bearings		Premium aluminum		
Distributor		High Energy Unit, Delco-Remy; centrifugal & vacuum advance		
Fuel Filters				
Carburetor		In-line throwaway	Replaceable, pleated fiber element	
Fuel Tank		Plastic mesh screen		
Lubrication System		Full pressure		
Main Bearings		Direct pressure		
Camshaft Bearings		Direct pressure		
Timing Gear		Sprayed by nozzle		
Connecting Rods		Direct pressure		
Valve Mechanism		Pressure & gravity		
Cylinder Walls		Cross sprayed by pressurized jets		
Piston Pins		Cross sprayed by pressurized jets		

*For Chevy Van/Vandura and Sportvan/Rally: HP—145 @ 4000; Torque—225 @ 2400.

#The following ratings apply to California only: SAE net horsepower115 @ 3600 rpm
SAE net torque (lb-ft).215 @ 1600 rpm

4.8 LITER (292 Cu. In.) 1-bbl SIX

(Ordering Code L25)

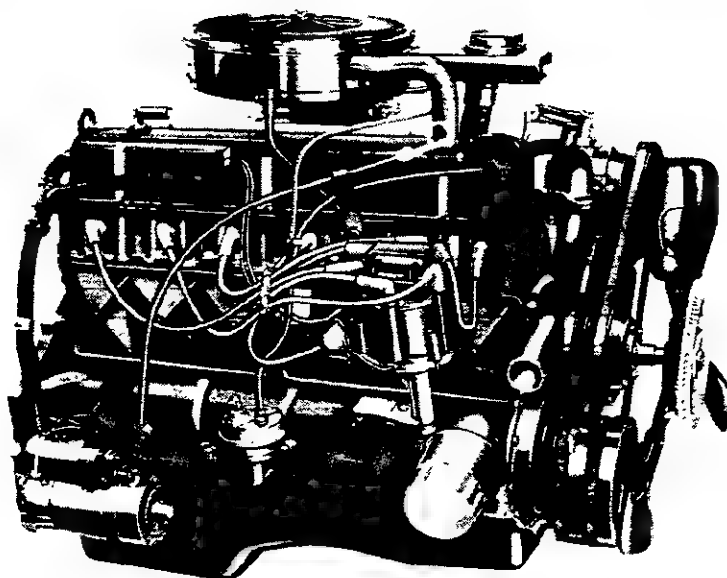

Applications

Standard: C20/2500 Pickup (43); C20/2500/C6P Pickup and C20/2500 Chassis-Cab, C30/3500; P20/2500-30/3500; K20/2500/C6P Pickup; K30/3500

Optional: None

Basic Specifications

Engine type Valve-in-head
Piston displacement (Liter/Cu. In.) 4.8/292
Bore & stroke (nominal) 3.88" x 4.12"
Compression ratio 7.8:1
Carburetor type 1-barrel
Exhaust—Single All


Test Procedures

These curves represent full-throttle performance as obtained from a dynamometer test simulating actual operating conditions when the engine is in the vehicle, with ratings corrected to barometric pressure of 29.32" mercury and 77°F dry air.

Engine Ratings


All States except California Heavy Duty Emissions (8501-lb GVWR and above)

SAE net horsepower (77°F) 115 @ 4000 rpm
SAE net torque, lb-ft (77°F) 210 @ 800 rpm

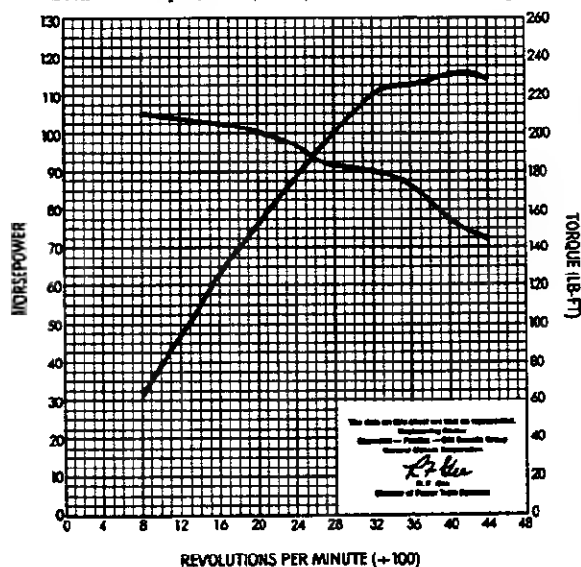


California Only Heavy Duty Emissions (8501-lb GVWR and above)

SAE net horsepower (77°F) 115 @ 3600 rpm
SAE net torque, lb-ft (77°F) 215 @ 1600 rpm

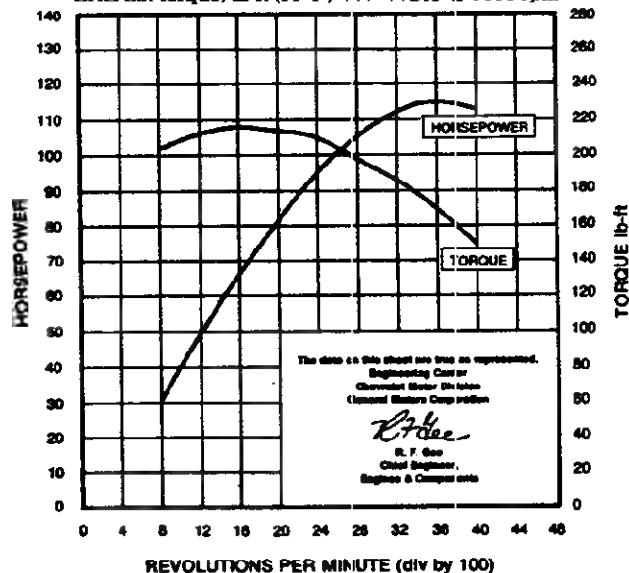

4.3 LITER (262 Cu. In.) EFI V6

(Ordering Code LB4)

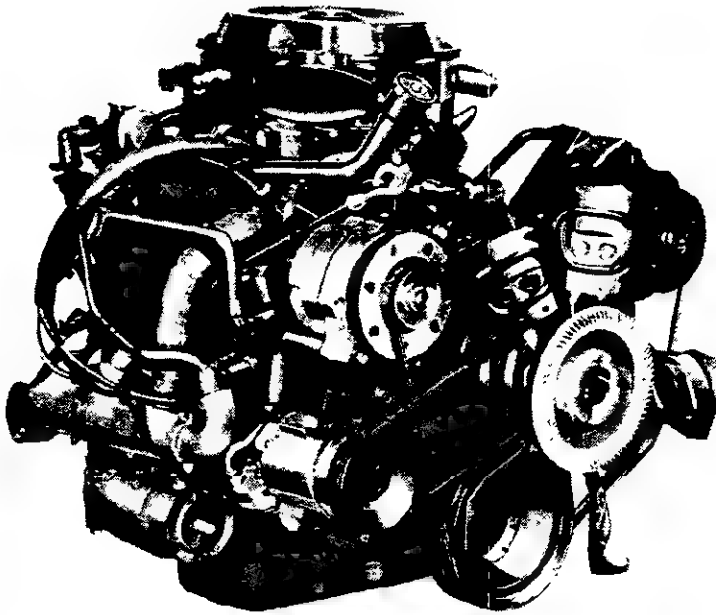

Typical Engine Shown

Applications

Standard: Astro/Safari Passenger Van
Optional: Astro/Safari Cargo Van

Basic Specifications

Engine type	Valve-in-head
Piston displacement (Liter/Cu. In.)	4.3/262
Bore & stroke (nominal)	4.0" x 3.48"
Compression ratio	9.3:1
Fuel delivery	EFI
Exhaust—Single	All

Test Procedures

These curves represent full-throttle performance as obtained from a dynamometer test simulating actual operating conditions when the engine is in the vehicle, with ratings corrected to barometric pressure of 29.32" mercury and 77°F dry air


Engine Ratings

Light Duty Emissions

Astro/Safari

(8500-lb GVWR and below)

SAE net horsepower (77°F) 145 @ 4000 rpm
SAE net torque, lb-ft (77°F) 230 @ 2400 rpm

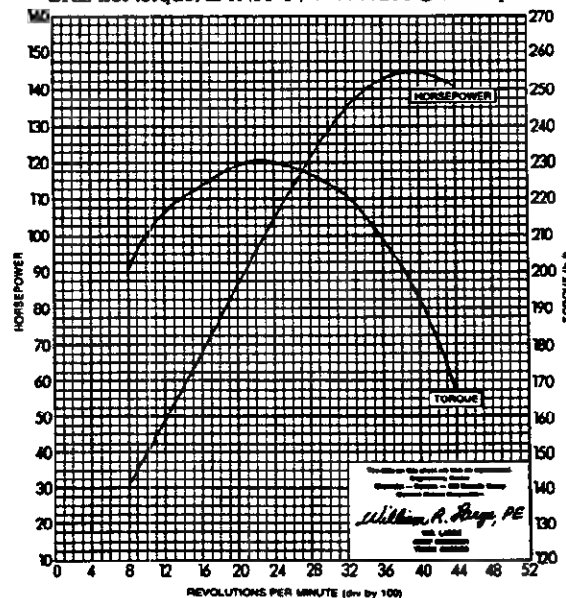

4.3 LITER (262 Cu. In.) 4-bbl V6

(Ordering Code LB1)

Applications


Standard: C10/1500-20/2500 (w/o C6P) Regular Cab
Pickup; K10/1500 Pickup; G10/1500-20/2500;
G30/3500 Chevy Van/Vandura (w/o C6P)
Optional: None

Basic Specifications

Engine type Valve-in-head
Piston displacement (Liter/Cu. In.) 4.3/262
Bore & stroke (nominal) 4.0" x 3.48"
Compression ratio 9.3:1
Carburetor type 4-barrel
Exhaust—Single All

Test Procedures

These curves represent full-throttle performance as obtained from a dynamometer test simulating actual operating conditions when the engine is in the vehicle, with ratings corrected to barometric pressure of 29.32" mercury and 77°F dry air.

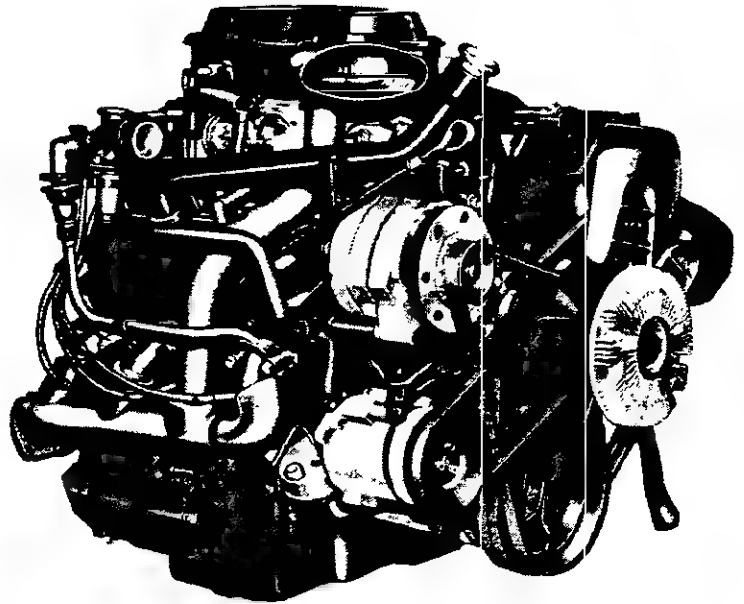


Typical Engine Shown

Engine Ratings

Light Duty Emissions C10/1500, G20/2500 Pickups; K10/1500 Pickups


(8500-lb GVWR and below)

SAE net horsepower (77°F) 155 @ 4000 rpm
SAE net torque, lb-ft (77°F) 230 @ 2400 rpm

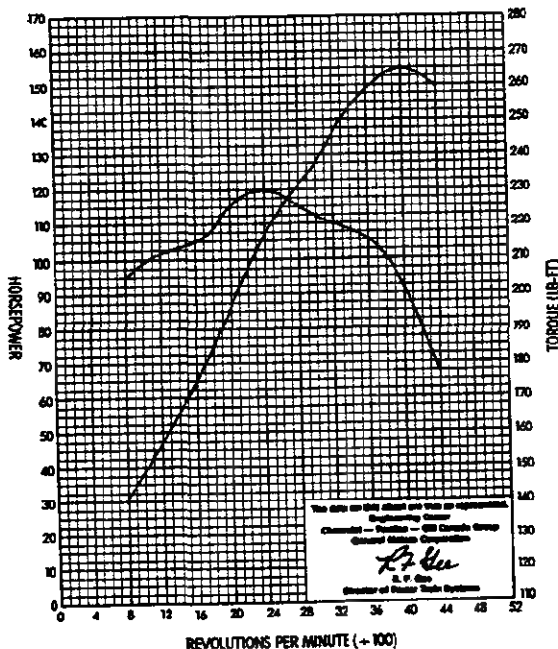

Light Duty Emissions G10/1500, G20/2500, G30/3500 (8500-lb GVWR and below)

SAE net horsepower (77°F) 145 @ 4000 rpm
SAE net torque, lb-ft (77°F) 225 @ 2400 rpm

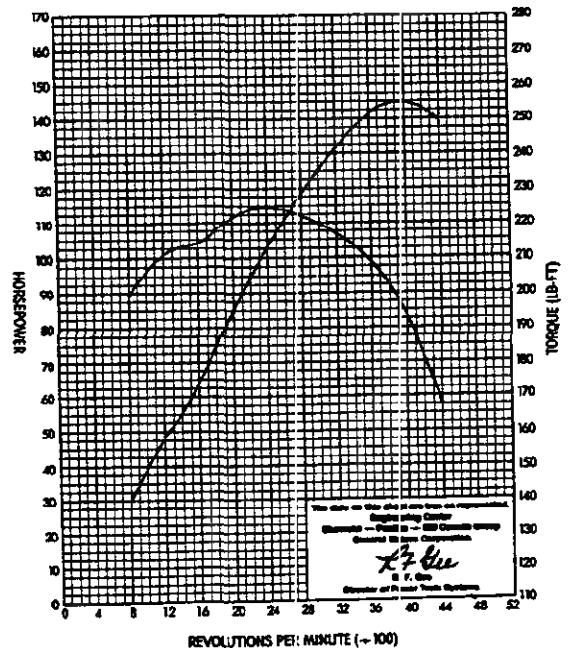

4.3 LITER (262 Cu. In.) V6 ENGINE

SPECIFICATIONS

	El Camino/Caballero 4.3 Liter/262 V6 EFI
Oil Filter	Full flow, throwaway
Capacity (qts)	.43
Oil Pump	
Type	Spur gear; distributor shaft driven
Capacity (gpm)	4.5 @ 2000 rpm
Normal Pressure (psi)	30-40 @ 2000 rpm
Pistons	
Material	Cast aluminum alloy
Skirt	Closed
Head	Sump with chamfer top edge
Piston Pins	
Type	Rod shrink fit to pin
Material	Chromium steel
Piston Rings	
Compression Rings	
Number	2
Type	Upper - barrel; lower - tapered face
Material	Cast iron alloy
Oil Control Ring	
Number	1
Type	Multi-piece
Material	Steel
Thermostat	Harrison; 195°
Valve Train	
Type	Individually mounted rocker arms, push rod actuated
Lifters	Hydraulic
Rocker Arm Ratio	1.50:1
Valve Guides	Integral with cylinder head
Valve Lash	Zero
Intake Valves	
Material	Alloy steel
Diameter (in.)	1.94
Face Coatings	None
Seats	Machined in cylinder head
Exhaust Valves	
Material	High alloy steel
Diameter (in.)	1.50
Face Coating	Aluminized
Seats	Machined in cyl. head; induction hardened
Rotators (exhaust)	Yes (exhaust valves only)
Water Pump	
Type	Centrifugal
Capacity (gpm)	24.4 @ 2000 rpm

4.3 LITER (262 EFI) V6

SPECIFICATIONS

		El Camino/Caballero
		4.3 Liter/262 V6 EFI
Basic Description		V6; Valve-in-head
Displacement (Liter/Cu. In.)		4.3/262
Bore & Stroke		4.0 x 3.48
Compression Ratio		9.3:1
Firing Order		1-6-5-4-3-2
SAE Net Horsepower @ rpm		140 @ 4000
SAE Net Torque (lb-ft) @ rpm		225 @ 2000
Air Cleaner		Thermostatically controlled; oil-wetted paper element
Camshaft		
Material		Cast alloy iron
Intake Valve	Opens	42° BTC
(excluding ramps)	Closes	258° ATC
Exhaust Valve	Opens	258° BTC
(excluding ramps)	Closes	52° ATC
Intake Duration w/o ramp		300°
Exhaust Duration w/o ramp		310°
Carburetor		
Type		Throttle Body Injection
Make		Rochester
Venturi ID (in)		N.A.
Throttle Bore (in)		1.68
Choke Control		None
Connecting Rods		
Material		Press-forged steel
Length (in)		5.70
Bearings		Con-ecc premium aluminum
Crankcase Ventilation		Closed positive
Crankshaft		
Material		Cast nodular iron
Number of Counterweights		6
Main Journal dia (in)		2.448-2.449
Crankpin Journal dia (in)		2.249-2.250
Torsional Damper		Inertia; hysteresis
Bearings		Premium aluminum
Distributor		High Energy Unit, Delco-Remy; electronic spark timing
Fuel Filter		
Carburetor		Replaceable, pleated fiber element
Fuel Tank		Plastic mesh screen
Lubrication System		Full pressure
Main Bearings		Direct pressure
Camshaft Bearings		Direct pressure
Timing Gear		Gravity
Connecting Rods		Direct pressure
Valve Mechanism		Pressure & gravity
Cylinder Walls		Splash
Piston Pins		Splash
Oil Capacity (qts)		
With filter change		4
W/o filter change		4

4.3 LITER (262 Cu. In.) EFI V6

(Ordering Code LB4)

Applications

Standard: El Camino/Caballero

Optional: None

Basic Specifications

Engine type Valve-in-head
Piston displacement (Liter/Cu. In.) 4.3/262
Bore & stroke (nominal) 4.0" x 3.48"
Compression ratio 9.3:1
Fuel delivery EFI
Exhaust Single

Test Procedures

These curves represent full-throttle performance as obtained from a dynamometer test simulating actual operating conditions when the engine is in the vehicle, with ratings corrected to barometric pressure of 29.32" mercury and 77°F dry air

Engine Ratings

SAE net horsepower (77°F) 140 @ 4000 rpm
SAE net torque, lb ft (77°F) 225 @ 2000 rpm

2.8 LITER (173 Cu. In.) V6

SPECIFICATIONS

	2.8 Liter/173 2-bbl V6
Oil Filter	Throwaway
Capacity (qts)	.43
Oil Pump	
Type	Spur gear; distributor shaft driven
Capacity (gpm)	2.5 @ 2000 rpm
Normal Pressure (psi)	50 @ 2000 rpm
Pistons	
Material	Cast aluminum alloy
Skirt	Closed
Head	Flat
Piston Pins	
Type	Rod shrink fit to pin
Material	Chromium steel
Piston Rings	
Compression Rings	
Number	2
Type	Upper—barrel; lower—inside bevel
Material	Cast iron alloy
Oil Control Ring	Spacer-expander with upper and lower rails
Number	1
Type	Multi-piece
Material	Steel
Thermostat	Harnson, 195°
Valve Train	
Type	Individually mounted rocker arms, push rod actuated
Lifters	Hydraulic
Rocker Arm Ratio	1.50:1
Valve Guides	Integral with cylinder head
Valve Lash	Zero
Intake Valves	
Material	Alloy steel
Diameter (in.)	1.60
Face Coatings	None
Seats	Machined in cylinder head
Exhaust Valves	
Material	High alloy steel
Diameter (in.)	1.31
Face Coating	None
Seats	Machined in cyl. head; induction hardened
Rotators (exhaust)	Yes
Water Pump	
Type	Centrifugal
Capacity (gpm)	20 @ 2000 rpm


2.8 LITER (173 EFI) V6

SPECIFICATIONS

		2.8 Liter/173 EFI V6
Basic Description		V6; Valve-in-head
Displacement (Liter/Cu. In.)		2.8/173
Bore & Stroke		3.50 x 2.99
Compression Ratio		8.5:1
Firing Order		1-2-3-4-5-6
SAE Net Horsepower @ rpm		125 @ 4800
SAE Net Torque (lb-ft) @ rpm		150 @ 2200
Air Cleaner		Replaceable paper element
Camshaft		
Bearings		Steel backed aluminum w/overplate
Intake Valve	Opens	7° BTC
(excluding ramps)	Closes	50° ABC
Exhaust Valve	Opens	51° BBC
(excluding ramps)	Closes	24° ATC
Intake Duration w/o ramp		237°
Exhaust Duration w/o ramp		255°
Fuel System		
Type		Throttle Body Injection
Make		Rochester
Throttle Bore (in)		1.38
Choke Control		None
Connecting Rods		
Material		Drop-forged steel
Length (in)		5.70
Bearings		Steel-backed aluminum w/overplate
Crankcase Ventilation		Closed positive
Crankshaft		
Material		Cast nodular iron
Number of Counterweights		2
Main Journal dia (in)		2.49
Crankpin Journal dia (in)		2.00
Torsional Damper		Inertia; rubber mounted
Bearings		Upper and Lower - premium aluminum
Distributor		High Energy Unit, Delco-Remy
Fuel Filter		
Carburetor		Pleated fiber element
Fuel Tank		Plastic strainer
Lubrication System		Controlled full pressure
Main Bearings		Direct pressure
Camshaft Bearings		Direct pressure
Timing Gear		Centrifugally sprayed
Connecting Rods		Direct pressure
Valve Mechanism		Pressure & gravity
Cylinder Walls		Cross sprayed throw-off from rod bearing
Piston Pins		Cross sprayed throw-off from rod bearing
Oil Capacity (qts)		
With filter change		4
W/o filter change		3.5

2.8 LITER (173 EFI) V6

(Ordering Code LL2)

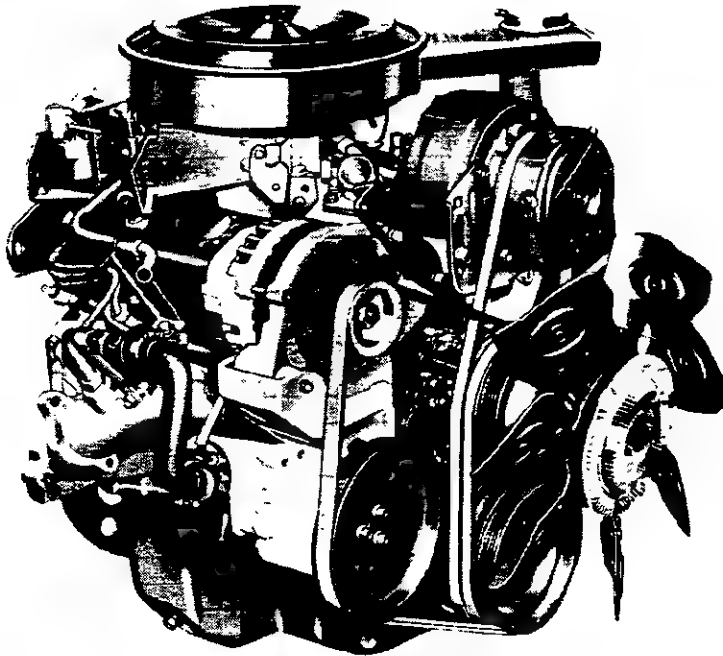

Applications

Standard: None

Optional: S-10/15 Pickups, Chassis-Cab, Blazer/Jimmy

Basic Specifications


Engine type	Valve-in-head
Piston displacement (Liter/Cu. In.)	2.8/173
Bore & stroke (nominal)	3.50" x 2.99"
Compression ratio	8.5:1
Fuel delivery	EFI
Exhaust—Single	All

Test Procedures

These curves represent full-throttle performance as obtained from a dynamometer test simulating actual operating conditions when the engine is in the vehicle, with ratings corrected to barometric pressure of 29.32" mercury and 77°F dry air.

Engine Ratings

SAE net horsepower (77°F)	125 @ 4800 rpm
SAE net torque, lb-ft (77°F)	150 @ 2200 rpm

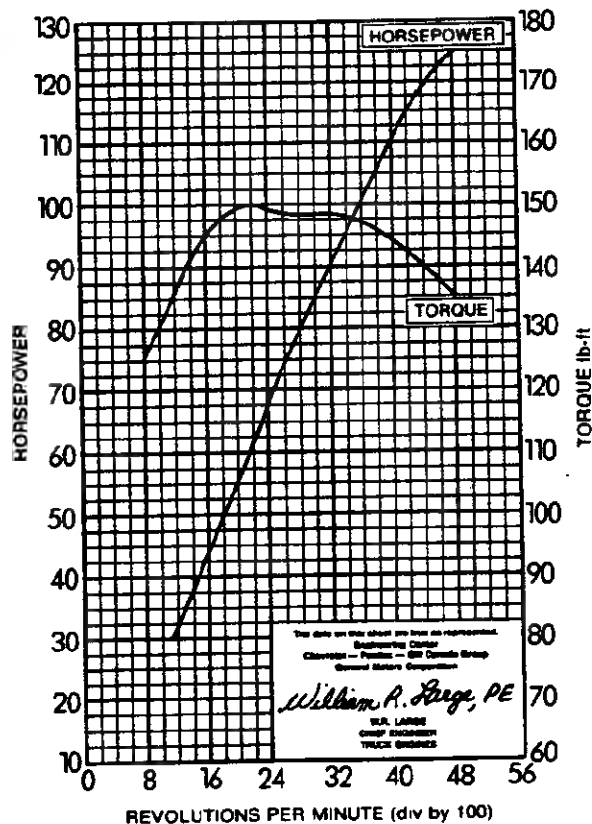

2.5 LITER (151 EFI) L4

SPECIFICATIONS

	2.5 Liter/151 EFI L4
Oil Capacity (qts)	
With filter change	3.0
W/o filter change	2.68
Oil Filter	
Standard	Full flow; throwaway type
Capacity (pt)	0.32
Oil Pump	
Type	Spur Gear
Capacity (gpm)	2.4 @ 2200 rpm
Normal Pressure (psi)	45 @ 2200 rpm
Pistons	
Type	Cam-ground
Material	Aluminum alloy
Skirt	
Head	Flat
Piston Pins	
Type	Rod shrink fit to pin
Material	Aluminum filled fine grain steel
Piston Rings	
Compression Rings	
Number	2
Type	Upper—barrel; lower—inside bevel
Material	Cast iron alloy
Oil Control Rings	
Number	1
Type	Multi-piece
Material	Chrome plated steel
Thermostat	Harnson; 195°F
Valve Train	
Type	Individually mounted rocker arms, push rod actuated
Tappets	Hydraulic
Valve Lash	Zero
Intake Valves	
Material	Alloy steel and chrome plated stems
Head Diameter (in)	1.72
Face Coating	None
Seats	Machined in cylinder head
Exhaust Valves	
Material	High alloy steel
Head Diameter (in)	1.50
Face Coating	None
Seats	Machined at 30° in cylinder head, induction hardened
Rotators	None
Water Pump	
Type	Centrifugal
Capacity (gpm)	6 @ 1000 rpm

2.5 LITER (151 EFI) L4

SPECIFICATIONS

		2.5 Liter/151 EFI L4
Basic Description		Four-cylinder in-line; valve-in-head with cast iron block
Displacement (liters/cu. in.)		2.5/151
Bore & Stroke (in)		4.0 x 3.0
Compression Ratio		9.0:1
Firing Order		1-3-4-2
SAE Net Horsepower @ rpm		92 @ 4400
SAE Net Torque (lb-ft) @ rpm		134 @ 2800
Air Cleaner		Replaceable paper element
Camshaft		
Intake Valve	Opens	33° BTDC
	Closes	79° ABDC
Exhaust Valve	Opens	74° BBDC
	Closes	38° ATDC
Intake Duration		292°
Exhaust Duration		292°
Carburetor		
Type		Throttle Body Injection
Make		Rochester
Venturi ID (in)		N.A.
Throttle Bore (in)		1.69
Choke Control		None
Connecting Rods		
Material		Cast Arma steel
Length (in)		6.05
Bearings		Steel-backed aluminum with overplate
Crankcase Ventilation		Closed positive
Crankshaft		
Material		Nodular Iron
Number of Counterweights		4
Main Journals (in)		2.30
Crankpin Journal (in)		2.0
Torsional Damper		None
Bearings		Steel-backed aluminum with overplate
Distributor		High Energy Delco Remy centrifugal & vacuum advance
Fuel Filters		
Carburetor		In line throwaway type
Fuel Tank		Nylon mesh screen
Lubrication System		Controlled full pressure
Main Bearings		Direct pressure
Camshaft Bearings		Direct pressure
Connecting Rods		Direct pressure
Valves & Tappets		Pressure and Gravity
Cylinder Walls		Cross-sprayed throw-off from rod bearing
Piston Pins		Cross-sprayed throw-off from rod bearing

Ordering Code LN8

Optional: None

Engine type	In-line 4
Piston displacement (Liter/Cu. in.)	2.5/151
Bore & stroke (nominal)	4.0 x 3.0
Compression ratio	9.0:1
Fuel delivery	EFI
Exhaust	Single

These curves represent full throttle performance as obtained from a dynamometer test simulating actual operating conditions when the engine is in the vehicle, with ratings corrected to barometric pressure of 29.32" mercury and 77°F dry air.

SAE net horsepower (77°F) 92 @ 4400 rpm
SAE net torque, lb-ft (77°F) 134 @ 2800 rpm



ENGINE & COOLING

INDEX

ENGINES

Page

2.5 LITER (151 EFI) I4 ENGINE (S-10/15)	2
SPECIFICATIONS—2.5L/151 I4 ENGINE (Astro/Safari, S-10/15)	3, 4
2.8 LITER (173 2-bbl) V6 ENGINE (S-10/15)	5
SPECIFICATIONS—2.8L/173 V6 ENGINE (S-10/15)	6, 7
4.3 LITER (262 EFI) V6 ENGINE (El Camino/Caballero)	8
SPECIFICATIONS—4.3L/262 V6 ENGINE	9, 10
4.3 LITER (262 4-bbl) V6 ENGINE	11
4.3 LITER (262 EFI) V6 ENGINE	12
4.8 LITER (292 1-bbl) IN-LINE SIX ENGINE	13
SPECIFICATIONS—4.3L/262 V6 ENGINE	14, 15
5.0 LITER (305 4-bbl) V8 ENGINE (El Camino/Caballero)	17
5.0 LITER (305 4-bbl) V8 ENGINE w/ESC	18
5.0 LITER (305 4-bbl) V8 ENGINE	19
SPECIFICATIONS—5.0L/305 V8 ENGINES	20, 21
5.7 LITER (350 4-bbl) V8 ENGINE	22, 23
SPECIFICATIONS—5.7L/350 V8 ENGINES	24, 25
6.2 LITER DIESEL ENGINE FEATURES	26, 27, 28, 29
6.2 LITER (379 Cu. In.) V8 DIESEL ENGINE	30, 31
SPECIFICATIONS—6.2L/379 V8 DIESEL ENGINE	32, 33
7.4 LITER (454 4-bbl) V8 ENGINE	34
SPECIFICATIONS—7.4L/454 V8 ENGINE	35, 36

COOLING SYSTEMS

SPECIFICATIONS—STANDARD	37
SPECIFICATIONS—OPTIONAL	38, 39, 40, 41, 42

FUEL TANKS

SPECIFICATIONS	43
----------------------	----

EMISSION CONTROLS

EMISSION CONTROL EQUIPMENT	44, 45, 46
----------------------------------	------------

ENGINE & COOLING

VALUE! FEATURES (CONT'D)

Early Fuel Evaporation (Gasoline engine models)

- Vacuum motor closes exhaust manifold heat valve on cold engine
- Hot gases flowing around inlet manifold preheat incoming fuel
- Fast warm-up, good drivability
- Used on most engines.

High Energy Ignition System (Gasoline engine models)

- Magnetic pulse generator, electronic module replace ignition points, condenser and rubbing block
- Coil design provides a spark up to 85% hotter than conventional system
- Solid-state design eliminates cost of replacing points, condenser
- Fires worn plugs
- Reduces cost of frequent plug replacement
- Fires lean or marginal mixtures
- Quick starts help reduce battery drain.

Catalytic converter (Gasoline engine models)

- Changes hydrocarbons and carbon monoxide to less harmful emissions
- Permits tuning engines for better drivability, increased fuel efficiency
- Stainless steel shell and exhaust pipe
- Standard on all Light-duty trucks up to 8500 lbs. GVWR (except Step-Van/Value Van, FC Chassis)
- Requires use of unleaded fuel exclusively.

Coolant recovery system

- Excess coolant collects in reservoir, returns to radiator automatically when it cools
- Helps maintain proper coolant levels
- Standard on all C, K, G, P, S, M models.

ENGINE & COOLING

VALUE FEATURES

2.5 Liter (151 Cu. In.) I4 engine (Astro/Safari, S-10/15 models only)

- Standard engine on all Astro/Safari and S-10/15 4x4, extended cab, Chassis-Cab, Blazer, and 4x2 117.9" WB pickup gasoline engine models
- Electronic fuel injection.

2.8 Liter (173 Cu. In.) V6 engine (S-10/15 models only)

- Electronic Fuel Injection (EFI)
- 8.5 to 1 compression ratio
- More horsepower and torque for heavy-duty jobs and trailering applications.

4.3 Liter (262 Cu. In.) V6 engine

- Staged 4-barrel carburetor for more efficient performance (EFI on El Camino/Caballero and Astro/Safari models)
- Cylinder head with swirl-port design
- Centralized spark plugs
- Even firing
- High compression (9.3:1)
- Electronic spark control to control spark knock.

4.8 Liter (292 Cu. In.) I6 engine

- Larger displacement for added load-hauling agility
- Same engine used in medium-duty trucks for its durability. Features include: aluminum alloy pistons, forged steel connecting rods, aluminized face intake valves, with chrome plated stem, inlet valve rotator, inconel faced exhaust valves with rotators and hardened seats.

5.0 Liter (305 Cu. In.) V8 engine with Electronic Spark Control

- Good performance, efficient operation on unleaded fuel
- Horsepower and torque ratings similar to the 5.7 liter V8
- High 9.2 to 1 compression ratio (9.5:1 on El Camino/Caballero models)
- Electronic spark control unit eliminates spark knock by adjusting spark advance automatically.

5.7 Liter (350 Cu. In.) V8 engine

- Available for higher all-around performance requirements
- Four-barrel carburetor provides added power when needed
- Comes with cast-iron 4.00-in.-bore cylinder case with forged steel connecting rods.

7.4 Liter (454 Cu. In.) V8 engine

- Available for big loads and heavy towing. This high-torque 454 V8 with a 4-barrel carburetor operates on regular grade gasoline. Camshaft is designed for added efficiency.

6.2 Liter (379 Cu. In.) V8 Diesel engine

- The 6.2 liter V8 diesel engine (RPO LH6 with light-duty emissions, and RPO LL4 with heavy-duty emissions) is available on all C/K/G/P models, except G10/1500 Chevy Van/Vandura and G10/1500 Sportvan/Rally and the 178" WB Motor Home Chassis. This engine, introduced in 1982, is designed specifically for truck applications with heavy usage; it features heavy-duty construction with emphasis on fuel efficiency with excellent emission control characteristics.

C/K CHASSIS-CAB

SOLID AND TWO-TONE* EXTERIOR COLOR COMBINATIONS

The application of paint for solid and two-tone exterior color combinations is shown below.

Solid color paint (ZY1) is standard on all models. All painted areas of the body and front end sheet metal are the same color.




GMC model shown (Chevrolet model available)



Chevrolet model shown (GMC model available)

Conventional two-tone (ZY2) consists of color code 1 on the roof and cab back panel above the belt line, with color code 2 on the remainder of the cab and on the front end sheet metal. Includes cab back panel applique and molding, except with Silverado/Sierra Classic Model Option, where it is already included.

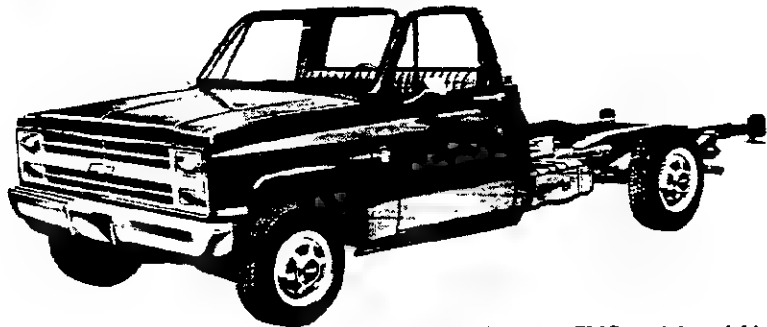

Chevrolet model shown (GMC model available)



GMC model shown (Chevrolet model available)

*Optional at extra cost.

C/K CHASSIS-CAB




INTERIOR AND EXTERIOR COLOR AVAILABILITY CHART

Please Note: Below are the interior trim color and exterior paint combinations recommended by Chevrolet/GMC. The only available color code 1/color code 2 exterior color combinations are those shown in the chart below; however, any available interior trim color may be ordered with one of these exterior color combinations if that particular combination is desired by the customer.

			REGULAR CAB					BONUS/CREW CAB		
INTERIOR COLORS	Decor		Blue	Burgundy	Charcoal	Mahogany	Saddle Tan	Blue	Burgundy	Saddle Tan
CUSTOM DELUXE/SIERRA	Std.		VDD1	VEE1	VJJ1	VNN1	VSS1	VDD1	VEE1	VSS1
Vinyl Bench Seat			CDD1	CEE1	CJJ1	CNN1	CSS1			
Deluxe Cloth Bench Seat			XDD1	XEE1	XJJ1	XNN1	XSS1			
Custom Vinyl Bench Seat										
SCOTTSDALE/HIGH SIERRA	Z62							VDD1	VEE1	VSS1
Vinyl Bench Seat			CDD1	CEE1	CJJ1	CNN1	CSS1			
Deluxe Cloth Bench Seat			XDD1	XEE1	XJJ1	XNN1	XSS1	XDD1	XEE1	XSS1
Custom Vinyl Bench Seat								LDD1	LEE1	LSS1
Custom Cloth Bench Seat										
SILVERADO/SIERRA CLASSIC	YE9		XDD1	XEE1	XJJ1	XNN1	XSS1	XDD1	XEE1	XSS1
Custom Vinyl Bench Seat			LDD1	LEE1	LJJ1	LNN1	LSS1	LDD1	LEE1	LSS1
Custom Cloth Bench Seat										
EXTERIOR COLORS w/ZY1, ZY2 PAINT	Color Code 1	Color Code 2	RECOMMENDED INTERIOR TRIM COLOR							
BLACK, MIDNIGHT	19	19		X	X	X	X		X	X
Copper, Canyon (Metallic)	19	65			X		X			X
Gold, Nevada (Metallic)	19	67			X		X			X
Gray, Steel (Metallic)	19	90			X					
Tan, Doeskin	19	61			X		X			X
White, Frost	19	12			X					
BLUE, LIGHT (Metallic)	21	21	X		X			X		
BLUE, MIDNIGHT	29	29	X		X			X		
Blue, Light (Metallic)	29	21	X					X		
Gray, Steel (Metallic)	29	90	X					X		
White, Frost	29	12	X					X		
BRONZE, INDIAN (Metallic)	66	66				X	X			X
COPPER, CANYON (Metallic)	55	55			X	X	X			X
GOLD, NEVADA (Metallic)	67	67			X	X	X			X
GRAY, STEEL (Metallic)	90	90	X	X	X			X	X	
Black, Midnight	90	19			X					
Blue, Light (Metallic)	90	21	X					X		
Blue, Midnight	90	29	X					X		
Red, Apple	90	72			X					
RED, APPLE	72	72		X	X		X		X	X
Gray, Steel (Metallic)	72	90		X	X				X	
White, Frost	72	12		X					X	
TAN, DOESKIN	61	61			X	X	X			X
Black, Midnight	61	19			X		X			X
Bronze, Indian (Metallic)	61	66				X	X			X
Copper, Canyon (Metallic)	61	55					X			X
Gold, Nevada (Metallic)	61	67					X			X
Red, Apple	61	72		X			X		X	X
White, Frost	61	12				X	X			X
WHITE, FROST	12	12	X	X	X	X	X	X	X	X
Black, Midnight	12	19		X	X				X	
Blue, Light (Metallic)	12	21	X					X		
Blue, Midnight	12	29	X					X		
Bronze, Indian (Metallic)	12	66				X	X			X
Copper, Canyon (Metallic)	12	55					X			X
Gold, Nevada (Metallic)	12	67					X			X
Gray, Steel (Metallic)	12	90			X					
Red, Apple	12	72		X					X	
Tan, Doeskin	12	61					X			X



C/K CHASSIS-CAB

CAB DIMENSIONS*

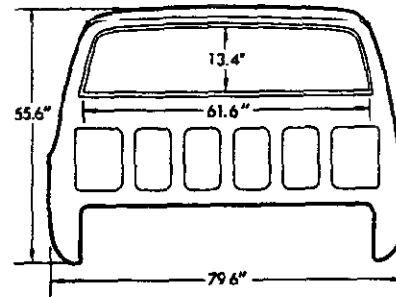


Glass Area (sq. in.)

Windshield.....	1421	Rear side door window (each side) on Crew Cab including fixed window. 488
Front side door window (each side) including ventipanes	470	Rear window 771A ▲675 sq. in. with sliding rear window.

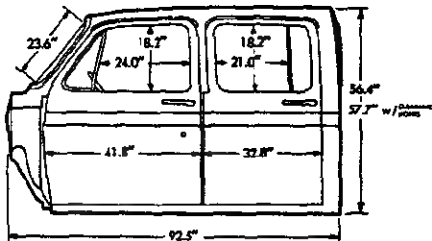

(Crew Cab model)

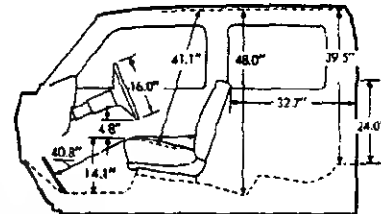


(Bonus Cab model)

* All interior dimensions measured with front seat in rearmost position. Seat travel is 5"


INSTRUMENT CLUSTERS

Standard Cluster with warning lights for engine temperature, generator, and oil pressure. Diesel engine models will also have warning lights for glow plugs, low coolant and water-in-fuel (or fuel filter)

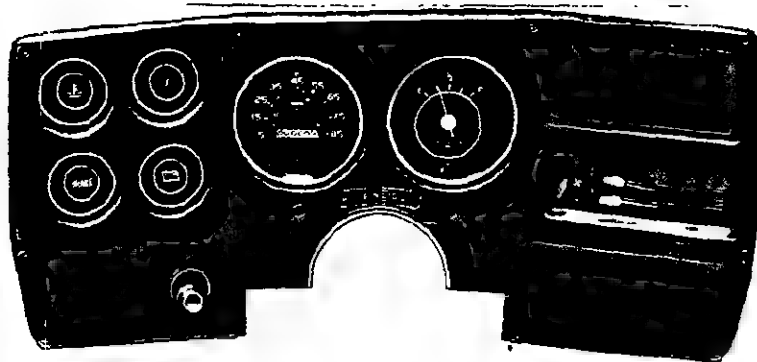


Optional Cluster (RPO Z53) with voltmeter, engine temperature gage, and oil pressure gage. Included in Silverado/Sierra Classic model option (RPO YE9) along with bright brush-finished trim, as illustrated. Cluster faceplate for Custom Deluxe/Sierra (Std.) models has black crackle finish. An electric clock (RPO U35), shown at lower left, is available for use with the optional cluster.

Optional air conditioning outlets and radio also shown in illustration.

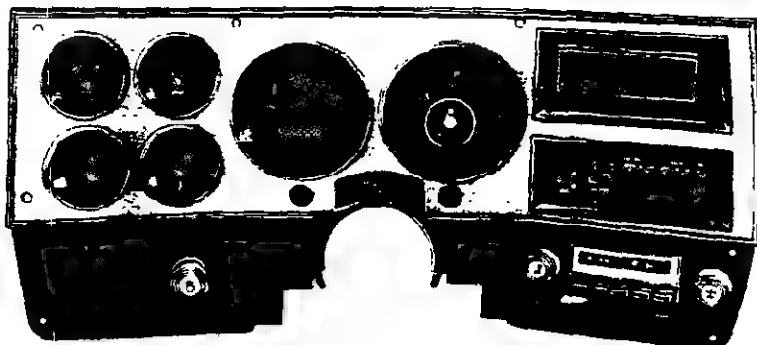

C/K CHASSIS-CAB

STANDARD CAB FEATURES

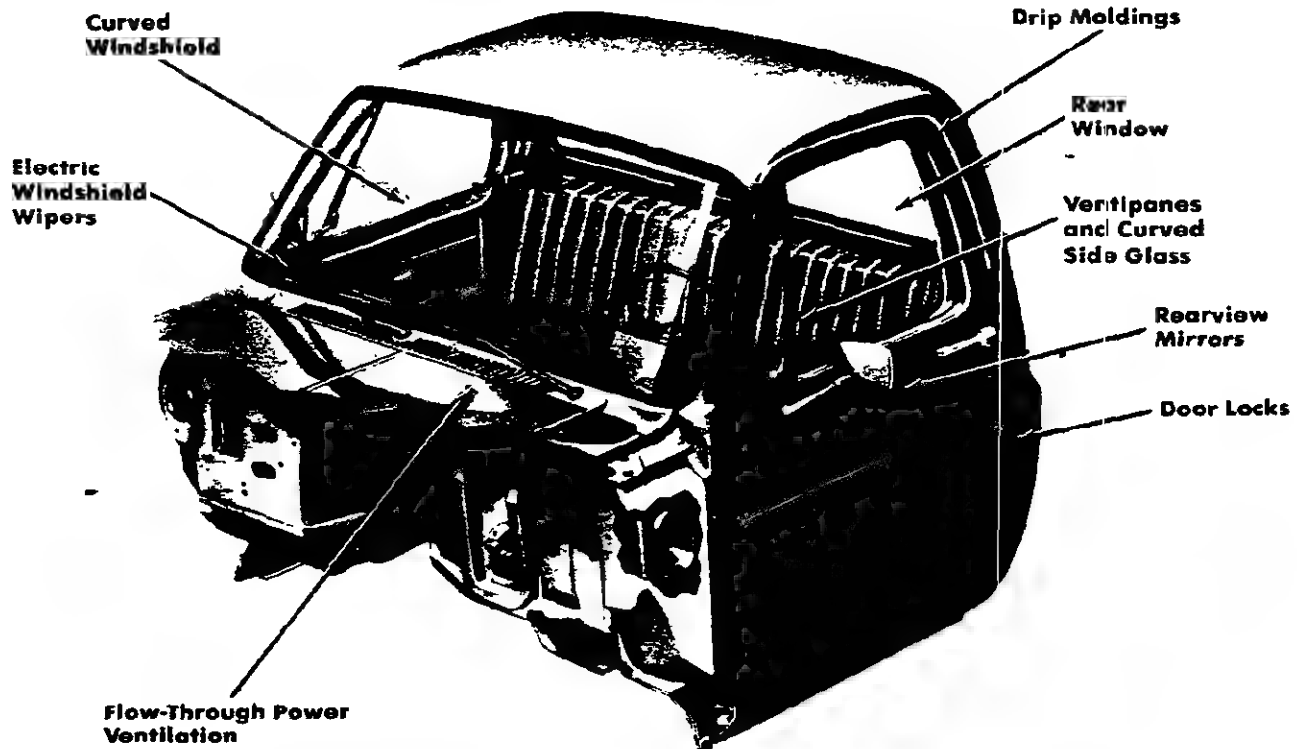

Curved Windshield—The large, one-piece windshield of laminated safety glass has an area of approximately 1447 square inches for excellent visibility.

Rear Window—The rear window is of solid safety glass with a 790 square inch area.

Electric Windshield Wipers—High-capacity, 2-speed motor provides constant wiping action regardless of engine load or accelerator position. Wipers have 16-inch blades. Wiper arms and the metal portions of the blades have a black finish. Electric washers with a 3-pint capacity reservoir are also standard. Dual on/off washer nozzles assure efficient washing action.

Drip Moldings—Bright metal moldings over side doors.

Flow-Through Power Ventilation—With ignition switch on and heater fan switch on, outside air enters the cab through the louvers in the cowl air intake grille between the hood and the windshield—away from road

dust, heat and fumes. The air passes through screened inlets into a plenum chamber built into the cowl, where water is separated from the air and drained out. Air enters the driver compartment through the heater (or optional air conditioning) system and exits through a pressure relief valve in each door. Additional air may be admitted into the interior through two inlets—one on the right side (except with optional air conditioning) and one on the left side of the lower cowl structure. Inlet valves are operated by levers integral with the inlet assemblies.

Ventipanes and Curved Side Glass—Additional flow of outside air can be controlled by a pivot-type ventipane in each front door. Friction-type latches with push-button locks and smoothly contoured handles assure excellent sealing and security. Ventipanes, as well as curved door windows, are of solid safety glass with an area of 546 square inches for each side. (Crew Cab and Bonus Cab rear side door glass area—488

sq. in. each.)

Rearview Mirrors—Standard chrome exterior mirrors are of the fixed arm type with 5-7/16" wide x 4" high adjustable heads. Both right-hand and left-hand units are provided.


Many optional mirror combinations are also available. See the Optional Equipment listing for each model.

Door Locks—All cab models include left & right hand key-operated (front) door locks as standard equipment. Depression of inside pushbuttons prevents accidental front and rear door opening and provides keyless front door locking when leaving the vehicle. Door lock key is separate from the ignition key for theft protection.

Identification and Clearance Lights—All models with second unit bodies 80" wide or over, or models with dual rear wheels, are equipped with cab identification and clearance lights. See individual model specification pages.

C/K CHASSIS-CAB


CAB CONSTRUCTION

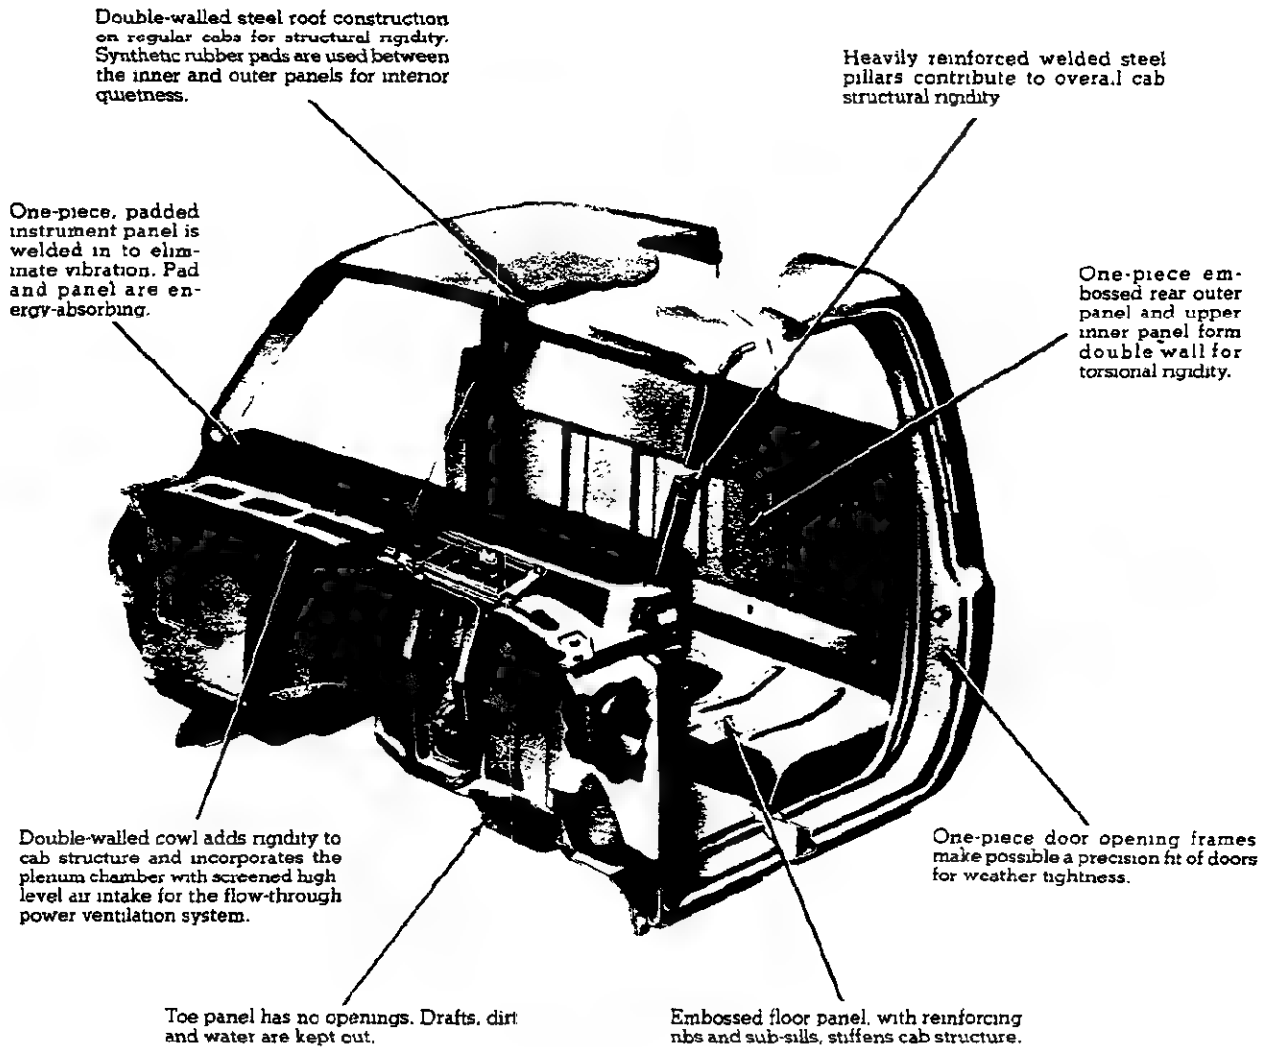

CAB MOUNTINGS

Typical Cab Mount shown.

Both front and rear cab mounts used are the compression-rebound type for quietness and durability.



NOTES

C/K CHASSIS-CAB

SILVERADO/SIERRA CLASSIC MODEL OPTION—RPO YE9 (FOR CREW CAB AND BONUS CAB MODELS)


This option includes all items in the Scottsdale/High Sierra model option plus the additions or substitutions listed below



Chevrolet model shown (GMC model available)

EXTERIOR

- **Bright Appearance Items:**
 - "Silverado/Sierra Classic" nameplates, with series designation, on front fenders
 - Chrome-trimmed grille and headlamp bezels (Chevrolet models only)
 - Cab back panel applique molding
- **Cab-to-Fender Insulators**
- **Grille and Headlamp Bezel Paint:** Dark argent (Chevrolet), argent/dark argent (GMC)
- **Hood Insulator**
- **Special Headlamps:** Rectangular; dual RH and LH

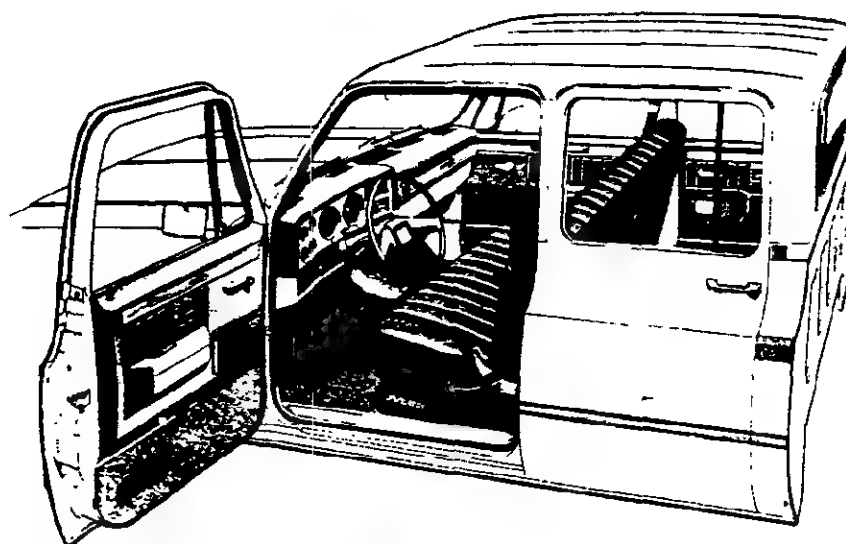


INTERIOR

- **Bright Appearance Items:**
 - "Silverado/Sierra Classic" nameplate on instrument panel pad
 - MM4 four-speed transmission shift lever (C2-3 models)
 - Trim on door trim panels and horn button
- **Cowl Panel Trim:** Color-Keyed plastic on entire surface of cowl side panels
- **Door Trim Panels:** Special color-keyed molded plastic with pewter-toned brush-finished upper decorative inserts having bright, black, and silver borders; cloth inserts in armrest area; vinyl storage pocket and door closing assist straps (on front units only); plus carpeting and bright trim strips on lower portions
- **Floor Covering:** Color-keyed carpeting (except Bonus Cab rear compartment)
- **Instrument Cluster:** Voltmeter, oil pressure gage and engine temperature gage replace warning lamps. Includes pewter-toned brush-finished bezel
- **Instrument Panel Pad Applique:** Pewter-toned brushed finish with bright, black, and silver trim
- **Insulation:** Extra-thick insulators for entire front and rear compartment floor areas, except under rear portion of Bonus Cab floor mat
- **Seats:** Choice of: 1) all-vinyl pigskin grained trim, or 2) textured velour cloth/vinyl trim. See Interior and Exterior Color Selection Chart for color and trim availability. Note. Crew Cab models have two bench seats—seating for six; Bonus Cab models have one bench seat—seating for three
- **Steering Wheel:** Bright trim on horn button
- **Visor Mirror:** On RH sun visor

C/K CHASSIS-CAB

SILVERADO/SIERRA CLASSIC MODEL OPTION—RPO YE9 (FOR REGULAR CAB MODELS)

This option includes all items in the Scottsdale/High Sierra model option plus the additions or substitutions listed below

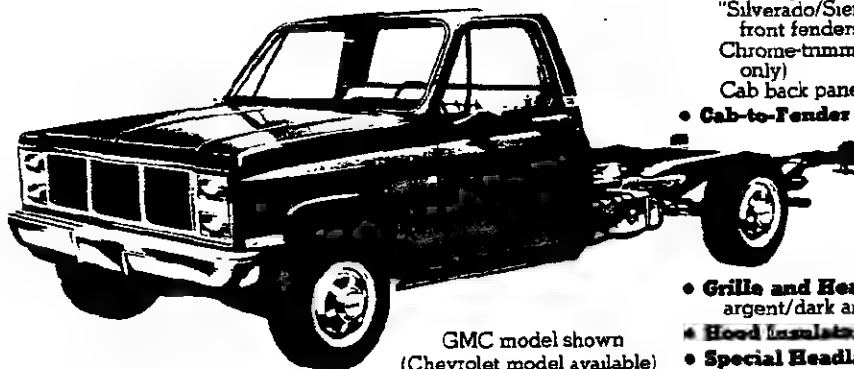


GMC model shown
(Chevrolet model available)

EXTERIOR

- **Bright Appearance Items:**
"Silverado/Sierra Classic" nameplates with series designation on front fenders
Chrome-trimmed grille and headlamp bezels (Chevrolet models only)
Cab back panel applique molding
- **Cab-to-Fender Insulators**
- **Grille and Headlamp Bezel Paint:** Dark argent (Chevrolet); argent/dark argent (GMC)
- **Hood Insulator**
- **Special Headlamps:** Rectangular; dual RH and LH

INTERIOR

- **Bright Appearance Items:**
"Silverado/Sierra Classic" nameplate on instrument panel pad
MM4 four-speed transmission shift lever (C2-3 models)
Trim on horn button
- **Cowl Panel Trim:** Color-Keyed molded plastic on entire surface of cowl side panels
- **Door Trim Panels:** Special color-keyed molded plastic with pewter-toned brush-finished upper decorative inserts having bright, black, and silver borders; cloth inserts in armrest area; vinyl stowage pocket; door closing assist straps; plus carpeting and bright trim strips on lower portions
- **Floor Covering:** Color-keyed carpeting
- **Headliner:** Color-keyed, perforated, molded cloth with fiber glass blanket backing; includes matching retainer moldings
- **Instrument Cluster:** Voltmeter, oil pressure gage, and engine temperature gage replace warning lamps; includes pewter-toned brush-finished bezel
- **Instrument Panel Pad Applique:** Pewter-toned brushed finish with bright, black, and silver trim
- **Insulation:** Headliner insulator; extra-thick insulators for entire floor area
- **Seat:** A choice of: 1) all-vinyl pigskin grained trim; or 2) textured velour cloth/vinyl trim. See Interior and Exterior Color Selection Chart for color and trim availability

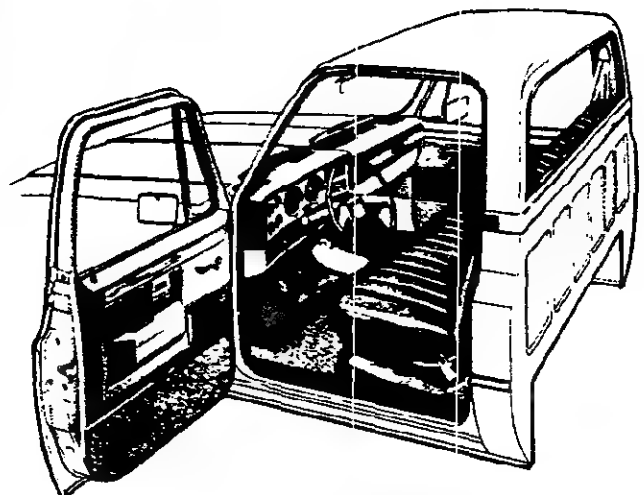

- **Steering Wheel:** Bright trim on horn button
- **Trim Panels:** Color-keyed molded plastic on windshield pillars and upper rear quarter panels
- **Visor Mirror:** On RH sun visor

CHASSIS-CAB SEATS



STANDARD FULL-DEPTH FOAM SEAT

Molded polyurethane foam pads over a steel cushion spring and frame assembly and a backrest frame assembly provide resilient support for driver and passengers, with an extra-thick pad employed for the cushion. A folding type backrest with inertia latch is used for the Regular Cab front seat and Crew Cab rear seat, providing convenient access to the stowage area behind the seat. Front seats are adjustable fore and aft. Trim is durable, easy-to-clean vinyl.

C/K CHASSIS-CAB

SCOTTSDALE/HIGH SIERRA MODEL OPTION—RPO Z62 (FOR ALL MODELS)

This option includes all Custom Deluxe/Sierra standard model items plus the additions or substitutes listed below.




Chevrolet models shown (GMC model available)

EXTERIOR

- **Bright Appearance Items:**
"Scottsdale/High Sierra" nameplates with series designation on front fenders
Chevy emblem/GMC letters at grille center

Front side marker lamp trim
Windshield and rear window reveal moldings

- **Horns:** Additional, electric, high-note

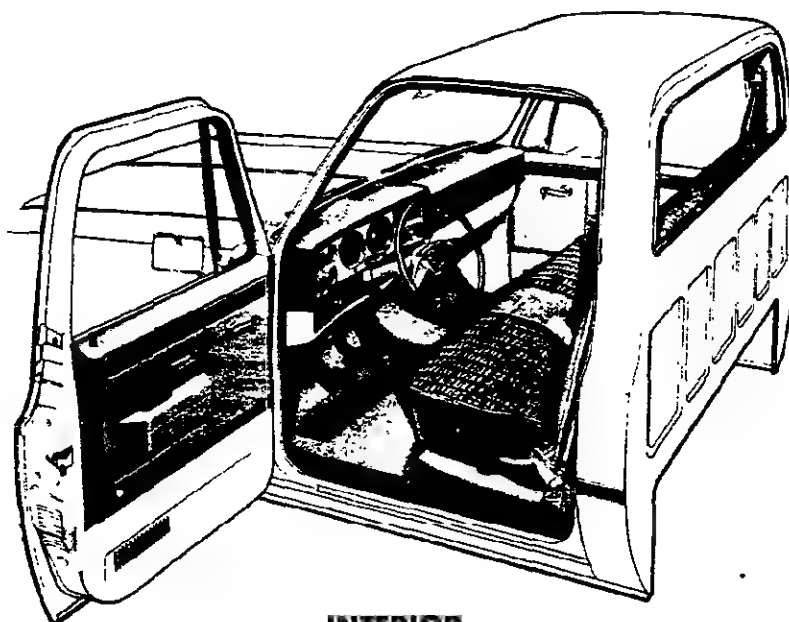

INTERIOR


- **Bright Appearance Items:**
"Scottsdale/High Sierra" nameplate on instrument panel pad
Dome lamp trim
Trim on instrument cluster bezel and instrument panel pad applique
Trim on door trim panels (regular cabs only)
- **Cigar Lighter:** With fiber optic illuminated ashtray
- **Dome Lamp:** With bright trim
- **Dome and Interior Lamp Switches:** Front door-operated (dome and interior lamps may also be activated by main light switch)
- **Door Trim Panels:** Color-keyed embossed molded plastic, with black crackle-finished upper decorative inserts having a silver border (Regular Cabs only)
- **Floor Covering:** Color-keyed rubber mats (except Bonus Cab rear compartment mat)

- **Headliner:** Full-length, mystic-colored, perforated molded cloth with fiber glass blanket backing; includes matching retainer moldings (Crew Cabs and Bonus Cabs only)
- **Insulation:** Under cowl panel, on Crew Cab and Bonus Cab headliner, and on cab back panel
- **Pillar Trim Panels:** Mystic molded plastic on windshield pillars and center door pillars (Crew Cabs and Bonus Cabs only)
- **Seats:** See Interior and Exterior Color Selection Chart for color and trim availability
Regular Cabs—choice of: 1) dual-tone woven cloth/vinyl trim; or 2) all-vinyl pigskin grained trim
Crew Cabs and Bonus Cabs—embossed grained all-vinyl trim standard. Also available at extra cost: 1) all-vinyl pigskin grained trim; or 2) textured velour cloth/vinyl trim

C/K CHASSIS-CAB

CUSTOM DELUXE/SIERRA FEATURES—STANDARD MODEL

The Custom Deluxe/Sierra standard models include the following items as standard equipment

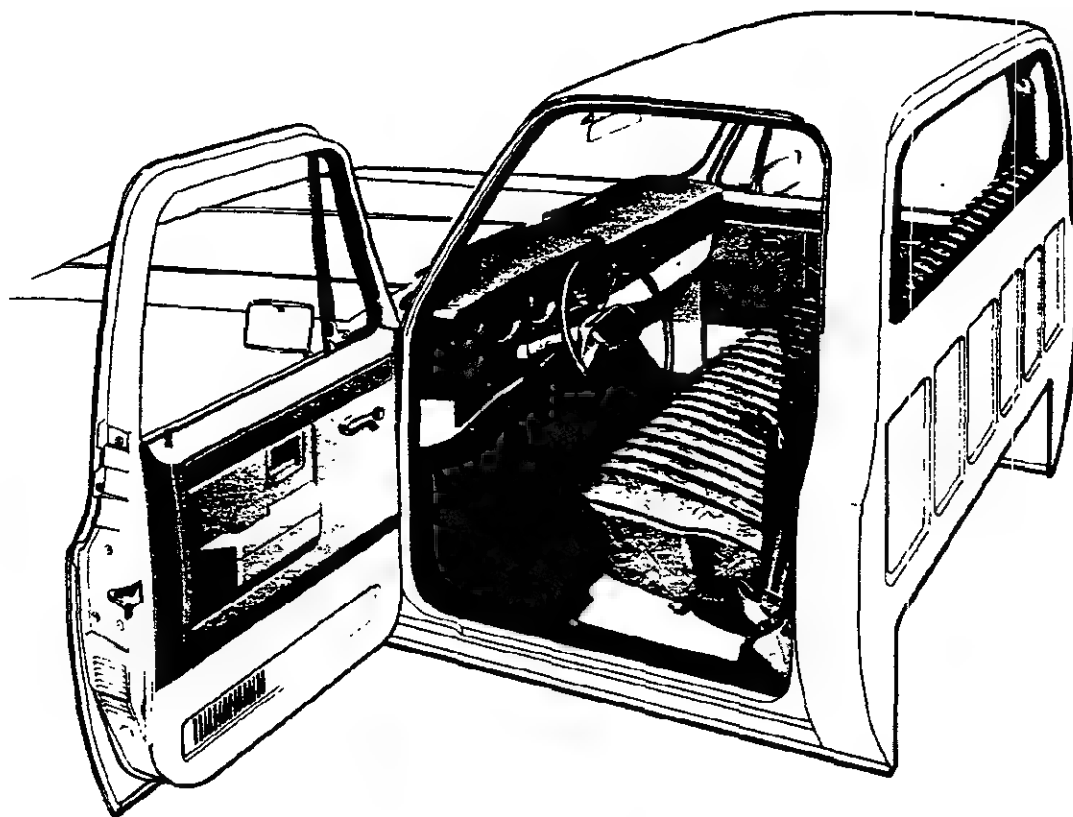


INTERIOR

- **Armrests:** RH and LH padded; integral with door trim panels
- **Ashtrays:** In middle of instrument panel (all models) and in rear door trim panels (Crew Cabs and Bonus Cabs)
- **Coat Hooks:** RH (all models); and over rear doors (Crew Cabs and Bonus Cabs)
- **Colors:**
Painted areas: Same as exterior primary color choice
Interior trim: Coordinated with seat trim color choice
- **Door Sill Plates:** Door-opening protection and floor mat retention; full-length; black plastic for Regular Cab front doors and bright metal for Bonus Cab and Crew Cab front and rear doors
- **Door Trim Panels:** Color-keyed, embossed molded plastic with integral armrests
- **Floor Covering:** Embossed black rubber mats
- **Heater and Defogger:** Deluxe-air
- **Hood Lock Release:** Handle located on LH side under instrument panel
- **Instrument Cluster Bezel:** Black crackle finish with bright trim
- **Instruments:**
Gages: Speedometer, odometer and fuel
Switches: Main, for control of exterior lights, instrument cluster lights; and cab interior lights; multi-function switch on steering column for direction signals by moving lever up or down (includes lane change position), headlamp beams by pulling lever toward driver, windshield wiper by turning band marked "WIPER" toward or away from driver, and windshield washer by pushing in the lever knob; ignition with key-in warning buzzer; hazard warning; heater fan
Warning lights: Generator, oil pressure, engine temperature, seat belt, service-parking brake, direction/hazard signal, high beam
- **Instrument Panel Control Knobs:** Soft black plastic (except wiper-washer and heater controls) with white graphic identification
- **Instrument Panel Pad:** Color-keyed, energy-absorbing foam type with grained vinyl skin; has black crackle finished applique on RH side with bright, black, and silver trim and bright "Custom Deluxe/Sierra" name plate
- **Insulation and Sound Deadening Material:** Dash (firewall), under front seat at center, under front floor mat, under rear floor mat and under rear seat at center on Crew Cabs, under rear floor mat on Bonus Cabs (center portion only in rearmost area) and between double-walled roof panel of regular cabs. NOTE: Extra-thick insulation for front portion of Crew Cab and Bonus Cab rear compartment
- **Lights:** Instrument cluster and cab interior lights
- **Mirror, Rearview:** 10" prismatic with soft vinyl rim
- **Seats:** Full-width, full depth foam bench-type with embossed grained all-vinyl trim; front (all models) and rear (Crew Cabs only); includes folding backrest for regular cab seat and Crew Cab rear seat. Also available at extra cost: 1) dual-tone woven cloth/vinyl trim; or 2) all-vinyl pigskin grained trim. See Interior and Exterior Color Selection Chart for color and trim availability. NOTE: Crew Cab models have two bench seats—seating for six; Bonus Cab models have one bench seat—seating for three.
- **Seat Belts:** Front (all models): non-detachable combination lap and shoulder belts for outboard positions with emergency-locking retractors and switch in driver's lap belt retractor for buzzer warning system; lap belt with manual adjustment for center position. Rear (Crew Cabs only) lap belts with emergency-locking retractors for outboard positions; lap belt with manual adjustment for center positions. All seat belts are color-keyed with pushbutton type buckles
- **Steering Wheel and Column:** 16" black, soft plastic wheel with 2 spokes; black energy-absorbing steering column with anti-theft locking feature
- **Storage Box:** In RH side of instrument panel; door has bright turn-type latch release
- **Sunshades:** RH and LH padded; color-keyed

C/K CHASSIS-CAB


CUSTOM DELUXE/SIERRA FEATURES—STANDARD MODEL

The Custom Deluxe/Sierra standard models include the following items as standard equipment

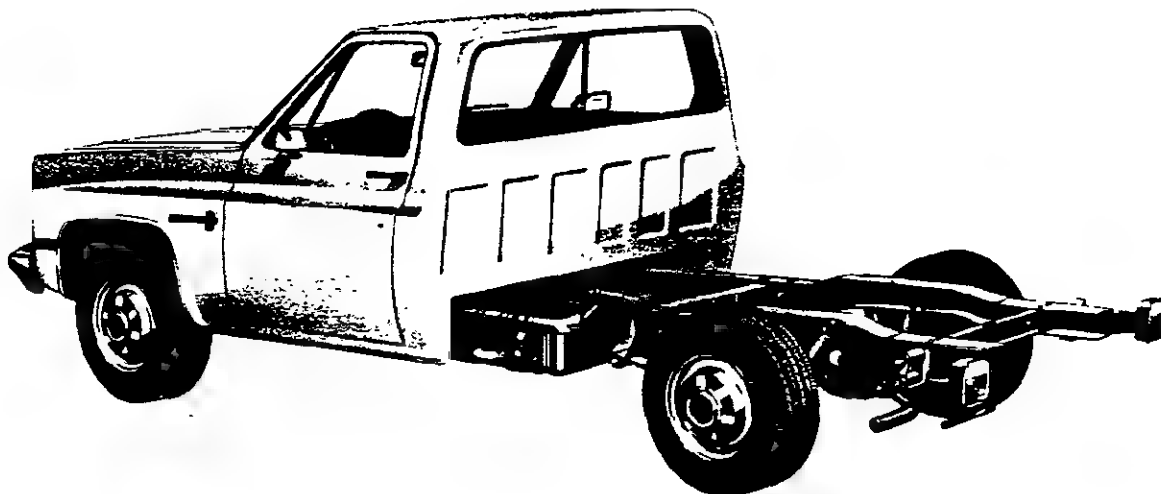

EXTERIOR

- **Bumper:** Front; chromed
- **Color:** See Interior and Exterior Color Selection Chart
- **Grille and Headlamp Bezels:** Molded plastic, painted argent; integral Chevrolet emblem/GMC letters at center of grille
- **Horn:** Single, electric, low-note
- **Hub Caps:** Bright metal with black trim (single rear wheel models only)
- **Keys:** Two-key system; with separate keys for ignition switch and door locks
- **Lights:**
 - Backup lamps: Two rear (integral with taillamps)
 - Clearance and identification lamps (K3 Series models only):
 - Five front (on roof)
 - Combination parking/direction/hazard: Two front
 - Combination tail/stop/direction/hazard: Two rear
 - Headlamps: Two, rectangular
 - License plate lamp: Single rear (integral with LH taillamp)
 - Side marker lamps with reflectors: Two front
- **Mirrors:** Models without C7C or C7E—RH and LH fixed arm with adjustable 5-7/16" wide x 4" high head; chrome finish. Models with C7C or C7E—RH and LH Below Eyeline type with adjustable 9" wide x 6 1/2" high head; painted finish
- **Moldings:** Bright; drip moldings over side doors; headlamp and grille outline moldings
- **Nameplates:** Bright "Custom Deluxe/Sierra" nameplates with series designation on front fenders near doors plus bright "3+3" nameplates on Crew Cab models or "BONUS CAB" nameplates on Bonus Cab models on cab rear quarters at styling crease line
- **Tools:** Mechanical jack and wheel wrench
- **Wheels:** Painted white
- **Windshield Wipers and Washers:** Electric, 2-speed wipers with black finish on exposed metal portions; wet-arm design demand-type washer system

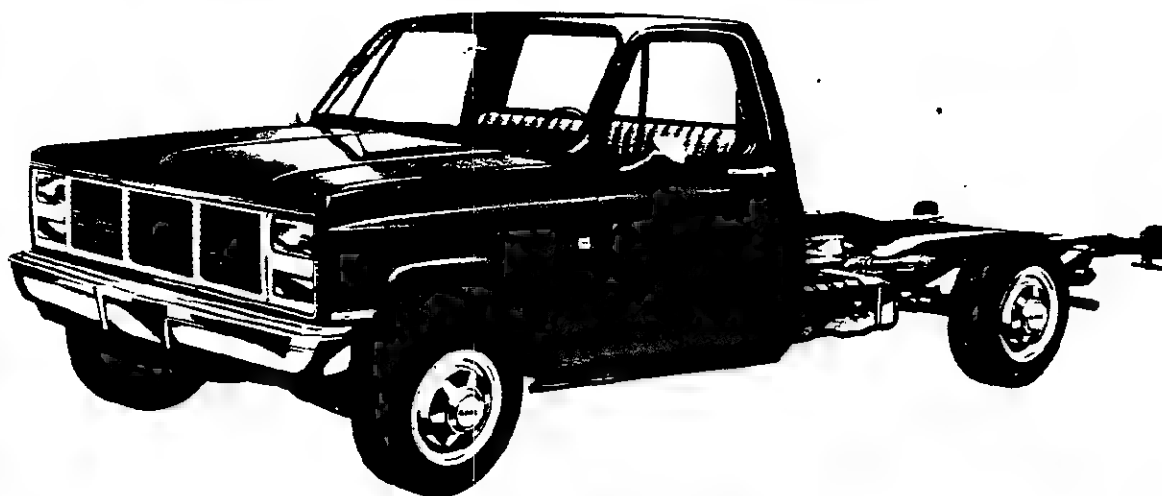

C/K CHASSIS-CAB

**CAB & BODY FEATURES
CHASSIS FEATURES
CAB CONSTRUCTION
CAB DIMENSIONS
COLOR & TRIM CHARTS
TWO-TONES**

NOTES

C-K H.D. CHASSIS-CAB

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1986 model motor vehicles

Description	Option Number	Factory D&H(a)	List Price	MSRP Suggested Retail Price◇
OTHER OPTIONS				
Lamps:				
Cargo Area:				
Without Z62 or YE9. Includes C91 Dome Lamp	UF2	N.A.	60.00	60.00
With Z62 or YE9	UF2	N.A.	34.00	34.00
Dome: Included when UF2 Lamp, Z62 or YE9 is specified. Includes door actuated switches and bright lamp bezels	C91	N.A.	26.00	26.00
Lighter, Cigarette: Included when Z62 or YE9 is specified	U37	N.A.	30.00	30.00
Mirrors, Exterior: LH and RH				
Below-Eye-Line Type: 9" x 6.5". Stainless Steel	D45	N.A.	33.00	33.00
Camper Type: Stainless steel. 7.5" x 10.5". Adjustable arm feature to provide field of vision for vehicles to 96" wide. Shipped loose for dealer installation	DF2	N.A.	44.00	44.00
Senior West Coast Type: Painted. Shipped loose for dealer installation	DG5	N.A.	15.00	15.00
Moldings: Guards, Door Edge				
Regular Cab only	B93	N.A.	17.00	17.00
Bonus Cab or Crew Cab only	B93	N.A.	22.00	22.00
Operating Convenience Package: Includes AU3 Power Door Locks and A31 Power Windows				
Regular Cab only	ZQ2	N.A.	325.00	325.00
Bonus and Crew Cab only	ZQ2	N.A.	488.00	488.00
Preliminary Price Information	B3W	N.A.	N.A.	N.A.
Radio Equipment:				
AM Radio	U63	N.A.	112.00	112.00
AM/FM Radio	U69	N.A.	171.00	171.00
AM/FM Stereo Radio	U58	N.A.	198.00	198.00
AM/FM Stereo Radio with Stereo Cassette Tape	UN3	N.A.	298.00	298.00
AM/FM Stereo Radio with Seek and Scan, Stereo Cassette Tape and Digital Clock. Electronically Tuned	UM6	N.A.	419.00	419.00
Windshield Antenna. Included with radio	U76	N.A.	32.00	32.00
Shield, Transfer Case: K3 Series only	NY7	N.A.	41.00	41.00
Speed Control, Electronic: Not available when MM4 4-Speed Transmission and LT9 5.7 Liter or LE8 7.4 Liter Engine are specified	K34	N.A.	195.00	195.00
Springs: Rear, Extra Capacity: Capacity 5000-lb each. Not available when Z81 Camper Special Chassis Equipment is specified	G52	N.A.	17.00	17.00
Stabilizer Bars: C3 Series only				
Front: 1" diameter. Not available when Z81 Camper Special Chassis Equipment is specified	F59	N.A.	38.00	38.00
Front, Heavy-Duty: 1.25" diameter. Standard on K3 Series. Included when Z81 Camper Special Chassis Equipment is specified	F58	N.A.	55.00	55.00
Steering:				
Power: Standard on K3 Series. Included when B3J Diesel Equipment is specified	N41	N.A.	260.00	260.00
Power Not Desired: Not available on K3 Series or when B3J Diesel Equipment is specified	N51	NO ADDITIONAL CHARGE		
Steering Wheel: Comfortilt	N33	N.A.	115.00	115.00
Tank, Fuel: Auxiliary: Approximately 20-gallon capacity. RH frame mounted.				
Without B3J Diesel Equipment	NL2	N.A.	260.00	260.00
With B3J Diesel Equipment	NL2	N.A.	272.00	272.00
Towing Device: Two front towing hooks.	V76	N.A.	36.00	36.00
Wheel Trim: Bright Metal Wheel Covers. C3 Series only	PO1	N.A.	49.00	49.00
Windows:				
Power: Included when ZQ2 Operating Convenience Package is specified				
Regular Cab only	A31	N.A.	190.00	190.00
Bonus and Crew Cab only	A31	N.A.	290.00	290.00
Sliding Rear: (Note: If A01 Tinted Glass is specified, sliding window will remain clear)	A28	N.A.	107.00	107.00
Windshield Wiper System: Intermittent	CD4	N.A.	55.00	55.00

(a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

◇ State and local taxes not included.

C-K H.D. CHASSIS-CAB

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1985 model motor vehicles

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price◇
OTHER OPTIONS				
Air Cleaner, Pre-Cleaner	K48	N.A.	42.00	42.00
Air Conditioning: All-Weather. Not available when V10 Cold-Climate Package is specified	C60	N.A.	678.00	678.00
Appearance, Deluxe Front: Includes dark argent grille with bright trim and dual rectangular headlamps. Included when YE9 is specified	V22	N.A.	109.00	109.00
Batteries: 12-Volt, 515 Cold Cranking Amps, Delco Freedom. Not available when B3J Diesel Equipment is specified.				
Auxiliary	TP2	N.A.	126.00	126.00
Heavy-Duty. Included when V10 Cold-Climate Package is specified.	UA1	N.A.	53.00	53.00
Bumper Equipment: Guards, Front Bumper. Chromed ..	V31	N.A.	41.00	41.00
Camper Special Chassis Equipment: Basic Camper Group Not available on C-K3 Bonus or Crew Cab. C31003 or C31403 includes rear stabilizer and F58 H.D. Front Stabilizer	Z81	N.A.	101.00	101.00
Carrier, Spare Tire and Wheel: Glide-Out. Available only when spare tire is specified	P11	N.A.	41.00	41.00
Clock: Quartz Electric. Not available when UM6 Radio is specified.				
Without YE9 Includes Z53 Voltmeter, Temperature and Oil Pressure Gages	U35	N.A.	79.00	79.00
With YE9	U35	N.A.	39.00	39.00
Cold-Climate Package: Not available when C60 Air Conditioning or B3J Diesel Equipment is specified. Includes special insulation, H. D. Heater and Defroster, engine block heater, anti-freeze protection to -32 degrees and UA1 H.D. Battery.				
Without YE9 or Z62	V10	N.A.	138.00	138.00
With YE9 or Z62	V10	N.A.	126.00	126.00
Cooling Systems: Recommended for heavy-duty trailing.				
Engine Oil. Not available when B3J Diesel Equipment is specified	KC4	N.A.	120.00	120.00
Radiator, Heavy Duty. Not available when B3J Diesel Equipment, C60 Air Conditioning or MX1 Automatic Transmission is specified	V01	N.A.	53.00	53.00
Radiator and Transmission Oil, Heavy-Duty. Available only when MX1 Automatic Transmission is specified. Not available when V01 H.D. Radiator is specified	V02	N.A.	59.00	59.00
Door Lock System, Power: Included when ZQ2 Operating Convenience Package is specified				
Regular Cab only	AU3	N.A.	135.00	135.00
Bonus and Crew Cab only	AU3	N.A.	198.00	198.00
Floor Covering: Mats, 2 Color-Keyed Front Floor. Removable. Available only when YE9 is specified	B32	N.A.	15.00	15.00
Gages: Voltmeter, Temperature and Oil Pressure. Included when YE9 or U35 Electric Clock is specified	Z53	N.A.	40.00	40.00
Generator: 94-Amp Delcorton. Included when LE8 7.4 Liter Engine and C60 Air Conditioning is specified. Also included on K3 Series when LE8 7.4 Liter Engine is specified	K22	N.A.	62.00	62.00
Glass: Tinted. All Windows.				
Regular Cab only	A01	N.A.	46.00	46.00
Bonus Cab or Crew Cab only	A01	N.A.	56.00	56.00
Headlamps: Halogen Hi-Beam. Available only when V22 Deluxe Front Appearance Package or YE9 is specified	TT5	N.A.	17.00	17.00
Heaters:				
Engine Block, 600 Watts, 120 Volts. Not available when B3J Diesel Equipment is specified. Included when V10 Cold-Climate Package is specified.	K05	N.A.	31.00	31.00
Heavy Duty, Front. Available only when B3J Diesel Equipment is specified. Not available when C60 Air Conditioning is specified	C42	N.A.	43.00	43.00

(a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

◇ State and local taxes not included.

C-K H.D. CHASSIS-CAB

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1986 model motor vehicles

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price ^o
Emission Systems: Dealer Note - One of the following emission options must be specified.				
California Emission Requirements: Includes all testing, equipment and/or certification necessary for registration in the state of California. (See Power Teams Chart for availability and complete specifications)				
Without LT9 5.7 Liter or LE8 7.4 Liter Engine	YF5	N.A.	235.00	235.00
With LT9 5.7 Liter or LE8 7.4 Liter Engine	YF5	N.A.	(-235.00)	(-235.00)
High Altitude Emission Equipment: Available only when B3J Diesel Equipment is specified. Not available when YF5 California Emissions is specified.				
	NA6	NO ADDITIONAL CHARGE		
Standard Emission Equipment: Not available when NA6 High Altitude or YF5 California Emissions is specified.				
	NA5	NO ADDITIONAL CHARGE		
Engines: (See Power Teams Chart for availability and complete specifications)				
Gasoline.				
5.7 Liter (350 Cu. In.) 4 BBL V8	LT9	NO ADDITIONAL CHARGE		
7.4 Liter (454 Cu. In.) 4 BBL V8.				
C3 Series. Available only when N41 Power Steering and UA1 H.D. Battery is specified	LE8	N.A.	365.00	365.00
K3 Series. Available only when UA1 H.D. Battery is specified. Includes K22 94-Amp Generator	LE8	N.A.	365.00	365.00
Diesel.				
6.2 Liter (379 Cu. In.) H.D. V8 Diesel. Available only when B3J Diesel Equipment is specified	LL4	NO ADDITIONAL CHARGE		
Transmissions:				
3-Speed Automatic. Available only when V02 H.D. Radiator and Transmission Oil Cooler is specified.	MX1	N.A.	535.00	535.00
4-Speed Manual	MM4	NO ADDITIONAL CHARGE		
Axles, Rear: (See Power Teams Chart for option number selection availability and complete specifications)				
Optional Ratio.		N.A.	36.00	36.00
Locking Differential.	G80	N.A.	238.00	238.00
Tires: (See Tire Charts for Tire Availability) All rim sizes are 6.00"				
TUBELESS				
LT215/85R16-D Highway Steel Belted Radial Ply Blackwall (Maximum Capacity each. Front 2315 lbs) (Dual Rear 2105-lbs)				
Front. (Standard)	XYK	NO ADDITIONAL CHARGE		
Rear. (Standard)	YYK	NO ADDITIONAL CHARGE		
Spare	ZYK	.05	337.00	337.05
LT215/85R16-D On-Off Road Steel Belted Radial Ply Blackwall (Maximum Capacity each. Front 2315-lbs) (Dual Rear 2105-lbs)				
Front. K3 Series only.	XYL	.48	54.00	54.48
Rear	YYL	.92	108.00	108.92
Spare	ZYL	.28	364.00	364.28
TUBE-TYPE				
7.50-16/D Highway Nylon Ply Blackwall (Maximum Capacity each. Front 2440-lbs) (Dual Rear 2140-lbs)				
Front	XPF	(-.10)	(-222.00)	(-222.10)
Rear	YPF	(-.20)	(-444.00)	(-444.20)
Spare	ZPF	N.C.	226.00	226.00
7.50-16/D On-Off Road Nylon Ply Blackwall (Maximum Capacity each. Front 2440-lbs) (Dual Rear 2140-lbs)				
Front. K3 Series only.	XPG	(-.10)	(-164.00)	(-164.10)
Rear	YPG	(-.20)	(-328.00)	(-328.20)
Spare	ZPG	N.C.	255.00	255.00

- (a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
^o State and local taxes not included.

C-K H.D. CHASSIS-CAB

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1986 model motor vehicles

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price◇
Scottsdale/High Sierra: (See Interior and Exterior Color Selection Charts) Available only when deluxe cloth seat or custom vinyl seat is specified on Regular Cab only. Includes bright rear window and windshield moldings, bright side marker lamp bezels, nameplates on front fenders and instrument panel, C91 Dome Lamp, color-keyed vinyl coated floor mats, cab back insulation, U37 Cigarette Lighter, dual horns and special insulation.				
Regular Cab only. Also includes plastic door trim panels	Z62	N.A.	250.00	250.00
Bonus Cab only. Also includes headliner with trim moldings	Z62	N.A.	212.00	212.00
Crew Cab only. Also includes headliner with trim moldings	Z62	N.A.	221.00	221.00
Silverado/Sierra Classic: (See Interior and Exterior Color Selection Charts) Available only when custom cloth seat or custom vinyl seat is specified. Includes bright side marker lamp bezels, fender nameplates, bright windshield, rear window and cab back panel applique moldings, color-keyed carpeting, plastic door trim panels with storage pockets and bright brushed-finish accents, Z53 Voltmeter, Temperature and Oil Pressure Gages, nameplate on instrument panel, V22 Deluxe Front Appearance, visor vanity mirror, U37 Cigarette Lighter, custom steering wheel, headliner with trim moldings, cab back insulation, C91 Dome Lamp with bright bezel, dual horns and special insulation.				
Regular Cab only	YE9	N.A.	671.00	671.00
Bonus Cab only	YE9	N.A.	749.00	749.00
Crew Cab only. Also includes rear seat carpeting	YE9	N.A.	832.00	832.00
Seat Trim: (See Interior and Exterior Color Selection Chart for availability and ordering information).				
V**1 Vinyl Bench		NO ADDITIONAL CHARGE		
C**1 Deluxe Cloth Bench. Regular Cab only. Not available when YE9 is specified				
Without Z62		N.A.	67.00	67.00
With Z62		N.A.	17.00	17.00
L**1 Custom Cloth Bench.				
Regular Cab only. Available only when YE9 is specified		NO ADDITIONAL CHARGE		
Bonus Cab only. Available only when Z62 or YE9 is specified				
With Z62		N.A.	50.00	50.00
With YE9		NO ADDITIONAL CHARGE		
Crew Cab only. Available only when Z62 or YE9 is specified.				
With Z62		N.A.	100.00	100.00
With YE9		NO ADDITIONAL CHARGE		
X**1 Custom Vinyl Bench.				
Regular Cab only.				
Without Z62 or YE9		N.A.	50.00	50.00
With Z62 or YE9		NO ADDITIONAL CHARGE		
Bonus Cab only Available only when Z62 or YE9 is specified				
With Z62		N.A.	50.00	50.00
With YE9		NO ADDITIONAL CHARGE		
Crew Cab only. Available only when Z62 or YE9 is specified.				
With Z62		N.A.	100.00	100.00
With YE9		NO ADDITIONAL CHARGE		
Paints, Exterior: (See Interior and Exterior Color Selection Chart for ordering information and paint application).				
Solid	ZY1	NO ADDITIONAL CHARGE		
Conventional Two-Tone.				
Regular Cab only.				
Without YE9. Includes cab back panel applique moldings	ZY2	N.A.	72.00	72.00
With YE9	ZY2	N.A.	43.00	43.00
Bonus Cab or Crew Cab only.				
Without YE9. Includes cab back panel applique moldings	ZY2	N.A.	89.00	89.00
With YE9	ZY2	N.A.	60.00	60.00

(a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

◇ State and local taxes not included.

C-K H.D. CHASSIS-CAB 2-WHEEL DRIVE (10,500-lb GVW) 4-WHEEL DRIVE (11,000-LB GVW)

1986 VEHICLES WITH STANDARD EQUIPMENT

Prices shown are effective with initial shipments of 1986 model motor vehicles

Description	Model Number	Body Code	Wheel Base	Factory D&H(a)	List Price	Mfr's Suggested Retail Price*	Group Number
<i>(All Series have Regular Cab unless otherwise indicated)</i>							
◆ 8 Cylinder 5.7 Liter (350 Cu. In.) 4 BBL V8 Gasoline Engine-Engine Ordering Code LT9							
C30 Series 2-Wheel Drive							
H.D. Chassis-Cab (56" Cab-to-Axle) Bonus Cab	CC30943	ZW9 & C7C & YG4	164.5"	.30	12816.00	12816.30	17
Crew Cab	CC30943	ZW9 & AS3 & C7C	164.5"	.30	13167.00	13167.30	17
H.D. Chassis-Cab (60" Cab-to-Axle) ..	CC31003	ZW9 & C7C	135.5"	.30	11875.00	11875.30	17
H.D. Chassis-Cab (84" Cab-to-Axle) ..	CC31403	ZW9 & C7C	159.5"	.30	11961.00	11961.30	17
K30 Series 4-Wheel Drive							
H.D. Chassis-Cab (56" Cab-to-Axle) Bonus Cab	CK30943	ZW9 & C7E & YG4	164.5"	.30	14744.00	14744.30	17
Crew Cab	CK30943	ZW9 & AS3 & C7E	164.5"	.30	15098.00	15098.30	17
H.D. Chassis-Cab (60" Cab-to-Axle) ..	CK31003	ZW9 & C7E	135.5"	.30	13854.00	13854.30	17
H.D. Chassis-Cab (84" Cab-to-Axle) ..	CK31403	ZW9 & C7E	159.5"	.30	13942.00	13942.30	17
◆ 8-Cylinder 6.2 Liter (379 Cu. In.) H.D. Diesel V8 Engine-Engine Ordering Code LL4							
C30 Series 2-Wheel Drive							
H.D. Chassis-Cab (56" Cab-to-Axle) Bonus Cab	CC30943	ZW9 & C7C & YG4 & B3J	164.5"	.30	14610.00	14610.30	17
Crew Cab	CC30943	ZW9 & AS3 & C7C & B3J	164.5"	.30	14951.00	14951.30	17
H.D. Chassis-Cab (60" Cab-to-Axle) ..	CC31003	ZW9 & C7C & B3J	135.5"	.30	13669.00	13669.30	17
H.D. Chassis-Cab (84" Cab-to-Axle) ..	CC31403	ZW9 & C7C & B3J	159.5"	.30	13755.00	13755.30	17
K30 Series 4-Wheel Drive							
H.D. Chassis-Cab (56" Cab-to-Axle) Bonus Cab	CK30943	ZW9 & C7E & YG4 & B3J	164.5"	.30	16249.00	16249.30	17
Crew Cab	CK30943	ZW9 & AS3 & C7E & B3J	164.5"	.30	16602.00	16602.30	17
H.D. Chassis-Cab (60" Cab-to-Axle) ..	CK31003	ZW9 & C7E & B3J	135.5"	.30	15358.00	15358.30	17
H.D. Chassis-Cab (84" Cab-to-Axle) ..	CK31403	ZW9 & C7E & B3J	159.5"	.30	15445.00	15445.30	17

★ Manufacturer's Suggested Retail Prices do not include applicable destination charges, state and local taxes, license fees, optional equipment or special items or services.

◆ Refer to Dealer Order Guide for California Requirements.

(a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

Prices shown are effective with initial shipments of 1986 model motor vehicles

(a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

C-K CHASSIS-CAB

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1985 model motor vehicles

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price◇
OTHER OPTIONS				
Radio Equipment:				
AM Radio	U63	N.A.	112.00	112.00
AM/FM Radio	U69	N.A.	171.00	171.00
AM/FM Stereo Radio	U58	N.A.	198.00	198.00
AM/FM Stereo Radio with Stereo Cassette Tape	UN3	N.A.	298.00	298.00
AM/FM Stereo Radio with Seek and Scan, Stereo Cassette Tape and Digital Clock. Electronically Tuned.	UM6	N.A.	419.00	419.00
Windshield Antenna Included with radio	U76	N.A.	32.00	32.00
Shield, Transfer Case: K3 Series only.	NY7	N.A.	41.00	41.00
Speed Control, Electronic: Not available with 1 25 4 8 Liter Engine. Also not available when MM4 4-Speed Transmission and LT9 5.7 Liter or LE8 7.4 Liter Engine is specified				
	K34	N.A.	195.00	195.00
Springs:				
<i>Rear, Extra Capacity.</i> Capacity 5000-lb each. C-K3 Series except C-K30903.				
C30943. Available only when R05 Dual Rear Wheels and XPF 7.50-16/D or XYK LT215/85R16-D Tires are specified	G52	N.A.	17.00	17.00
C31003 or C31403 only. Available only when R05 Dual Rear Wheels and XPF 7.50-16/D or XYK LT215/85R16-D Tires are specified	G52	N.A.	114.00	114.00
K30943. Available only when R05 Dual Rear Wheels are specified	G52	N.A.	17.00	17.00
K31003 only. Available only when R05 Dual Rear Wheels are specified. Not available when Z81 Camper Special Chassis Equipment is specified	G52	N.A.	114.00	114.00
K31403 only. Not available when Z81 Camper Special Chassis Equipment is specified	G52	N.A.	17.00	17.00
<i>Rear, Main and Auxiliary.</i> Capacity 3750-lb each. C-K3 Series only Standard on K31403.				
C3 Series only. Included when Z81 Camper Special Chassis Equipment and R05 Dual Rear Wheels are specified	G60	N.A.	97.00	97.00
C-K3 Bonus and Crew Cab. Included when R05 Dual Rear Wheels are specified	G60	N.A.	97.00	97.00
K31003 only. Included when Z81 Camper Special Chassis Equipment is specified	G60	N.A.	97.00	97.00
Stabilizer Bars:				
<i>Front.</i> 1" diameter. C3 Series only. Not available when Z81 Camper Special Chassis Equipment is specified				
	F59	N.A.	38.00	38.00
<i>Front, Heavy-Duty.</i> 1.25" diameter. C2-3 Series only. Standard on K3 Series. Included when Z81 Camper Special Chassis Equipment is specified.				
C2 Series only	F58	N.A.	17.00	17.00
C3 Series only	F58	N.A.	55.00	55.00
Steering:				
<i>Power.</i> Standard on K3 Series. Included when B3J Diesel Equipment is specified				
	N41	N.A.	260.00	260.00
<i>Power Not Desired.</i> Not available on K3 Series	N51	NO ADDITIONAL CHARGE		
Steering Wheel: Comfortilt	N33	N.A.	115.00	115.00
Tank, Fuel: Auxiliary. Provides two fuel tanks of approximately 20-gallon capacity per tank. RH frame mounted.				
Without B3J Diesel Equipment	NL2	N.A.	260.00	260.00
With B3J Diesel Equipment	NL2	N.A.	272.00	272.00
Towing Device: Two front towing hooks.	V76	N.A.	36.00	36.00
Wheel Trim: Bright Metal.				
<i>Wheel Covers.</i> Not available on K3 Series. Available only when R05 Dual Rear Wheels and 7.50-16 Tires are specified on C3 Series				
	P01	N.A.	49.00	49.00
<i>Wheel Covers, Special.</i> C2,C-K3 Series only	PA1	N.A.	118.00	118.00

(a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
 ◇ State and local taxes not included.

C-K CHASSIS-CAB

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1986 model motor vehicles

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price ^Q
OTHER OPTIONS				
Door Lock System, Power: Included when ZQ2 Operating Convenience Package is specified				
Regular Cab only	AU3	N.A.	135.00	135.00
Bonus and Crew Cab only	AU3	N.A.	198.00	198.00
Floor Covering: Mats, 2 Color-Keyed Front Floor. Removable Available only when YE9 is specified				
	B32	N.A.	15.00	15.00
Gages: Voltmeter, Temperature and Oil Pressure. Included when YE9 or U35 Electric Quartz Clock is specified.				
	Z53	N.A.	40.00	40.00
Generators:				
66-Amp Delcotron. Standard on K3 Series except when LE8 7.4 Liter Engine. is specified Included when R05 Dual Rear Wheels, C60 Air Conditioning, B3J Diesel Equipment or V10 Cold-Climate Package is specified				
	K81	N.A.	62.00	62.00
94-Amp Delcotron. Included when LE8 7.4 Liter Engine and C60 Air Conditioning or R05 Dual Rear Wheels is specified Also included on K3 Series when LE8 7.4 Liter Engine is specified				
	K22	N.A.	62.00	62.00
Glass: Tinted. All Windows.				
Regular Cab only	A01	N.A.	46.00	46.00
Bonus or Crew Cab only	A01	N.A.	56.00	56.00
Headlamps: Halogen Hi-Beam. Available only when V22 Deluxe Front Appearance Package or YE9 is specified				
	TT5	N.A.	17.00	17.00
Hastars:				
Engine Block. 600 Watts, 120 Volts. Not available when B3J Diesel Equipment is specified. Included when V10 Cold-Climate Package is specified				
	K05	N.A.	31.00	31.00
Heavy Duty, Front Available only when B3J Diesel Equipment is specified. Not available when C60 Air Conditioning is specified				
	C42	N.A.	43.00	43.00
Lamps:				
Cargo Area				
Without Z62 or YE9. Includes C91 Dome Lamp	UF2	N.A.	60.00	60.00
With Z62 or YE9	UF2	N.A.	34.00	34.00
Dome. Included when UF2 Lamp, Z62 or YE9 is specified. Includes door actuated switches and bright lamp bezels				
	C91	N.A.	26.00	26.00
Roof Marker. Five. Standard on K3 Series only. Included when R05 Dual Rear Wheels are specified. Without R05 Dual Rear Wheels, available only when NA5 Standard or NA6 High Altitude Emission Equipment is specified				
	U01	N.A.	50.00	50.00
Lighter, Cigarette: Included when Z62 or YE9 is specified				
	U37	N.A.	30.00	30.00
Mirrors, Exterior: LH and RH				
Below-Eye-Line Type. 9" x 6.5"				
Painted	D44	N.A.	50.00	50.00
Stainless Steel	D45	N.A.	83.00	83.00
Camper Type. Stainless steel 7.5" x 10.5". Adjustable arm feature to provide field of vision for vehicles to 96' wide. Shipped loose for dealer installation				
	DF2	N.A.	94.00	94.00
Senior West Coast Type. Painted C-K3 Series only. Shipped loose for dealer installation				
	DG5	N.A.	65.00	65.00
Moldings: Guards, Door Edge				
Regular Cab only	B93	N.A.	17.00	17.00
Bonus Cab or Crew Cab only	B93	N.A.	22.00	22.00
Operating Convenience Package: Includes AU3 Power Door Locks and A31 Power Windows				
Regular Cab only	ZQ2	N.A.	325.00	325.00
Bonus and Crew Cab only	ZQ2	N.A.	488.00	488.00
Preliminary Price Information	B3W	N.A.	N.A.	N.A.

(a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

^Q State and local taxes not included.

C-K CHASSIS-CAB

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1986 model motor vehicles.

Description	Option Number	Factory D&H(s)	List Price	Mfr's Suggested Retail Price◇
OTHER OPTIONS				
Air Cleaner, Pre-Cleaner: Not available when L25 4.8 Liter Engine is specified	K46	N.A.	42.00	42.00
Air Conditioning: <i>All-Weather.</i> Not available when V10 Cold-Climate Package is specified.				
Without B3J Diesel Equipment, LE8 7.4 Liter Engine or K3 Series. Includes K81 66-Amp Generator	C60	N.A.	740.00	740.00
C-2, 3 Series	C60	N.A.	740.00	740.00
With LE8 7.4 Liter Engine. Includes K22 94-Amp Generator	C60	N.A.	678.00	678.00
With B3J Diesel Equipment or K3 Series	C60	N.A.		
Appearance, Deluxe Front: Includes dark argent grille with bright trim and dual rectangular headlamps. Included when YE9 is specified	V22	N.A.	109.00	109.00
Batteries: 12-Volt. 515 Cold Cranking Amps Delco Freedom. Not available when B3J Diesel Equipment is specified.				
<i>Auxiliary.</i>	TP2	N.A.	126.00	126.00
<i>Heavy-Duty.</i> Included when V10 Cold-Climate Package is specified	UA1	N.A.	53.00	53.00
Bumper Equipment: <i>Guards, Front Bumper.</i> Chromed	V31	N.A.	41.00	41.00
Camper Special Chassis Equipment: <i>Basic Camper Group.</i> Not available on C-K30903, C-K30943 or when L25 4.8 Liter Engine is specified.				
C31003 or C31403 only. Available only when R05 Dual Rear Wheels and 2060-lb or larger capacity front tires are specified. Includes G60 Main and Auxiliary Rear Springs, rear stabilizer and F58 H.D. Front Stabilizer	Z81	N.A.	198.00	198.00
K31003 only. Available only when R05 Dual Rear Wheels are specified. Includes G60 Main and Auxiliary Rear Springs	Z81	N.A.	102.00	102.00
K31403 only	Z81	N.A.	5.00	5.00
Carrier, Spare Tire and Wheel: <i>Glide-Out.</i> Available only when spare tire is specified.	P11	N.A.	41.00	41.00
Clock: <i>Quartz Electric.</i> Not available when UM6 Radio is specified.				
Without YE9. Includes Z53 Voltmeter, Temperature and Oil Pressure Gages	U35	N.A.	79.00	79.00
With YE9	U35	N.A.	39.00	39.00
Cold-Climate Package: Not available when C60 Air Conditioning or B3J Diesel Equipment is specified. Includes special insulation, special heater and defroster, K05 Engine Block Heater, anti-freeze protection to -32 degrees and UA1 H.D. Battery.				
Without YE9 or Z52.				
C2 Series only. Also includes K81 66-Amp Generator	V10	N.A.	200.00	200.00
C3 Series				
Without R05 Dual Rear Wheels. Also includes K81 66-Amp Generator	V10	N.A.	200.00	200.00
With R05 Dual Rear Wheels	V10	N.A.	138.00	138.00
With YE9 or Z62				
C2 Series only. Also includes K81 66-Amp Generator	V10	N.A.	188.00	188.00
C3 Series				
Without R05 Dual Rear Wheels. Also includes K81 66-Amp Generator	V10	N.A.	188.00	188.00
With R05 Dual Rear Wheels	V10	N.A.	126.00	126.00
Cooling Systems: <i>Recommended for heavy-duty trailering.</i>				
Engine Oil: Not available when L25 4.8 Liter Engine or B3J Diesel Equipment is specified.	KC4	N.A.	120.00	120.00
Radiator, Heavy-Duty. Not available when C60 Air Conditioning, B3J Diesel Equipment, MX1 or MX0 Automatic Transmission is specified.	V01	N.A.	53.00	53.00
Radiator and Transmission Oil, Heavy-Duty. Available only when MX1 or MX0 Automatic Transmission is specified. Not available when L25 4.8 Liter Engine or V01 H.D. Radiator is specified	V02	N.A.	59.00	59.00

- (a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon
 ◇ State and local taxes not included.

C-K CHASSIS-CAB

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1986 model motor vehicles

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price◇
Tires: (Continued)				
LT215/85R16-D Highway Steel Belted Radial Ply Blackwall (Maximum Capacity Each. Front 2315-lbs) (Dual Rear 2105-lbs)				
Front				
C-K3 Series except K31403	XYK	(-1.66)	(-30.00)	(-31.66)
K31403 only (Standard)	XYK	NO ADDITIONAL CHARGE		
Rear				
C-K3 Series except K31403	YYK	(-1.80)	558.00	556.20
K31403 only (Standard)	YYK	NO ADDITIONAL CHARGE		
Spare	ZYK	.05	337.00	337.05
LT215/85R16-D On-Off Road Steel Belted Radial Ply Blackwall (Maximum Capacity Each. Front 2315-lbs) (Dual Rear 2105-lbs)				
Front				
K30943 or K31003 only	XYL	(-1.44)	24.00	22.56
K31403 only	XYL	.46	54.00	54.46
Rear				
K30943, K31003 or C3 Series only	YYL	(-.88)	666.00	665.12
K31403 only	YYL	.92	108.00	108.92
Spare	ZYL	.28	364.00	364.28
TUBE-TYPE				
7.50-16/C Highway Nylon Ply Blackwall (Maximum Capacity Each. Front 2060-lbs) (Dual Rear 1815-lbs)				
Front	XPB	(-1.76)	(-284.00)	(-285.76)
Rear, Regular Cab only	YPB	(-2.00)	50.00	48.00
Spare, Regular Cab only	ZPB	N.C.	210.00	210.00
7.50-16/C On-Off Road Nylon Ply Blackwall (Maximum Capacity Each Dual Rear 1815-lbs)				
Rear, C31003 or C31403 only	YPC	(-2.00)	162.00	160.00
Spare	ZPC	N.C.	238.00	238.00
7.50-16/D Highway Nylon Ply Blackwall (Maximum Capacity Each. Front 2440-lbs) (Dual Rear 2140-lbs)				
Front				
C-K3 Series except K31403	XPF	(-1.76)	(-252.00)	(-253.76)
K31403 only	XPF	(-1.10)	(-222.00)	(-222.10)
Rear				
C-K3 Series except K31403	YPF	(-2.00)	114.00	112.00
K31403 only	YPF	(-1.20)	(-444.00)	(-444.20)
Spare	ZPF	N.C.	226.00	226.00
7.50-16/D On-Off Road Nylon Ply Blackwall (Maximum Capacity Each. Front 2440-lbs) (Dual Rear 2140-lbs)				
Front				
K3 Series except K31403	XPG	(-1.76)	(-194.00)	(-195.76)
K31403 only	XPG	(-1.10)	(-164.00)	(-164.10)
Rear				
C-K3 Series except K31403	YPG	(-2.00)	230.00	228.00
K31403 only	YPG	(-1.20)	(-328.00)	(-328.20)
Spare	ZPG	N.C.	255.00	255.00

(a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

◇ State and local taxes not included.

C-K CHASSIS-CAB

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1986 model motor vehicles

Description	Option Number	Factory D&H(s)	List Price	Mfr's Suggested Retail Price ^Q
Emission Systems: Dealer Note — One of the following emission options must be specified.				
<i>California Emission Requirements:</i> Includes all testing, equipment and/or certification necessary for registration in the state of California. Not available when L25 4.8 Liter Engine is specified (See Power Teams Chart for availability and complete specifications)				
Without LT9 5.7 Liter or LE8 7.4 Liter Engine	YF5	N.A.	235.00	235.00
With LT9 5.7 Liter or LE8 7.4 Liter Engine	YF5	N.A.	(-235.00)	(-235.00)
<i>High Altitude Emission Equipment.</i> Available only when B3J Diesel Equipment is specified. Not available when NA5 Standard or YF5 California Emissions are specified				
Standard Emission Equipment. Not available when NA6 High Altitude or YF5 California Emissions is specified.	NA6	NO ADDITIONAL CHARGE		
	NA5	NO ADDITIONAL CHARGE		
Engines: (See Power Teams Chart for availability and complete specifications)				
<i>Gasoline.</i>				
4.8 Liter (292 Cu. In.) 1 BBL L6	L25	NO ADDITIONAL CHARGE		
5.7 Liter (350 Cu. In.) 4 BBL V8.	LT9	N.A.	670.00	670.00
7.4 Liter (454 Cu. In.) 4 BBL V8. Available only when UA1 H.D. Battery is specified. C2-3 Series also available only when N41 Power Steering is specified. K3 Series also includes K22 94-Amp Generator	LE8	N.A.	865.00	865.00
<i>Diesel.</i>				
6.2 Liter (379 Cu. In.) H.D. V8 Diesel. Available only when B3J Diesel Equipment is specified	LL4	NO ADDITIONAL CHARGE		
Transmissions:				
3-Speed Automatic. Not available when L25 4.8 Liter Engine is specified on C2 Series	MX1	N.A.	535.00	535.00
4-Speed Manual	MM4	NO ADDITIONAL CHARGE		
Axles, Rear: (See Power Teams Chart for option number selection availability and complete specifications)				
Optional Ratio	...	N.A.	36.00	36.00
Locking Differential	G80	N.A.	238.00	238.00
Tires: (See Tire Charts for Tire Availability)				
All rim sizes are 6.50" on C2 Series and C-K3 Series without R05 Dual Rear Wheels.				
All rim sizes are 6.00" on C-K3 Series with R05 Dual Rear Wheels				
Dealer Note: When dual rear tires are specified, R05 Dual Rear Wheels will be applied to the order.				
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTED ON THE INVOICE SEPARATELY.				
For complete specifications and ordering information, see "OTHER OPTIONS" Section.				
TUBELESS				
LT235/85R16-D Highway Steel Belted Radial Ply Blackwall (Maximum Capacity 2623-lbs)	XYM	NO ADDITIONAL CHARGE		
Front. C2 or C-K3 Series except K31403 (Standard)				
LT235/85R16-E Highway Steel Belted Radial Ply Blackwall (Maximum Capacity Each 3042-lbs)	XYN	.24	32.00	32.24
Front. C2 or C-K3 Series except K31403				
Rear. C2 or C-K3 Series except K31403. (Standard)				
Spare	YYN	NO ADDITIONAL CHARGE		
LT235/85R16-E On-Off Road Steel Belted Radial Ply Blackwall (Maximum Capacity Each 3042-lbs)	ZYN	1.00	368.00	369.00
Front.	XYT	.76	86.00	86.76
K3 Series only except K31403				
Rear.	YYT	.52	54.00	54.52
C2 or K-3 Series except K31403				
Spare	ZYT	1.26	395.00	396.26
LT215/85R16-C Highway Steel Belted Radial Ply Blackwall (Maximum Capacity Each. Front 1940-lbs) (Dual Rear 1764-lbs)	XYJ	(-1.76)	(-62.00)	(-63.76)
C3 Series only				
Front	YYJ	(-2.00)	494.00	492.00
Rear. C3 Regular Cab only	ZYJ	N.C.	321.00	321.00
Spare. C3 Regular Cab only				

- (a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
 Q State and local taxes not included.

C-K CHASSIS-CAB

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1986 model motor vehicles

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price
Scottsdale/High Sierra: (See Interior and Exterior Color Selection Charts) Available only when deluxe cloth seat or custom vinyl seat is specified on Regular Cab. Includes bright rear window and windshield moldings, bright side marker lamp bezels, nameplates on front fenders and instrument panel, color-keyed vinyl coated floor mats, cab back insulation, C91 Dome Lamp, U37 Cigarette Lighter, dual horns and special insulation.				
Regular Cab only. Also includes plastic door trim panels	Z62	N.A.	250.00	250.00
Bonus Cab only. Also includes headliner with trim moldings	Z62	N.A.	212.00	212.00
Crew Cab only. Also includes headliner with trim moldings	Z62	N.A.	221.00	221.00
Silverado/Sierra Classic: (See Interior and Exterior Color Selection Charts) Available only when custom cloth seat or custom vinyl seat is specified. Includes bright side marker lamp bezels, fender nameplates, bright windshield, rear window and cab back panel applique moldings, color-keyed carpeting, plastic door trim panels with storage pockets and bright brushed-finish accents, Z53 Voltmeter, Temperature and Oil Pressure Gages, nameplate on instrument panel, V22 Deluxe Front Appearance, visor mirror, U37 Cigarette Lighter, custom steering wheel, headliner with trim moldings, C91 Dome Lamp with bright bezel, dual horns and special insulation				
Regular Cab only	YE9	N.A.	671.00	671.00
Bonus Cab only	YE9	N.A.	749.00	749.00
Crew Cab only. Also includes rear seat carpeting	YE9	N.A.	832.00	832.00
Seat Trim: (See Interior and Exterior Color Selection Chart for availability and ordering information).				
V**1 Vinyl Bench	...	NO ADDITIONAL CHARGE		
C**1 Deluxe Cloth Bench. Regular Cab only. Not available when YE9 is specified	...			
Without Z62	...	N.A.	87.00	87.00
With Z62	...	N.A.	17.00	17.00
L**1 Custom Cloth Bench.	...			
Regular Cab only. Available only when YE9 is specified	...	NO ADDITIONAL CHARGE		
Bonus Cab only. Available only when Z62 or YE9 is specified.	...			
With Z62	...	N.A.	50.00	50.00
With YE9	...	NO ADDITIONAL CHARGE		
Crew Cab only. Available only when Z62 or YE9 is specified	...			
With Z62	...	N.A.	100.00	100.00
With YE9	...	NO ADDITIONAL CHARGE		
X**1 Custom Vinyl Bench.	...			
Regular Cab only.	...			
Without Z62 or YE9	...	N.A.	50.00	50.00
With Z62 or YE9	...	NO ADDITIONAL CHARGE		
Bonus Cab only. Available only when Z62 or YE9 is specified.	...			
With Z62	...	N.A.	50.00	50.00
With YE9	...	NO ADDITIONAL CHARGE		
Crew Cab only. Available only when Z62 or YE9 is specified.	...			
With Z62	...	N.A.	100.00	100.00
With YE9	...	NO ADDITIONAL CHARGE		
Paints, Exterior: (See Interior and Exterior Color Selection Chart for ordering information and paint application).				
Solid	ZY1	NO ADDITIONAL CHARGE		
Conventional Two-Tone.				
Regular Cab only.	...			
Without YE9. Includes cab back panel applique moldings	ZY2	N.A.	72.00	72.00
With YE9	ZY2	N.A.	43.00	43.00
Bonus Cab or Crew Cab only.	...			
Without YE9. Includes cab back panel applique moldings	ZY2	N.A.	89.00	89.00
With YE9	ZY2	N.A.	60.00	60.00

(a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

^o State and local taxes not included.

C-K CHASSIS-CAB

2-WHEEL DRIVE (8600-lb - 10,000-lb GVW)

4-WHEEL DRIVE (8600-lb - 10,000-lb GVW)

1986 VEHICLES WITH STANDARD EQUIPMENT*

Prices shown are effective with initial shipments of 1986 model motor vehicles

Description	Model Number	Body Code	Wheel Base	Factory D&H(a)	List Price	Mfr's Suggested Retail Price†	Group Number
(All Series have Regular Cab unless otherwise indicated)							
◆ 6-Cylinder 4.8 Liter (292 Cu. In.) 1 BBL L6 Gasoline Engine-Engine Ordering Code L25							
C20 Series 2-Wheel Drive							
Chassis-Cab							
(56" Cab-to-Axle) ..	CC20903	ZW9	131.5"	3.76	9663.00	9666.76	17
C30 Series 2-Wheel Drive							
Chassis-Cab							
(56" Cab-to-Axle)							
Regular Cab	CC30903	ZW9	131.5"	3.76	9839.00	9842.76	17
Bonus Cab	CC30943	ZW9 & YG4	164.5"	3.76	10897.00	10900.76	17
Crew Cab	CC30943	ZW9 & AS3	164.5"	3.76	11249.00	11252.76	17
Chassis-Cab							
(60" Cab-to-Axle) ..	CC31003	ZW9	135.5"	3.76	9958.00	9961.76	17
Chassis-Cab							
(84" Cab-to-Axle) ..	CC31403	ZW9	159.5"	3.76	10044.00	10047.76	17
K30 Series 4-Wheel Drive							
Chassis-Cab							
(56" Cab-to-Axle)							
Regular Cab	CK30903	ZW9	131.5"	3.76	12605.00	12608.76	17
Bonus Cab	CK30943	ZW9 & YG4	164.5"	3.76	13544.00	13547.76	17
Crew Cab	CK30943	ZW9 & AS3	164.5"	3.76	13398.00	13901.76	17
Chassis-Cab							
(60" Cab-to-Axle) ..	CK31003	ZW9	135.5"	3.76	12723.00	12726.76	17
Chassis-Cab							
(84" Cab-to-Axle)	CK31403	ZW9	159.5"	.30	13379.00	13379.30	17
◆ 8-Cylinder 6.2 Liter (379 Cu. In.) H.D. Diesel Engine-Engine Ordering Code LL4							
C20 Series 2-Wheel Drive							
Chassis-Cab							
(56" Cab-to-Axle) ..	CC20903	ZW9 & B3J	131.5"	3.76	11580.00	11583.76	17
C30 Series 2-Wheel Drive							
Chassis-Cab							
(56" Cab-to-Axle)							
Regular Cab	CC30903	ZW9 & B3J	131.5"	3.76	11685.00	11688.76	17
Bonus Cab	CC30943	ZW9 & YG4 & B3J	164.5"	3.76	12691.00	12694.76	17
Crew Cab	CC30943	ZW9 & AS3 & B3J	164.5"	3.76	13043.00	13046.76	17
Chassis-Cab							
(60" Cab-to-Axle) ..	CC31003	ZW9 & B3J	135.5"	3.76	11752.00	11755.76	17
Chassis-Cab							
(84" Cab-to-Axle) ..	CC31403	ZW9 & B3J	159.5"	3.76	11838.00	11841.76	17
K30 Series 4-Wheel Drive							
Chassis-Cab							
(56" Cab-to-Axle)							
Regular Cab	CK30903	ZW9 & B3J	131.5"	3.76	14109.00	14112.76	17
Bonus Cab	CK30943	ZW9 & YG4 & B3J	164.5"	3.76	15048.00	15051.76	17
Crew Cab	CK30943	ZW9 & AS3 & B3J	164.5"	3.76	15402.00	15405.76	17
Chassis-Cab							
(60" Cab-to-Axle) ..	CK31003	ZW9 & B3J	135.5"	3.76	14227.00	14230.76	17
Chassis-Cab							
(84" Cab-to-Axle) ..	CK31403	ZW9 & B3J	159.5"	.30	14883.00	14883.30	17

★ Manufacturer's Suggested Retail Prices do not include applicable destination charges, state and local taxes, license fees, optional equipment or special items or services.

◆ Refer to Dealer Order Guide for California Requirements.

(a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

C/K CHASSIS CAB

THE FOLLOWING EQUIPMENT IS STANDARD ON DIESEL ENGINE MODELS (ALSO SEE STANDARD SPECIFICATIONS PAGES)

- Low Coolant Sensor
- Poly-wrapped Paper Element Air Cleaner
- Auxiliary Engine Oil Cooler provided with 4.56 ratio rear axle (in addition to cooler in radiator tank)
- Power Steering
- Engine Block Heater
- Water/fuel separator unit which incorporates a water sensor and sending unit, a fuel filter, a fuel heater and water drain capability
- Hydraulic Power-assisted Brakes
- K81 66-amp Generator
- Engine Oil Cooler (located in radiator tank)
- Dual 550 Cold Cranking Amp/115 min. Reserve Capacity Batteries
- HD Radiator
- Dual Exhaust System
- Additional Insulation:
 - Cab-to-fender insulators
 - Fiberglass hood insulator
 - Fiberglass engine compartment firewall insulator
 - Cowl side spray-on deadener
 - Driver compartment dash mat with increased mastic layer
 - Resinated cotton and mastic floor insulation
 - Full cowl interior trim panels with resinated cotton insulation
 - Vinyl-coated rubber floor mat for regular cab models
- Warning Lights: Glow Plugs, Water-in-fuel (or fuel filter), and Low Coolant
- Diesel Engine Identification:
 - Hood ornament
 - Fender nameplates
 - "Diesel Fuel Only" filler cap and label

C/K CHASSIS-CAB

C-K31003 REGULAR CAB MODELS—135.5" WB
C-K31403 REGULAR CAB MODELS—159.5" WB

GVWR SELECTOR—ALL STATES

GVW Rating (lbs)	†GAWR (lbs)		Minimum Equipment Required for GVW Rating		
			Tire Capacity (lbs ea)		Chassis Equipment
	Front	Rear	Front	Rear	

C30/3500 SERIES

9000	3800	6084	2623	3042	Standard
	3800	7000	1940	1764 (Duals)	Dual Rear Wheel Provisions (RO5)
10,000	3800	7056	1940	1764 (Duals)	Main & Auxiliary Rear Springs (G60) or Extra Capacity Rear Springs (G52); Dual Rear Wheel Provisions (RO5)

C30/3500/C7C SERIES

10,500	4000	7500	2315	2105 (Duals)	Standard
---------------	------	------	------	--------------	----------

K30/3500 SERIES

▲9200	4500	6084	2623	3042	Standard
	4500	7000	2315	2105 (Duals)	Dual Rear Wheel Provisions (RO5)
●10,000	4500	7500	2315	2105 (Duals)	Main & Auxiliary Rear Springs (G60) or Extra Capacity Rear Springs (G52); Dual Rear Wheel Provisions (RO5)

K30/3500/C7E SERIES

11,000	4500	7500	2315	2105 (Duals)	Standard
---------------	------	------	------	--------------	----------

†GAWR's shown are the maximum for each axle with equipment listed. Other GAWR's are available, and they are determined as the minimum capacity of either axle, springs or tires.

▲Not available on K31403 models.

●Standard on K31403 models.

FRONT AND REAR TIRE AVAILABILITY CHART—ALL STATES

C-K30/3500 SERIES

Spare tire to match either front or rear tires is available at extra cost.
K30/3500 models require matching front and rear tread.

Description	Capacity (lbs each)		Highway			On-Off Road			Spare
	Front/ Single Rear	Dual Rear	Front	Single Rear	Dual Rear	Front	Single Rear	Dual Rear	
TUBELESS Steel Belted Radial									
*LT215/85R16C	1940	1764	XYJ	—	YYJ	—	—	—	ZYJ
*LT215/85R16C	1940	—	XYJ	—	—	—	—	—	—
*LT215/85R16D	—	2105	—	—	YYK	—	—	—	ZYK
			—	—	—	—	—	YYL	ZYL
			—	—	—	—	—	YYL	ZYK
LT215/85R16D	2315	2105	XYK	—	YYK	—	—	—	ZYK
			—	—	—	#XYL	—	YYL	ZYL
			—	—	—	—	—	■ YYL	■ ZYK
+LT235/85R16D	2623	—	XYM	—	—	—	—	—	—
+LT235/85R16E	3042	—	XYN	YYN	—	—	—	—	ZYN
			—	—	—	#XYT	#YYT	—	#ZYT
TUBE-TYPE Nylon									
*7.50-16C	2060	1815	XPB	—	YPB	—	—	—	ZPB
			—	—	—	—	—	YPC	ZPC
			—	—	—	—	—	YPC	ZPB
*7.50-16C	2060	—	XPB	—	—	—	—	—	—
*7.50-16D	—	2140	—	—	YPF	—	—	—	ZPF
			—	—	—	—	—	YPG	ZPG
			—	—	—	—	—	YPG	ZPF
7.50-16D	2440	2140	XPF	—	YPF	—	—	—	ZPF
			—	—	—	#XPG	—	YPG	ZPG
			—	—	—	—	—	■ YPG	■ ZPF

*Available on C3 models w/o C7C only.

#Available on K3 models only.

†Not available on K31403, C7C or C7E models.

■Available on C3 models only.

C/K CHASSIS-CAB

C-K30903 REGULAR CAB MODELS—131.5" WB
C-K30943 BONUS/CREW CAB MODELS—164.5" WB
GVWR SELECTOR—ALL STATES

GVW Rating (lbs)	+GAWR (lbs)		Minimum Equipment Required for GVW Rating		
	Front	Rear	Tire Capacity (lbs ea)		Chassis Equipment
			Front	Rear	
C30/3500 SERIES REGULAR CAB					
9000	3800	6084	2623	3042	Standard
K30/3500 SERIES REGULAR CAB					
9200	4500	6084	2623	3042	Standard
C30/3500 SERIES BONUS AND CREW CAB					
9000	4000	6084	2623	3042	Standard
10,000	3880	7500	1940	2105 (Duals)	Dual Rear Wheel Provisions (R05)
C30/3500/C7C SERIES BONUS AND CREW CAB					
10,500	4000	7500	2315	2105 (Duals)	Standard
K30/3500 SERIES BONUS AND CREW CAB					
9200	4500	6084	2623	3042	Standard
10,000	4500	7500	2315	2105 (Duals)	Dual Rear Wheel Provisions (R05)
K30/3500/C7E SERIES BONUS AND CREW CAB					
11,000	4500	7500	2315	2105 (Duals)	Standard

+GAWR's shown are the maximum for each axle with equipment listed. Other GAWR's are available, and they are determined as the minimum capacity of either axle, springs or tires.

FRONT AND REAR TIRE AVAILABILITY CHART—ALL STATES

C-K30/3500 SERIES

Spare tire to match either front or rear tires is available at extra cost.
 K30/3500 models require matching front and rear tread

Description	Capacity (lbs each)		Highway			On-Off Road			Spare
	Front/Single Rear	Dual Rear	Front	Single Rear	Dual Rear	Front	Single Rear	Dual Rear	

C-K30/3500 SERIES REGULAR CABS

TUBELESS Steel Belted Radial									
LT235/85R16D	2623	—	XYM	—	—	—	—	—	—
LT235/85R16E	3042	—	—	YYN	—	—	—	—	ZYN
LT235/85R16E	3042	—	XYN	YYN	—	—	—	—	ZYN
			—	—	—	*XYT	*YYT	—	*ZYT

C30/3500 SERIES BONUS AND CREW CABS

TUBELESS Steel Belted Radial									
*LT215/85R16C	1940	—	XYJ	—	—	—	—	—	—
*LT215/85R16D	—	2105	—	—	YYK	—	—	—	ZYK
			—	—	—	—	—	YYL	ZYL
			—	—	—	—	—	YYL	ZYL
LT235/85R16D	2623	—	XYM	—	—	—	—	—	—
LT235/85R16E	3042	—	—	YYN	—	—	—	—	—
LT215/85R16D	2315	2105	XYK	—	YYK	—	—	—	ZYN
			—	—	—	—	—	YYL	ZYL
			—	—	—	—	—	YYL	ZYL
*LT235/85R16E	3042	—	XYN	YYN	—	—	—	—	ZYN
TUBE-TYPE									
*7.50-16C	2060	—	XPB	—	—	—	—	—	—
*7.50-16D	—	2140	—	—	YPF	—	—	—	ZPF
			—	—	—	—	—	YPG	ZPG
			—	—	—	—	—	YPG	ZPG
7.50-16D	2440	2140	XPF	—	YPF	—	—	—	ZPF
			—	—	—	—	—	YPG	ZPG
			—	—	—	—	—	YPG	ZPG

K30/3500 SERIES BONUS AND CREW CABS

TUBELESS Steel Belted Radial									
LT215/85R16D	2315	2105	XYK	—	YYK	—	—	—	ZYK
			—	—	—	XYL	—	YYL	ZYL
*LT235/85R16D	2623	—	XYM	—	—	—	—	—	—
*LT235/85R16E	3042	—	—	YYN	—	—	—	—	ZYN
*LT235/85R16E	3042	—	XYN	YYN	—	—	—	—	ZYN
			—	—	—	XYT	YYT	—	ZYT
TUBE-TYPE									
7.50-16D	2440	2140	XPF	—	YPF	—	XPG	—	ZPF
			—	—	—	—	—	YPG	ZPG

* Available on K30/903 models only

* Not available on C7C models.

- Not available on C7E models

C/K CHASSIS-CAB

GVWR SELECTOR—ALL STATES

GVW Rating (lbs)	†GAWR (lbs)		Minimum Equipment Required for GVW Rating	
	Front	Rear	Tire Capacity (lbs ea)	
			Front	Rear
				Chassis Equipment

C20/2500 SERIES REGULAR CAB

8600	3800	6000	2623	3042	Standard
------	------	------	------	------	----------

†GAWR's shown are the maximum for each axle with equipment listed. Other GAWR's are available, and they are determined as the minimum capacity of either axle, springs or tires.

FRONT AND REAR TIRE AVAILABILITY CHART—ALL STATES

C20/2500 SERIES

Spare tire to match either front or rear tires is available at extra cost

Description	Capacity (lbs ea)	Highway		On-Off Road	Spare
		Front	Rear	Rear	
TUBELESS Steel Belted Radial					
LT235/85R16D	2623	XYM	-	-	-
LT235/85R16E	3042	-	YYN	-	ZYN
		-	-	YYT	ZYN
		-	-	YYT	ZYT
LT235/85R16E	3042	XYN	YYN	-	ZYN
		-	-	YYT	ZYN
		-	-	YYT	ZYT

C/K CHASSIS-CAB

POWER TEAMS

ALL STATES

C-K31003 REGULAR CAB MODELS—135.5" WB

C-K31403 REGULAR CAB MODELS—159.5" WB

POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE)
(Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

W/NA5 STANDARD (Satisfies High Altitude Emission Requirements), NA6 HIGH ALTITUDE OR YF5 CALIFORNIA EMISSIONS

ENGINE	TRANSMISSION		AXLES				GVWR
	4-SP	AUTO	3.21	3.73	4.10	4.56	
-C31003-C31403 W/O R05 or C7C							
\$L25 L6 4.8 Liter (292-1BBL)	MM4		—	—	GQ1	HC4	9000
		MX1	—	—	—	GQ1	9000
\$L29 V8 5.7 Liter (350-4BBL)	MM4		—	GQ1	GT5	HC4	9000
		MX1	—	—	GQ1	HC4	9000
\$L28 V8 7.4 Liter (454-4BBL) (Reqs N41 & UA1)	MM4	MX1	*GQ1	GT4	GT5	@HC4	9000
LL4 Diesel 6.2 Liter V8 (379 Cu In)(Reqs B3J)	MM4	MX1	—	—	GQ1	HC4	9000
-K31003 W/O R05 OR C7E							
\$L25 L6 4.8 Liter (292-1BBL)	MM4	MX1	—	—	—	GQ1	9200
\$L29 V8 5.7 Liter (350-4BBL)	MM4		—	GQ1	GT5	HC4	9200
		MX1	—	—	GQ1	HC4	9200
\$L28 V8 7.4 Liter (454-4BBL)(Reqs UA1)	MM4	MX1	—	GQ1	GT5	@HC4	9200
LL4 Diesel 6.2 Liter V8 (379 Cu In)(Reqs B3J)	MM4	MX1	—	—	GQ1	HC4	9200
-C31003-C31403 W/R05 or #C7C							
\$L25 L6 4.8 Liter (292-1BBL)	MM4	MX1	—	—	—	GQ1	9/10000
\$L29 V8 5.7 Liter(350-4BBL)	MM4		—	GQ1	GT5	HC4	9000
		%MX1	—	—	GQ1	HC4	9000
	MM4	%MX1	—	—	GQ1	HC4	10000
	MM4	%MX1	—	—	GT5	GQ1	#10500
\$L28 V8 7.4 Liter (454-4BBL) (Reqs N41 & UA1)	MM4	%MX1	—	GQ1	GT5	@HC4	9/10000
	MM4	%MX1	—	GQ1	GT5	@HC4	#10500
LL4 Diesel 6.2 Liter V8 (379 Cu In) (Reqs B3J)	MM4	%MX1	—	—	GQ1	HC4	9000
	MM4	%MX1	—	—	GQ1	HC4	10000
	MM4	%MX1	—	—	GT5	GQ1	#10500
-K31003 W/R05 or #C7E: K31403							
\$L25 L6 4.8 Liter (292-1BBL) (K31003 Only)	MM4	MX1	—	—	—	GQ1	9200
	MM4	MX1	—	—	—	GQ1	10000
\$L29 V8 5.7 Liter (350-4BBL) (K31003 Only)	MM4		—	GQ1	GT5	HC4	9200
		%MX1	—	—	GQ1	HC4	9200
	MM4	%MX1	—	—	GQ1	HC4	10000
	MM4	%MX1	—	—	GT5	GQ1	11000
\$L28 V8 7.4 Liter (454-4BBL) (Reqs UA1) (K31003 Only)	MM4	%MX1	—	GQ1	GT5	@HC4	9200
	MM4	%MX1	—	GQ1	GT5	@HC4	10/11000
LL4 Diesel 6.2 Liter V8 (379 Cu In)(Reqs B3J) (K31003 Only)	MM4	%MX1	—	—	GQ1	HC4	9200
	MM4	%MX1	—	—	GQ1	HC4	10000
	MM4	%MX1	—	—	GT5	GQ1	11000

▲ C7E Reqs V8 Eng and 11000 GVW 11000 GVW Reqs C7E

*N/A G80 Locking Differential

±C7C Reqs V8 Eng & 10500 GVW 10500 GVW Reqs C7C.

%Reqs V02 Cooler

@W/MX1 Trans and C60 Air Reqs KC4 Cooler

§N/A NA6 High Altitude Emissions. With NA5 Emissions Satisfies High Altitude Requirements

▲ N/A YF5 California Emissions or NA6 High Altitude Emissions.

With NA5 Emissions Satisfies High Altitude Requirements.

■ High Altitude Emission Equipment (FOR EXHAUST SMOKE REDUCTION PURPOSES AT HIGH ALTITUDE:
NOT REQUIRED TO SATISFY HIGH ALTITUDE REGULATIONS)(REQS LL4 ENG)

C/K CHASSIS-CAB

POWER TEAMS

ALL STATES

C-K30903 REGULAR CAB MODELS—131.5" WB
C-K30943 BONUS/CREW CAB MODELS—164.5" WB

POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE)
(Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

W/NA5 STANDARD (Satisfies High Altitude Emission Requirements), NA6 HIGH ALTITUDE OR YF5 CALIFORNIA EMISSIONS

ENGINE	TRANSMISSION		AXLES						GVWR
	4-SP	AUTO	*3.21	3.73	4.10	4.5E			
-C30903-C30943 W/O R05 or C7C									
**L25 L6 4.8 Liter (292-18BL)	MM4		—	—	GQ1	HC4		9000	
		MX1	—	—	—	GQ1		9000	
\$\$LT9 V8 5.7 Liter (350-48BL)		MX1	—	—	GQ1	HC4		9000	
	MM4		—	GQ1	GT5	HC4		9000	
\$\$LE8 V8 7.4 Liter (454-48BL) (Reqs N41 & UA1)	MM4	MX1	*GQ1	GT4	GT5	@HC4		9000	
LL4 Diesel 6.2 Liter V8 (379 Cu In)(Reqs B3J)	MM4	MX1	—	—	GQ1	HC4		9000	
-K30903-K30943 W/O R05 OR C7E									
**L25 L6 4.8 Liter (292-18BL)	MM4	MX1	—	—	—	GQ1		9200	
\$\$LT9 V8 5.7 Liter (350-48BL)	MM4		—	GQ1	GT5	HC4		9200	
		MX1	—	—	GQ1	HC4		9200	
\$\$LE8 V8 7.4 Liter (454-48BL)(Reqs UA1)	MM4	MX1	—	GQ1	GT5	@HC4		9200	
LL4 Diesel 6.2 Liter V8 (379 Cu In)(Reqs B3J)	MM4	MX1	—	—	GQ1	HC4		9200	
-C30943 W/R05 or *C7C									
**L25 L6 4.8 Liter (292-18BL)	MM4	MX1	—	—	—	GQ1		10000	
\$\$LT9 V8 5.7 Liter (350-48BL)	MM4	%MX1	—	—	GQ1	HC4		10000	
	MM4	%MX1	—	—	GT5	GQ1		10500	
\$\$LE8 V8 7.4 Liter (454-48BL) (Reqs UA1 & N41)	MM4	%MX1	—	GQ1	GT5	@HC4		10/10500	
LL4 Diesel 6.2 Liter V8 (379 Cu In)(Reqs B3J)	MM4	%MX1	—	—	GQ1	HC4		10000	
	MM4	%MX1	—	—	GT5	GQ1		10500	
-K30943 W/R05 or *C7E									
**L25 L6 4.8 Liter (292-18BL)	MM4	MX1	—	—	—	GQ1		10000	
\$\$LT9 V8 5.7 Liter (350-48BL)	MM4	%MX1	—	—	GQ1	HC4		10000	
	MM4	%MX1	—	—	GT5	GQ1		11000	
\$\$LE8 V8 7.4 Liter (454-48BL)(Reqs UA1)	MM4	%MX1	—	GQ1	GT5	@HC4		10/11000	
LL4 Diesel 6.2 Liter V8 (379 Cu In)(Reqs B3J)	MM4	%MX1	—	—	GQ1	HC4		10000	
	MM4	%MX1	—	—	GT5	GQ1		11000	

*N/A G80 Locking Differential
*C7C Reqs V8 Eng & 10500 GVW. 10500 GVW Reqs C7C.
%Reqs V02 Cooler
\$C7E Reqs V8 Eng and 11000 GVW. 11000 GVW Reqs C7E.
@W/MX1 Trans and C60 Air Reqs KC4 Cooler
\$\$N/A NA6 High Altitude Emissions. With NA5 Emissions Satisfies High Altitude Requirements

**N/A YF5 California Emissions or NA6 High Altitude Emissions.
With NA5 Emissions Satisfies High Altitude Requirements.

■ High Altitude Emission Equipment (FOR EXHAUST SMOKE REDUCTION PURPOSES AT HIGH ALTITUDE;
NOT REQUIRED TO SATISFY HIGH ALTITUDE REGULATIONS)(REQS LL4 ENG)

C/K CHASSIS-CAB

POWER TEAMS

ALL STATES

C20/2500 SERIES

POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE)

(Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

W/NA5 STANDARD (Satisfies High Altitude Emission Requirements), NA6 HIGH ALTITUDE ■ OR YF5 CALIFORNIA EMISSIONS

ENGINE	TRANSMISSION			AXLES						GVWR
	4-SP	AUTO		3.21	3.42	3.73	4.10	4.58		
*L25 L6 4.8 Liter (292-188L)	MM4			—	—	—	GQ1	HC4		8600
*L79 V8 5.7 Liter (350-488L)	MM4			—	GQ1	GT4	GT5	—		8600
		MX1		—	—	—	GQ1	HC4		8600
*L88 V8 7.4 Liter (454-488L) (Reqs UA1 & N41)	MM4	MX1		*GQ1	—	GT4	GT5	—		8600
LL4 Diesel (379 Cu in) (Reqs B3J)	MM4			—	—	GQ1	GT5	—		8600
		MX1		—	—	—	GQ1	HC4		8600

*N/A G80 Locking Differential

*N/A NA6 High Altitude Emissions. With NA5 Emissions
Satisfies High Altitude Requirements

*N/A YF5 California Emissions or NA6 High Altitude Emissions.
With NA5 Emissions Satisfies High Altitude Requirements.

- High Altitude Emission Equipment (FOR EXHAUST SMOKE REDUCTION PURPOSES AT HIGH-ALTITUDE;
NOT REQUIRED TO SATISFY HIGH ALTITUDE REGULATIONS)(REQS LL4 ENG)

ENGINE RATINGS

ALL STATES EXCEPT CALIFORNIA

SAE Net Ratings	**4.8 Liter 292 1-bbl L6	**5.7 Liter 350 4-bbl V8	**7.4 Liter 454 4-bbl V8	**6.2 Liter 379 V8 Diesel
Net Horsepower	115 @ 4000 rpm	185 @ 4000 rpm	240 @ 3800 rpm	148 @ 3600 rpm
Net Torque, lb-ft	210 @ 800 rpm	285 @ 2400 rpm	375 @ 3200 rpm	246 @ 2000 rpm

**Engines with Heavy Duty Emissions (w/GVWR over 8500 lb.).

CALIFORNIA ONLY


SAE Net Ratings	**5.7 Liter 350 4-bbl V8	**7.4 Liter 454 4-bbl V8	**6.2 Liter 379 V8 Diesel
Net Horsepower	155 @ 4000 rpm	240 @ 3800 rpm	148 @ 3600 rpm
Net Torque, lb-ft	240 @ 2800 rpm	375 @ 3200 rpm	246 @ 2000 rpm

**Engines with Heavy Duty Emissions (w/GVWR over 8500 lb.).

C/K CHASSIS-CAB

Body Ordering Codes:
 Bonus Cab—ZW9/YG4/B3J
 Crew Cab—ZW9/AS3/B3J

DIESEL

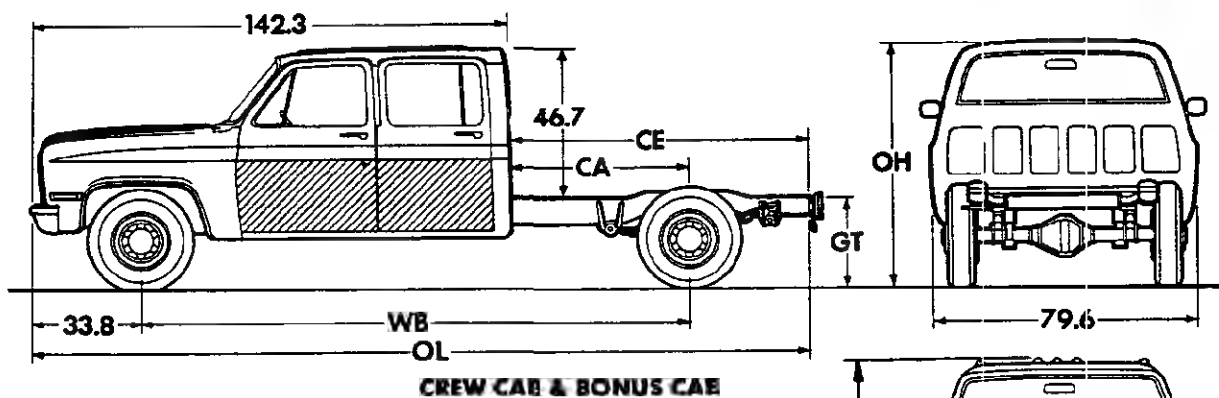

Sign Panel Area (side)
 22" x 72 1/4"



Series	Ground Clearance (in)★	
	Front	Rear
C3	9.1	7.7
K3	8.3	7.7

Model	Engine No. Cyl.	Dimensions (lb)★						Curb Weight (lb)			Model Weight (lb)†			Body-Payload Wt. Dist.*		
		WB	CA	CE	OL	OH	GT	Front	Rear	Total	Front	Rear	Total	Body	% Front	% Rear

C30/3500 SERIES

C30943 (Bonus Cab)	8	164.5	56	97	239.3	74.0	29.7	3144	1770	4914	3429	1935	4364	7' 7.5" 8' 4" 8.5'	7 5 4 2	93 95 96 98
C30943 (Crew Cab)	8	164.5	56	97	239.3	74.0	29.7	3171	1804	4975	3651	2224	5875	7' 7.5" 8' 4" 8.5'	7 5 4 2	93 95 96 98
C30943 w/C7C (Bonus Cab)	8	164.5	56	97	239.3	74.5	29.0	3200	1834	5034	3485	1999	5484	7' 7.5" 8' 4" 8.5'	7 5 4 2	93 95 96 98
C30943 w/C7C (Crew Cab)	8	164.5	56	97	239.3	74.5	29.0	3227	1868	5095	3707	2288	5995	7' 7.5" 8' 4" 8.5'	7 5 4 2	93 95 96 98

K30/3500 SERIES

K30943 (Bonus Cab)	8	164.5	56	97	239.3	76.6	32.0	3556	1822	5378	3841	1987	5828	7' 7.5" 8' 4" 8.5'	7 5 4 2	93 95 96 98
K30943 (Crew Cab)	8	164.5	56	97	239.3	76.6	32.0	3583	1856	5439	4063	2276	6339	7' 7.5" 8' 4" 8.5'	7 5 4 2	93 95 96 98
K30943 w/C7E (Bonus Cab)	8	164.5	56	97	239.3	76.6	31.3'	3599	1897	5496	3884	2062	5946	7' 7.5" 8' 4" 8.5'	7 5 4 2	93 95 96 98
K30943 w/C7E (Crew Cab)	8	164.5	56	97	239.3	76.6	31.3	3626	1931	5557	4106	2351	6457	7' 7.5" 8' 4" 8.5'	7 5 4 2	93 95 96 98

★Dimensions with standard equipment, unloaded


*Estimate based on water-level loading.

†Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb). Total Model Weight may vary as much as ±50 lbs. to allow for production build variation.

GASOLINE

C/K CHASSIS-CAB

Body Ordering Codes:
 Bonus Cab—ZW9 & YG4
 Crew Cab—ZW9 & AS3

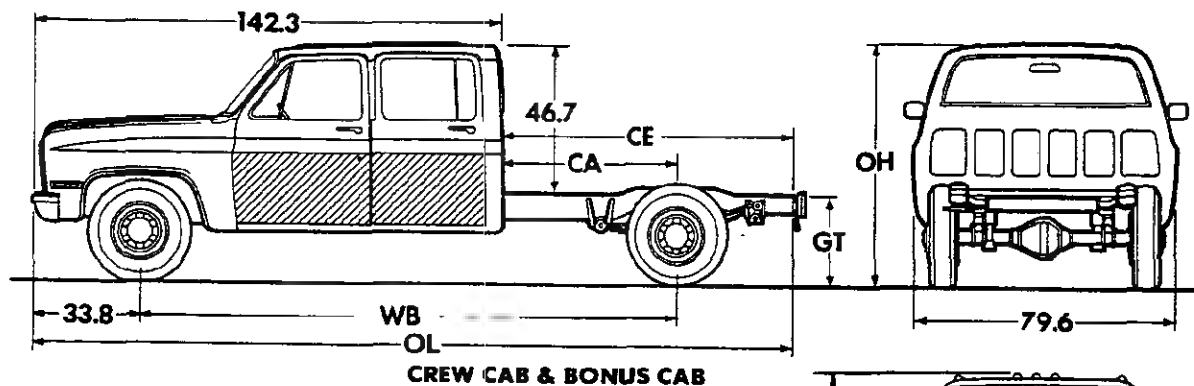


CREW CAB & BONUS CAB

Sign Panel Area (side)
 22" x 72 1/4"



Series	Ground Clearance (in)★	
	Front	Rear
C3	9.1	7.7
K3	8.3	7.7

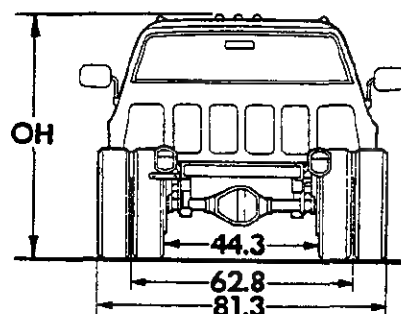

Model	Engine No. Cyl.	Dimensions (lb)★						Curb Weight (lb)			Model Weight (lb)†			Body-Payload Wt. Dist.*		
		WB	CA	CE	OL	OH	GT	Front	Rear	Total	Front	Rear	Total	Body	% Front	% Rear

C30/3500 SERIES

C30943 (Bonus Cab)	6	164.5	56	97	239.3	74.0	29.7	2744	1707	4451	3029	1872	4901	7' 7.5' 8' 8.5'	7 5 4 2	93 95 96 98
C30943 (Crew Cab)	6	164.5	56	97	239.3	74.0	29.7	2771	1741	4512	3251	2161	5412	7' 7.5' 8' 8.5'	7 5 4 2	93 95 96 98
C30943 w/C7C (Bonus Cab)	8	164.5	56	97	239.3	74.5	29.0	2797	1742	4539	3082	1907	4989	7' 7.5' 8' 8.5'	7 5 4 2	93 95 96 98
C30943 w/C7C (Crew Cab)	8	164.5	56	97	239.3	74.5	29.0	2824	1776	4600	3304	2196	5500	7' 7.5' 8' 8.5'	7 5 4 2	93 95 96 98

K30/3500 SERIES

K30943 (Bonus Cab)	6	164.5	56	97	239.3	76.6	32.0	3156	1759	4915	3441	1924	5365	7' 7.5' 8' 8.5'	7 5 4 2	93 95 96 98
K30943 (Crew Cab)	6	164.5	56	97	239.3	76.6	32.0	3183	1793	4976	3663	2213	5876	7' 7.5' 8' 8.5'	7 5 4 2	93 95 96 98
K30943 w/C7E (Bonus Cab)	8	164.5	56	97	239.3	76.6	31.3	3199	1823	5022	3484	1988	5472	7' 7.5' 8' 8.5'	7 5 4 2	93 95 96 98
K30943 w/C7E (Crew Cab)	8	164.5	56	97	239.3	76.6	31.3	3226	1857	5083	3706	2277	5983	7' 7.5' 8' 8.5'	7 5 4 2	93 95 96 98

★Dimensions with standard equipment, unloaded.


*Estimate based on water-level loading.

†Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb). Total Model Weight may vary as much as ±50 lbs to allow for production build variation.

C/K CHASSIS-CAB


Body Ordering Code—ZW9/B3J

DIESEL

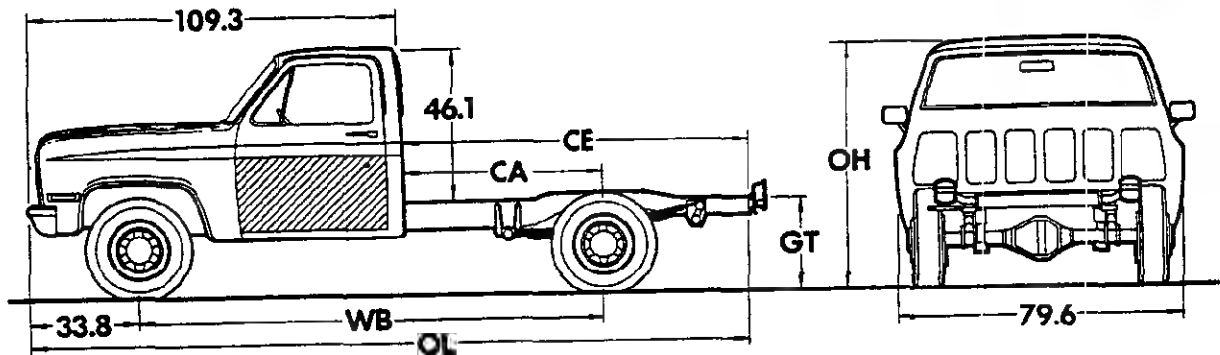


REGULAR CAB

Sign Panel Area (side)
22" x 39½"



Series	Ground Clearance (in)★	
	Front	Rear
K3	8.3	7.7

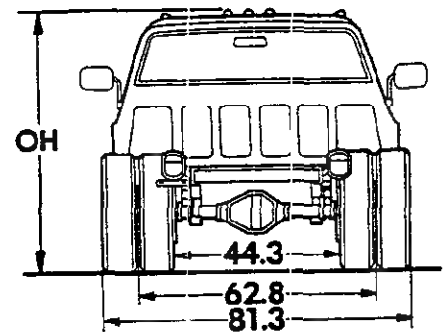

Model	Engine No. Cyl.	Dimensions (in)★						Curb Weight (lb)			Model Weight (lb)†			Body-Payload Wt. Dist.‡		
		WB	CA	CE	OL	OH	GT	Front	Rear	Total	Front	Rear	Total	Body	% Front	% Rear

K30/3500 SERIES

K30903	8	131.5	56	97	206.2	76.1	32.3	3316	1629	4945	3562	1833	5395	7'	9	91
														7.5'	7	93
														8'	5	95
														8.5'	2	98
K31003	8	135.5	60	106.5	215.6	76.1	32.5	3332	1657	4989	3584	1855	5439	7.5'	10	90
														8'	7	93
														8.5'	5	95
														9'	3	97
K31003 (W/C7E)	8	135.5	60	106.5	215.6	77.1	31.9	3351	1715	5066	3603	1913	5516	7.5'	10	90
														8'	7	93
														8.5'	5	95
														9'	3	97
K31403	8	159.5	84	130.5	239.7	75.2	31.4	3479	1780	5259	3761	1948	5709	10'	14	86
														11'	10	90
														12'	6	94
														13'	4	96
K31403 (W/C7E)	8	159.5	84	130.5	239.7	77.1	31.9	3489	1785	5274	3771	1953	5724	10'	14	86
														11'	10	90
														12'	6	94
														13'	4	96

★Dimensions with standard equipment, unloaded.


*Estimate based on water-level loading.

†Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb). Total Model Weight may vary as much as ±50 lbs. to allow for production build variation.

GASOLINE

C/K CHASSIS-CAB

Body Ordering Code—ZW9

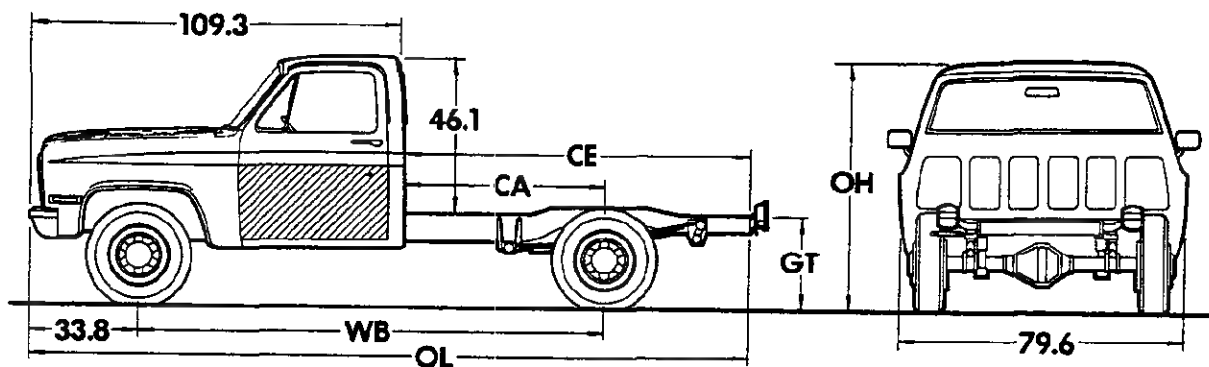


REGULAR CAB

Sign Panel Area (side)

22" x 39½"



Series	Ground Clearance (in)★	
	Front	Rear
K3	8.3	7.7

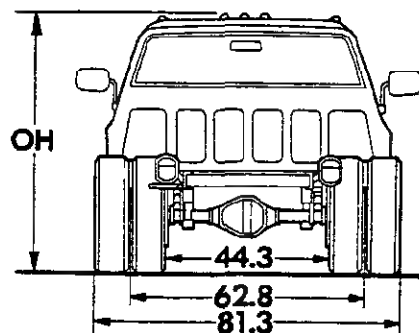

Model	Engine No. Cyl.	Dimensions (in)★						Curb Weight (lb)			Model Weight (lb)†			Body-Payload Wt. Dist.†		
		WB	CA	CE	OL	OH	GT	Front	Rear	Total	Front	Rear	Total	Body	% Front	% Rear

K30/3500 SERIES

K30903	6	131.5	56	97	206.3	75.1	32.3	2914	1577	4491	3160	1781	4941	7'	9	91
														7.5'	7	93
														8'	5	95
														8.5'	2	98
K31003	6	135.5	60	106.5	215.6	76.1	32.5	2930	1605	4535	3182	1803	4985	7.5'	10	90
														8'	7	93
														8.5'	5	95
														9'	3	97
K31003 (W/C7E)	8	135.5	60	106.5	215.6	77.1	31.9	2958	1663	4621	3210	1861	5071	7.5'	10	90
														8'	7	93
														8.5'	5	95
														9'	3	97
K31403	6	159.5	84	130.5	239.7	75.2	31.4	3076	1718	4794	3358	1886	5244	10'	14	85
														11'	10	90
														12'	6	94
														13'	4	96
K31403 (W/C7E)	8	159.5	84	130.5	239.7	77.1	31.9	3086	1723	4809	3368	1891	5259	10'	14	86
														11'	10	90
														12'	6	94
														13'	4	96


★Dimensions with standard equipment, unloaded.

†Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb). Total Model Weight may vary as much as ±50 lbs. to allow for production build variation.

C/K CHASSIS-CAB


Body Ordering Code—ZW9/B3J

DIESEL

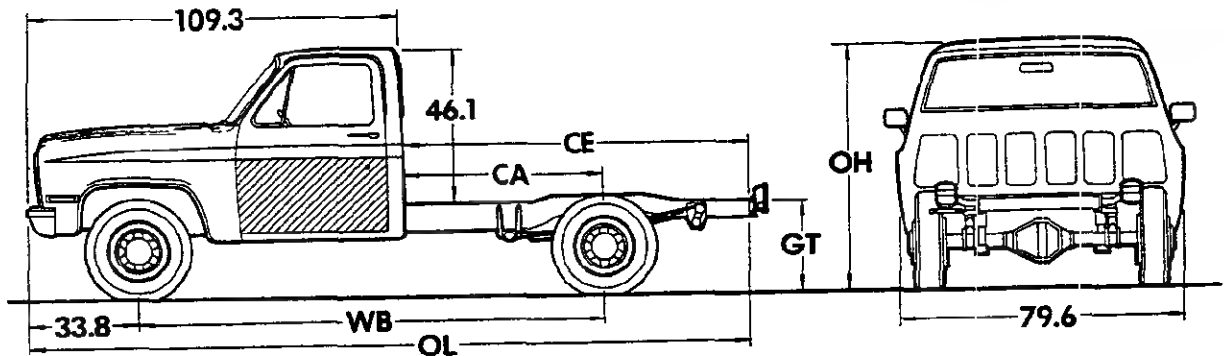

REGULAR CAB

Sign Panel Area (side)
22" x 39½"

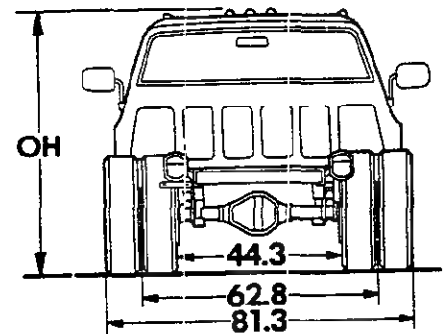

Series	Ground Clearance (in)★	
	Front	Rear
C2	8.4	8.4
C3	9.3	8.2

Model	Engine No. Cyl.	Dimensions (in)★						Curb Weight (lb)			Model Weight (lb)†			Body-Payload Wt. Dist:		
		WB	CA	CE	OL	OH	GT	Front	Rear	Total	Front	Rear	Total	Body	% Front	% Rear
C20/2500 SERIES																
C20903	8	131.5	56	97	206.3	72.8	29.3	2796	1337	4133	3042	1541	4583	7' 7.5' 8' 8.5'	9 7 5 2	91 93 95 98
C30/3500 SERIES																
C30903	8	131.5	56	97	206.3	73.4	30.4	2899	1557	4456	3145	1761	4906	7' 7.5' 8' 8.5'	8 5 4 2	91 95 96 98
C31003	8	135.5	60	106.5	215.8	73.4	30.4	2936	1563	4499	3188	1761	4949	7.5' 8' 8.5'	10 7 5	90 93 95
C31003 (W/C7C)	8	135.5	60	106.5	215.8	74.9	29.3	2986	1614	4600	3238	1812	5050	8.5' 9'	3	97
C31403	8	159.5	84	130.5	239.8	73.4	30.4	3017	1549	4566	3299	1717	5016	10' 11'	14 10	86 90
C31403 (W/C7C)	8	159.5	84	130.5	239.8	74.9	29.3	3070	1600	4670	3352	1768	5120	12' 13'	6 4	94 96

★ Dimensions with standard equipment, unloaded.


* Estimate based on water-level loading.

† Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb). Total Model Weight may vary as much as ±50 lbs. to allow for production build variation.

GASOLINE

C/K CHASSIS-CAB

Body Ordering Code—ZW9

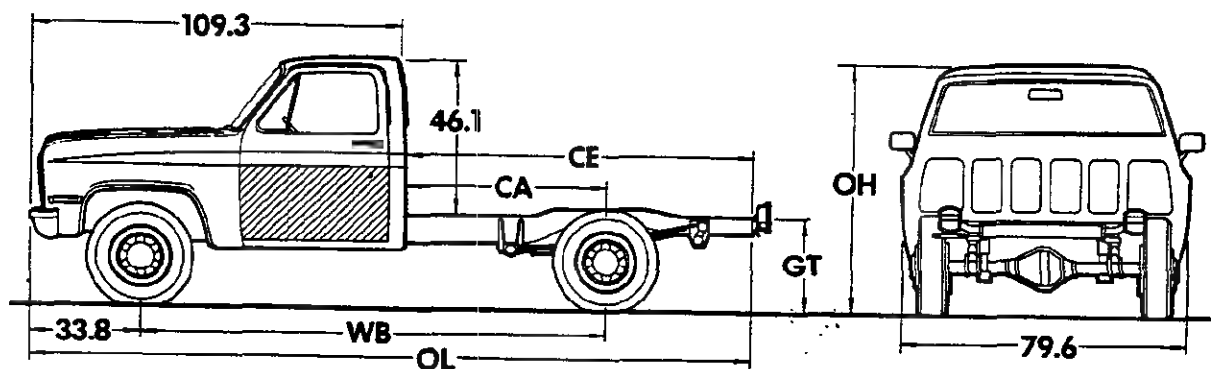


REGULAR CAB

REGULAR CAB

Sign Panel Area (side)

22" x 39 1/4"

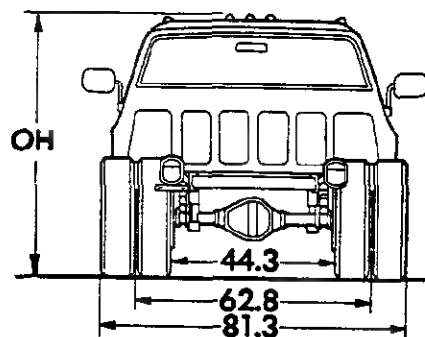

Series	Ground Clearance (in)★	
	Front	Rear
C2	8.4	8.4
C3	9.3	8.2

Model	Engine No. Cyl.	Dimensions (in)★						Curb Weight (lb)			Model Weight (lb)†			Body-Payload Wt. Dist.*		
		WB	CA	CE	OL	OH	GT	Front	Rear	Total	Front	Rear	Total	Body	% Front	% Rear

C20/2500 SERIES

C20903	6	131.5	56	97	206.3	72.8	29.3	2289	1281	3570	2535	1485	4020	7' 7.5' 8' 8.5'	9 7 5 2	91 93 95 98
--------	---	-------	----	----	-------	------	------	------	------	------	------	------	------	-----------------	---------	-------------

C30/3500 SERIES

C30903	6	131.5	56	97	206.3	73.4	30.4	2506	1505	4011	2752	1709	4461	7' 7.5' 8' 8.5'	9 5 4 2	91 95 96 98
C31003	6	135.5	60	106.5	215.8	73.4	30.4	2543	1511	4054	2795	1709	4504	7.5' 8' 8.5'	10 7 5 3	90 93 95 97
C31003 (W/C7C)	8	135.5	60	106.5	215.8	74.9	29.3	2596	1562	4158	2848	1760	4608	8.5' 9'	14 10 6 4	86 90 94 96
C31403	6	159.5	84	130.5	239.8	73.4	30.4	2625	1488	4113	2907	1656	4563	10' 11' 12' 13'	14 10 6 4	86 90 94 96
C31403 (W/C7C)	8	159.5	84	130.5	239.8	74.9	29.3	2678	1539	4217	2960	1707	4667	10' 11' 12' 13'	14 10 6 4	86 90 94 96

★Dimensions with standard equipment, unloaded.

*Estimate based on water-level loading.

†Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb) Total Model Weight may vary as much as ±50 lbs. to allow for production build variation.

C/K CHASSIS-CAB—4-Wheel Drive

K30/3500 BONUS CAB & CREW CAB

DIESEL

STANDARD SPECIFICATIONS

(See Gray Tab Section for Specification Details)

Series	K30/3500 Bonus/Crew Cab	ΔK30/3500/C7E Bonus/Crew Cab
Engine	6.2 Liter, 379 Cu. In. V8 Diesel	
Base Equip.	12"; 150 sq. in.	
Clutch	Poly-wrapped, Oiled-paper Element	
Air Filter	Throwaway type	
Oil Filter	Standard	
Oil Cooler	Dual; Aluminized	
Exhaust System	See Engine & Cooling Section for specific model applications	
Emission Control Systems		
Suspension, Front	Salisbury Axle; Hypoid Drive; Single Stage Leaf Springs	
Capacity	4500 lb.	
Axle Ratio	4.10	4.56
Springs @ Ground	2250 lb. ea.	
Shock Absorbers	32mm	
Stabilizer Bar	1.25" dia.	
Hubs, Manual Locking	Standard	
Suspension, Rear	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs	
Axle Capacity	7500 lb.	
Axle Ratio	4.10	4.56
Springs @ Ground	3500 lb. ea.	3750 lb. ea.
Shock Absorbers	32mm dia.	
Brakes	Hydraulic—Self-adjusting	
Front	Disc; 12.8" Rotor	
Rear	Drum; 13.0" x 3.5"	
Booster	Hydraulic Power	
Parking	Cable to Rear Wheels	
Electrical	12 Volt; Negative Ground	
Battery—Freedom Type	Two; 550 CCA ♦ ea. @ 0°F.	
—Reserve Capacity	115 min. ea. @ 80°F.	
Delcotron Generator	66 amp.	
Engine Block Heater	600 watts, 120 volts	
Frame	Carbon Steel; 36,-39,000 psi	
Section Modulus	7.33	
Fuel Tank (nominal capacity)	20 gal.	
Steering Gear Type	Integral Power	
Transmission	4-Speed Manual (SM 465)	
Shift Location	Floor	
Transfer Case	New Process 205 2-Speed Conventional	
Shift Lever	Single Lever	
PTO Opening	Left Side	
Tires—Front	(2) LT235/85R16D(8PR)	(2) LT215/85R16D(8PR)
—Rear	(2) LT235/85R16E(10PR)	(4) LT215/85R16D(8PR)
Wheels	(4) Disc 16" x 6.5"	(6) Disc 16" x 6.0"

♦CCA-Cold Cranking Amps.

ΔIn addition to the standard equipment listed above, the K30/3500/C7E model also includes engine frame crossmember reinforcements, RPO U01 cab roof marker lamps and an 11,000-lb GVW Rating.

GASOLINE**C/K CHASSIS-CAB—4-Wheel Drive****K30/3500 BONUS CAB & CREW CAB****STANDARD SPECIFICATIONS**

(See Gray Tab Section for Specification Details)

Series	K30/3500 Bonus/Crew Cab	▲K30/3500/C7E Bonus/Crew Cab
Engine		
Base Equip.	4.8 Liter, 292 i-bbl. L6	5.7 Liter, 350 4-bbl. V8
Clutch	11"; 124 sq. in.	12"; 150 sq. in.
Air Filter	Oiled-paper Element	
Oil Filter	Throwaway type	
Exhaust System	Single; Stainless Steel	*Dual; Stainless Steel
Emission Control Systems	See Engine & Cooling Section for specific model applications	
Suspension, Front	Salisbury Axle; Hypoid Drive; Single Stage Leaf Springs	
Capacity	4500 lb.	
Axle Ratio	4.56	
Springs @ Ground	2250 lb. ea.	
Shock Absorbers	32mm	
Stabilizer Bar	1.25" dia.	
Hubs, Manual Locking	Standard	
Suspension, Rear	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs	
Axle Capacity	7500 lb.	
Axle Ratio	4.56	
Springs @ Ground	3500 lb. ea.	3750 lb. ea.
Shock Absorbers	32mm dia.	
Brakes	Hydraulic—Self-adjusting	
Front	Disc; 12.8" Rotor	
Rear	Drum; 13.0" x 3.5"	
Booster	Hydraulic Power	
Parking	Cable to Rear Wheels	
Electrical	12 Volt; Negative Ground	
Battery—Freedom Type	405 CCA ♦ @ 0°F.	
—Reserve Capacity	75 min. @ 80°F.	
Delcotron Generator	37 amp.	66 amp.
Frame	Carbon Steel; 36,-39,000 psi	
Section Modulus	7.33	
Fuel Tank (nominal capacity)	20 gal.	
Steering Gear Type	Integral Power	
Transmission	4-Speed Manual (SM 465)	
Shift Location	Floor	
Transfer Case	New Process 205 2-Speed Conventional	
Shift Lever	Single Lever	
PTO Opening	Left Side	
Tires—Front	(2) LT235/85R16D(8PR)	(2) LT215/85R16D(8PR)
—Rear	(2) LT235/85R16E(10PR)	(4) LT215/85R16D(8PR)
Wheels	(4) Disc 16" x 6.5"	(6) Disc 16" x 6.0"

♦ CCA-Cold Cranking Amps.

▲ In addition to the standard equipment listed above, the K30/3500/C7E model also includes engine frame crossmember reinforcements, RPO U01 cab roof marker lamps and an 11,000-lb. GVW rating.

*Single; Aluminized for California

C/K CHASSIS-CAB—4-Wheel Drive

DIESEL

K30/3500 REGULAR CABS

STANDARD SPECIFICATIONS

(See Gray Tab Section for Specification Details)

Series	K30/3500 Regular Cab	AK30/3500/C7E Regular Cab
Engine	6.2 Liter, 379 Cu. In. V8 Diesel	
Base Equip.	12"; 150 sq. in.	
Clutch	Poly-wrapped, Oiled-paper Element	
Air Filter	Throwaway type	
Oil Filter	Standard	
Oil Cooler	Dual, Aluminized	
Exhaust System	See Engine & Cooling Section for specific model applications	
Emission Control Systems		
Suspension, Front	Salisbury Axle; Hypoid Drive; Single Stage Leaf Springs	
Capacity	4500 lb.	
Axle Ratio	4.10	4.56
Springs @ Ground	2250 lb. ea.	
Shock Absorbers	32mm	
Stabilizer Bar	1.25" dia.	
Hubs, Manual Locking	Standard	
Suspension, Rear	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs	
Axle Capacity	7500 lb.	
Axle Ratio	4.10	4.56
Springs @ Ground	■3500 lb. ea.	3750 lb. ea.
Shock Absorbers	32mm dia.	
Brakes	Hydraulic—Self-adjusting	
Front	Disc; 12.8" Rotor	
Rear	Drum; 13.0" x 3.5"	
Booster	Hydraulic Power	
Parking	Cable to Rear Wheels	
Electrical	12 Volt, Negative Ground	
Battery—Freedom Type	Two; 550 CCA ♦ ea. @ 0°F.	
—Reserve Capacity	115 min. ea. @ 80°F.	
Delcotron Generator	66 amp.	
Engine Block Heater	600 watts, 120 volts	
Frame	Carbon Steel; 36,-39,000 psi	
Section Modulus	131.5" WB-6.14	
	135.5" 159.5" WB-7.33	
Fuel Tank (nominal capacity)	20 gal.	
Steering Gear Type	Integral Power	
Transmission	4-Speed Manual (SM 465)	
Shift Location	Floor	
Transfer Case	New Process 205 2-Speed Conventional	
Shift Lever	Single Lever	
PTO Opening	Left Side	
Tires—Front	*(2) LT235/85R16D (8PR)	(2) LT215/85R16D (8PR)
—Rear	*(2) LT235/85R16E (10PR)	(4) LT215/85R16D (8PR)
Wheels	*(4) Disc 16" x 6.0"	(6) Disc 16" x 5.0"

■3750 lb. ea. on K31403 model

♦CCA-Cold Cranking Amps

*On model K31403 Chassis-Cab dual rear wheels are standard equipment and include (6) LT215/85R16D (8PR) tires and (6) 16" x 6.0" disc wheels.

▲In addition to the standard equipment listed above, the K30/3500/C7E model also includes engine frame crossmember reinforcements, RPO U01 cab roof marker lamps and an 11,000-lb GVW Rating.

GASOLINE**C/K CHASSIS-CAB—4-Wheel Drive****K30/3500 REGULAR CABS****STANDARD SPECIFICATIONS**

(See Gray Tab Section for Specification Details)

Series	K30/3500 Regular Cab	▲K30/3500/C7E Regular Cab
Engine		
Base Equip.	4.8 Liter, 292 1-bbl. L6	5.7 Liter, 350 4-bbl. V8
Clutch	11"; 124 sq. in.	12"; 150 sq. in.
Air Filter	Oiled-paper Element	
Oil Filter	Throwaway type	
Exhaust System	Single, Stainless Steel	**Dual; Stainless Steel
Emission Control Systems	See Engine & Cooling Section for specific model applications	
Suspension, Front	Salisbury Axle; Hypoid Drive; Single Stage Leaf Springs	
Capacity	4500 lb.	
Axle Ratio	4.56	
Springs @ Ground	2250 lb. ea.	
Shock Absorbers	32mm	
Stabilizer Bar	1.25" dia.	
Hubs, Manual Locking	Standard	
Suspension, Rear	Salisbury Axle; Hypoid Drive, Two-stage Multi-leaf Springs	
Axle Capacity	7500 lb.	
Axle Ratio	4.56	
Springs @ Ground	■3500 lb. ea.	3750 lb. ea.
Shock Absorbers	32mm dia.	
Brakes	Hydraulic—Self-adjusting	
Front	Disc; 12.5" Rotor	
Rear	Drum; 13.0" x 3.5"	
Booster	Hydraulic Power	
Parking	Cable to Rear Wheels	
Electrical	12 Volt; Negative Ground	
Battery—Freedom Type	405 CCA ♦ @ 0°F.	
—Reserve Capacity	75 min. @ 80°F.	
Delcotron Generator	•37 amp.	66 amp.
Frame	Carbon Steel, 36,-39,000 psi	
Section Modulus	131.5" WB—6.14	
	135.5" 159.5" WB—7.33	
Fuel Tank (nominal capacity)	20 gal.	
Steering Gear Type	Integral Power	
Transmission	4-Speed Manual (SM 465)	
Shift Location	Floor	
Transfer Case	New Process 205 2-Speed Conventional	
Shift Lever	Single Lever	
PTO Opening	Left Side	
Tires—Front	*(2) LT235/85R16D (8PR)	(2) LT215/85R16D (8PR)
—Rear	*(2) LT235/85R16E (10PR)	(4) LT215/85R16D (8PR)
Wheels	*(4) Disc 16" x 6.0"	(6) Disc 16" x 6.0"

■3750 lb. ea. on K31403 model.

♦CCA-Cold Cranking Amps

*On model K31403 Chassis-Cab dual rear wheels are standard equipment and include (6) LT215/85R16D (8PR) tires and (6) 16" x 6.0" disc wheels.

•66 amp on K31403 model.

▲In addition to the standard equipment listed above, the K30/3500/C7E model also includes engine frame crossmember reinforcements, RPO U01 cab roof marker lamps and an 11,000-lb. GVW rating.

**Single; Aluminized for California

C/K CHASSIS-CAB—2-Wheel Drive

C30/3500 BONUS CABS & CREW CABS

DIESEL

STANDARD SPECIFICATIONS

(See Gray Tab Section for Specification Details)

Series	C30/3500 Bonus/Crew Cab	▲C30/3500/C7C Bonus/Crew Cab
Engine		
Base Equipment	6.2 Liter, 379 Cu. In. V8 Diesel	
Clutch	12"; 150 sq. in.	
Air Filter	Poly-wrapped Oiled-paper Element	
Oil Filter	Throwaway type	
Oil Cooler	Standard	
Exhaust System	Dual; Aluminized	
Emission Control Systems	See Engine & Cooling Section for specific model applications	
Suspension, Front	Independent; Coil Springs	
Capacity	4000 lb.	
Springs @ Ground	2000 lb. ea.	
Shock Absorbers	32mm	
Suspension, Rear	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs	
Axle Capacity	7500 lb.	
Axle Ratio	4.10	4.56
Springs @ Ground	3500 lb. ea.	3750 lb. ea.
Shock Absorbers	32mm	
Brakes	Hydraulic; Self-adjusting	
Front	Disc; 12.5" rotor	
Rear	Drum; 13" x 3.5"	
Booster	Hydraulic Power	
Parking	Cable to Rear Wheels	
Electrical	12 Volt; Negative Ground	
Battery—Freedom Type	Two; 550 CCA♦ ea. @ 0°F.	
—Reserve Capacity	115 min. ea. @ 80°F.	
Delcotron Generator	66 amp.	
Engine Block Heater	600 watts, 120 volts	
Frame	Carbon Steel; 36,-39,000 psi	
Section Modulus	7.33	
Fuel Tank (Nominal Capacity)	20 gal.	
Steering Gear Type	Integral Power	
Transmission	4-Speed Manual (SM 465)	
Shift Location	Floor	
Tires—Front	(2) LT235/85R16D (8PR)	(2) LT215/85R16D (8PR)
—Rear	(2) LT235/85R16E (10PR)	(4) LT215/85R16D (8PR)
Wheels	(4) Disc	(6) Disc
Size	16" x 6.5"	16" x 6.0"

♦CCA—Cold Cranking Amps

▲In addition to the standard equipment listed above, the C30/3500/C7C model also includes front suspension control arm reinforcements, air-assisted coil front springs, engine frame crossmember reinforcements, RPO U01 cab roof marker lamps and a 10,500-lb GVW rating.

GASOLINE**C/K CHASSIS-CAB—2-Wheel Drive****C30/3500 BONUS CABS & CREW CABS****STANDARD SPECIFICATIONS**

(See Gray Tab Section for Specification Details)

Series	C30/3500 Bonus/Crew Cab	▲C30/3500/C7C Bonus/Crew Cab
Engine		
Base Equipment	4.8 Liter, 292 1-bbl L6	5.7 Liter, 350 4-bbl V8
Clutch	11"; 124 sq. in.	12"; 150 sq. in.
Air Filter	Oiled-paper Element	
Oil Filter	Throwaway type	
Exhaust System	Single; Stainless Steel	*Dual; Stainless Steel
Emission Control Systems	See Engine & Cooling Section for specific model applications	
Suspension, Front	Independent	
Type	Coil Springs	Air Assisted Coil Springs
Capacity	4000 lb.	
Springs @ Ground	2000 lb. ea.	
Shock Absorbers	32mm	
Suspension, Rear	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs	
Axle Capacity	7500 lb.	
Axle Ratio	4.10	4.56
Springs @ Ground	3500 lb. ea.	3750 lb. ea.
Shock Absorbers	32mm	
Brakes	Hydraulic; Self-adjusting	
Front	Disc; 12.5" rotor	
Rear	Drum; 13" x 3.5"	
Booster	Hydraulic Power	
Parking	Cable to Rear Wheels	
Electrical	12 Volt; Negative Ground	
Battery—Freedom Type	405 CCA♦ @ 0°F.	
—Reserve Capacity	75 min. @ 80°F.	
Delcotron Generator	37 amp	66 amp.
Frame	Carbon Steel; 36,-39,000 psi	
Section Modulus	7.33	
Fuel Tank (Nominal Capacity)	20 gal.	
Steering Gear Type	Manual; Recirculating Ball Gear	
Linkage	Parallelogram	
Transmission	4-Speed Manual (SM 465)	
Shift Location	Floor	
Tires—Front	(2) LT235/85R16D (8PR)	(2) LT215/85R16D (8PR)
—Rear	(2) LT235/85R16E (10PR)	(4) LT215/85R16D (8PR)
Wheels	(4) Disc	(6) Disc
Size	16" x 6.5"	16" x 6.0"

*Single; Aluminized for California

♦CCA-Cold Cranking Amps

▲In addition to the standard equipment listed above, the C30/3500/C7C model also includes front suspension control arm reinforcements, air-assisted coil front springs, engine frame crossmember reinforcements, RPO U01 cab roof marker lamps and a 10,500-lb GVW rating.

C/K CHASSIS-CAB—2-Wheel Drive

C30/3500 REGULAR CABS

DIESEL

STANDARD SPECIFICATIONS

(See Gray Tab Section for Specification Details)

Series	C30/3500	▲C30/3500/C7C
Engine	6.2 Liter, 379 Cu. In. V8 Diesel	
Base Equipment	12"; 150 sq. in.	
Clutch	Poly-wrapped, Oiled-paper Element	
Air Filter	Throwaway type	
Oil Filter	Standard	
Oil Cooler	Dual; Aluminized	
Exhaust System	See Engine & Cooling Section for specific model applications	
Emission Control Systems		
Suspension, Front	Independent; Coil Springs	
Capacity	3800 lb.	4000 lb.
Springs @ Ground	1900 lb. ea.	2000 lb. ea.
Shock Absorbers	32mm	
Suspension, Rear	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs	
Axle Capacity	7500 lb.	
Axle Ratio	4.10	4.56
Springs @ Ground	3500 lb. ea.	3750 lb. ea.
Shock Absorbers	32mm	
Brakes	Hydraulic; Self-adjusting	
Front	Disc; 12.5" Rotor	
Rear	Drum; 13" x 3.5"	
Booster	Hydraulic Power	
Parking	Cable to Rear Wheels	
Electrical	12 Volt; Negative Ground	
Battery—Freedom Type	Two; 550 CCA♦ ea. @ 0°F.	
—Reserve Capacity	115 min. ea. @ 80°F.	
Delcotron Generator	66 amp.	
Engine Block Heater	600 watts, 120 volts	
Frame	Carbon Steel; 36,39,000 psi	
Section Modulus—131.5" WB.	6.14	
—135.5"/159.5" WB.	7.33	
Fuel Tank (Nominal Capacity)	20 gal.	
Steering Gear Type	Integral Power	
Transmission	4-Speed Manual (SM 465)	
Shift Location	Floor	
Tires—Front	(2) LT235/85R16D (8PR)	(2) LT215/85R16D (8PR)
—Rear	(2) LT235/85R16E (10PR)	(4) LT215/85R16D (8PR)
Wheels	(4) Disc	(6) Disc
Size	16" x 6.5"	16" x 6.0"

♦CCA—Cold Cranking Amps

▲In addition to the standard equipment listed above, the C30/3500/C7C model also includes front suspension control arm reinforcements, air-assisted coil front springs, engine frame crossmember reinforcements, RPO U01 cab roof marker lamps and a 10,500-lb GVW rating.

GASOLINE**C/K CHASSIS-CAB—2-Wheel Drive****C30/3500 REGULAR CABS****STANDARD SPECIFICATIONS**

(See Gray Tab Section for Specification Details)

Series	C30/3500	AC30/3500/C7C
Engine		
Base Equipment	4.8 Liter, 292 l-bbl L6	5.7 Liter, 350 4-bbl V8
Clutch	11"; 124 sq. in.	12"; 150 sq. in.
Air Filter	Oiled-paper Element	
Oil Filter	Throwaway type	
Exhaust System	Single; Stainless Steel	*Dual; Stainless Steel
Emission Control Systems	See Engine & Cooling Section for specific model applications	
Suspension, Front	Independent	
Type	Coil Springs	Air Assisted Coil Springs
Capacity	3800 lb.	4000 lb.
Springs @ Ground	1900 lb. ea.	2000 lb. ea.
Shock Absorbers	32mm	
Suspension, Rear	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs	
Axle Capacity	7500 lb.	
Axle Ratio	4.10	4.56
Springs @ Ground	3500 lb. ea.	3750 lb. ea.
Shock Absorbers	32mm	
Brakes	Hydraulic; Self-adjusting	
Front	Disc; 12.5" rotor	
Rear	Drum; 13" x 3.5"	
Booster	Hydraulic Power	
Parking	Cable to Rear Wheels	
Electrical	12 Volt; Negative Ground	
Battery—Freedom Type	405 CCA ♦ @ 0°F.	
—Reserve Capacity	75 min. @ 80°F.	
Delcotron Generator	37 amp	66 amp
Frame	Carbon Steel; 36,-39,000 psi	
Section Modulus—131.5" WB.	6.14	
—135.5" 159.5" WB.	7.33	
Fuel Tank (Nominal Capacity)	20 gal.	
Steering Gear Type	Manual; Recirculating Ball Gear	
Linkage	Parallelogram	
Transmission	4-Speed Manual (SM 465).	
Shift Location	Floor	
Tires—Front	(2) LT235/85R16D (8PR)	(2) LT215/85R16D (8PR)
—Rear	(2) LT235/85R16E (10PR)	(4) LT215/85R16D (8PR)
Wheels	(4) Disc	(6) Disc
Size	16" x 6.5"	16" x 6.0"

*Single; Aluminized for California

♦CCA-Cold Cranking Amps

▲In addition to the standard equipment listed above, the C30/3500/C7C model also includes front suspension control arm reinforcements, air-assisted coil front springs, engine frame crossmember reinforcements, RPO U01 cab roof marker lamps and a 10,500-lb GVW rating.

C/K CHASSIS-CAB—2-Wheel Drive

C20/2500 REGULAR CABS

STANDARD SPECIFICATIONS

(See Gray Tab Section for Specification Details)

DIESEL

Series	C20/2500 Regular Cab
Engine Base Equip. Clutch Air Filter Oil Filter Oil Cooler Exhaust System Emission Control Systems	6.2 Liter, 379 Cu. In. V8 Diesel 12"; 150 sq. in. Poly wrapped, Oiled-paper Element Throwaway Type Standard Dual; Aluminized See Engine & Cooling Section for specific model applications
Suspension, Front Capacity Springs @ Ground Shock Absorbers Stabilizer Bar	Independent; Coil Springs 3800 lb. 1900 lb. ea. 32mm dia. 1.06" dia.
Suspension, Rear Axle Capacity Axle Ratio Springs, Main @ Ground Shock Absorbers	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs 6000 lb. 3.73 3000 lb. ea. 32mm dia.
Brakes Front Rear Booster Parking	Hydraulic; Self-adjusting Disc; 12.5" Rotor Drum; 13" x 2.5" Hydraulic Power Cable to Rear Wheels
Electrical Battery— Freedom Type —Reserve Capacity Delcotron Generator Engine Block Heater	12 Volt; Negative Ground Two; 550 CCA♦ ea. @ 0°F. 115 min. ea. @ 80°F. 66 amp. 600 watts, 120 volts
Frame Section Modulus	Carbon Steel; 36,- 39,000 psi 4.53
Fuel Tank (nominal capacity)	20 gal.
Steering Gear Type	Integral Power
Transmission Shift Location	4-Speed Manual (SM 465) Floor
Tires	Fr: (2) LT235/85R16D(8PR) Rr: (2) LT235/85R16E(10PR)
Wheels Size	(4) Disc 16" x 6.5"

♦CCA-Cold Cranking Amps

GASOLINE**C/K CHASSIS-CAB— 2-Wheel Drive****C20/2500 REGULAR CABS
STANDARD SPECIFICATIONS**

(See Gray Tab Section for Specification Details)


Series	C20/2500 Regular Cab
Engine	
Base Equip.	4.8 Liter, 292 i-bbl. L6
Clutch	11"; 124 sq. in.
Air Filter	Oiled-paper Element
Oil Filter	Throwaway Type
Exhaust System	Single; Stainless Steel
Emission Control Systems	See Engine & Cooling Section for specific model applications
Suspension, Front	Independent; Coil Springs
Capacity	3800 lb.
Springs @ Ground	1900 lb. ea.
Shock Absorbers	32mm dia.
Stabilizer Bar	1.06" dia.
Suspension, Rear	Salsbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs
Axle Capacity	6000 lb.
Axle Ratio	4.10
Springs, @ Ground	3000 lb. ea.
Shock Absorbers	32mm dia.
Brakes	Hydraulic; Self-adjusting
Front	Disc; 12.5" Rotor
Rear	Drum; 13" x 2.5"
Booster	Dual Diaphragm
Parking	Cable to Rear Wheels
Electrical	12 Volt; Negative Ground
Battery—	
Freedom Type	405 CCA♦ @ 0°F.
— Reserve Capacity	75 min. @ 80°F.
Delcotron Generator	37 amp.
Frame	Carbon Steel; 36,- 39,000 psi
Section Modulus	4.53
Fuel Tank (Nominal Capacity)	20 gal.
Steering Gear Type	Manual; Recirculating Ball Gear
Linkage	Parallelogram
Transmission	4-Speed Manual (SM 465)
Shift Location	Floor
Tires	Fr: (2) LT235/85R16D(8PR) Rr: (2) LT235/85R16E(10PR)
Wheels	(4) Disc
Size	16" x 6.5"

♦CCA-Cold Cranking Amps

C/K CHASSIS-CAB


CHASSIS-CAB MODEL SELECTOR

REGULAR CAB

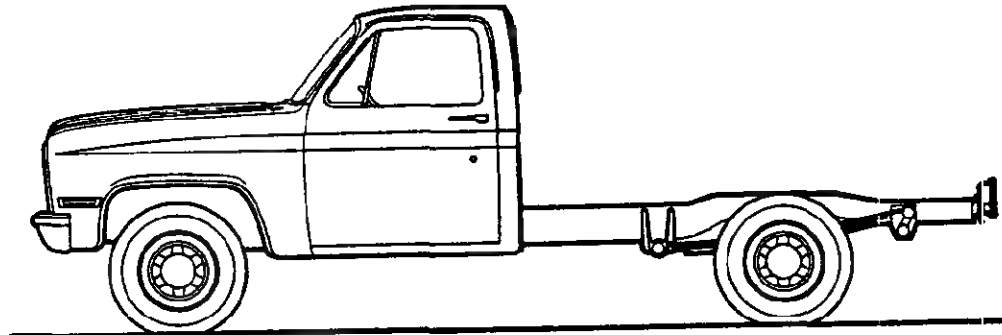

SERIES	MODEL NUMBER			BODY ORDERING CODE	
	131.5" WB (56" CA)	135.5" WB (60" CA)	159.5" WB (84" CA)	GASOLINE MODELS	DIESEL MODELS
C20/2500	C20903	—	—	ZW9	ZW9/B3J
C30/3500	C30903	C31003	C31403	ZW9	ZW9/B3J
C30/3500/C7C	—	C31003	C31403	ZW9/C7C	ZW9/C7C/B3J
K30/3500 (4x4)	K30903	K31003	K31403	ZW9	ZW9/B3J
K30/3500/C7E (4x4)	—	K31003	K31403	ZW9/C7E	ZW9/C7E/B3J

CREW CAB AND BONUS CAB

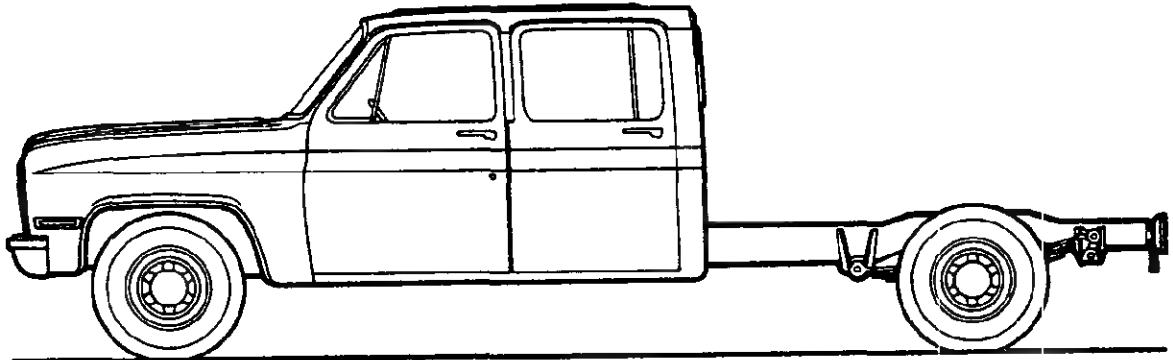


SERIES	MODEL NUMBER	BODY ORDERING CODE	
	164.5" WB (56" CA)	GASOLINE MODELS	DIESEL MODELS
C30/3500 Bonus Cab	C30943	ZW9/YG4	ZW9/YG4/B3J
C30/3500 Crew Cab	C30943	ZW9/AS3	ZW9/AS3/B3J
C30/3500/C7C Bonus Cab	C30943	ZW9/YG4	ZW9/YG4/B3J
C30/3500/C7C Crew Cab	C30943	ZW9/AS3	ZW9/AS3/B3J
K30/3500 Bonus Cab (4x4)	K30943	ZW9/YG4	ZW9/YG4/B3J
K30/3500 Crew Cab (4x4)	K30943	ZW9/AS3	ZW9/AS3/B3J
K30/3500/C7E Bonus Cab (4x4)	K30943	ZW9/YG4	ZW9/YG4/B3J
K30/3500/C7E Crew Cab (4x4)	K30943	ZW9/AS3	ZW9/AS3/B3J

NOTES

C/K PICKUP

VALUE DECOR PACKAGE

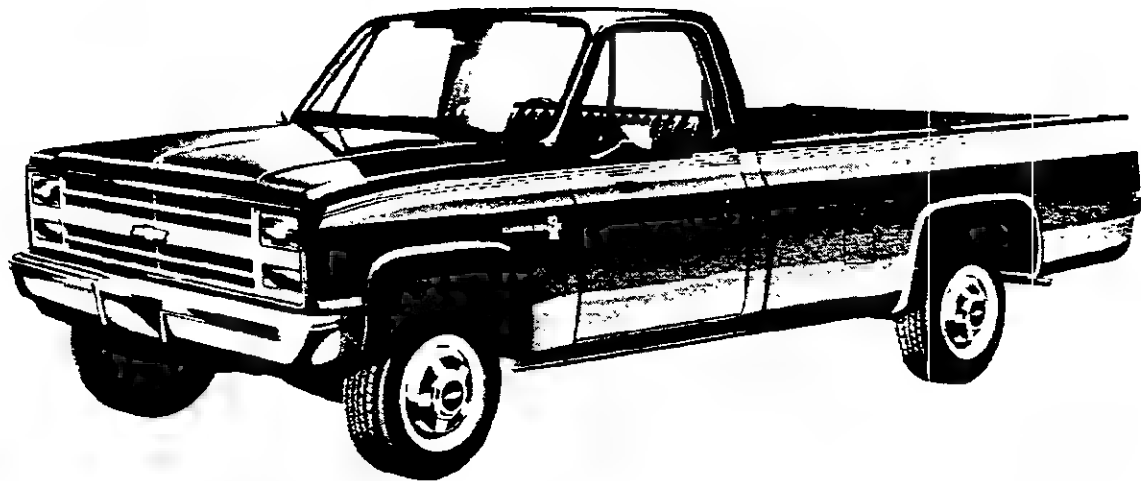

YJ6 VALUE DECOR PACKAGE (C/K Fleetside/Wideside Regular-Cab Pickups with single rear wheels only)

The Value Decor striping package is available in four colors, and requires ZY1 solid paint. See the chart below for color availability. The stripes are applied a few inches above the styling crease line on the front fenders, side doors and pickup box sides and tailgate. The bottom stripe is 1½" wide and the three upper ¼" stripes are separated by a ¼" clear space which allows the exterior paint color to show through between them. Includes a blacked-out grille and headlamp bezel treatment on all models and Rally wheels on C/K 10/1500 models. Not available with YE9 Silverado/Sierra Classic Trim, R05 Dual Rear Wheels or body side moldings.

YJ6 COLOR AVAILABILITY CHART

Exterior Color	Primary	Secondary	Available Stripe Colors			
			White 12A	Red 72A	Blue 29A	Black 19A
Black, Midnight	19	19	X	X		
Blue, Light (Metallic)	21	21	X		X	X
Blue, Midnight	29	29	X		X	
Bronze, Indian (Metallic)	66	66	X			
Copper, Canyon (Metallic)	55	55	X			X
Gold, Nevada (Metallic)	67	67	X	X		X
Gray, Steel (Metallic)	90	90	X	X	X	X
Red, Apple	72	72	X			X
Tan, Doeskin	61	61	X	X		X
White, Frost	12	12		X	X	X

C/K PICKUP

SOLID AND TWO-TONE* EXTERIOR COLOR COMBINATIONS


The application of paint for solid and two-tone exterior color combinations is shown below.

Exterior Decor Package (ZY5)

paint colors and trim are available only on single rear wheel Fleetside/Wideside pickup models (see Interior and Exterior Color Availability Chart). The package includes the moldings described under Special Two-Tone. In addition, it includes dual-tone body side and rear tape decal striping keyed to the exterior body color. This striping is applied to the front fenders, side doors and pickup box sides and tailgate a few inches above the styling crease line.

The areas above the striping and below the moldings are painted color code 1. Color code 2 is used between the striping and the molding. A bright spring-loaded, stand-up type hood ornament is included on gasoline engine models.

When used with the Silverado/Sierra Classic Model Option, the cab back panel applique and molding included with this model is deleted.

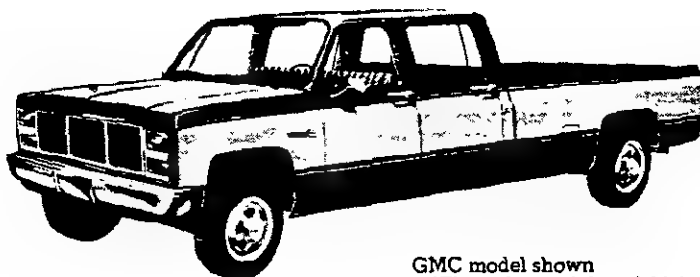


GMC model shown
(Chevrolet model available)

Special Big Dooley two-tone (ZY9)


paint colors are available only on Fleetside/Wideside Pickup models with dual rear wheels (see Interior and Exterior Color Availability Chart). The package includes dual-tone body side and rear tape decal striping keyed to the exterior body color. This striping is applied to the front fenders, side doors and pickup box sides and tailgate a few inches above the styling crease line.

The areas above the striping are painted color code 1, and the areas below are painted color code 2. A bright, spring-loaded, stand-up type hood ornament is included on gasoline engine models. Bright trim for front side marker lamps, rear wheel opening extension clearance lamps, and tail lamps also is included for standard Custom Deluxe/Sierra models.

When used with the Silverado/Sierra Classic Model Option, the cab back panel applique and molding included with this model is deleted.

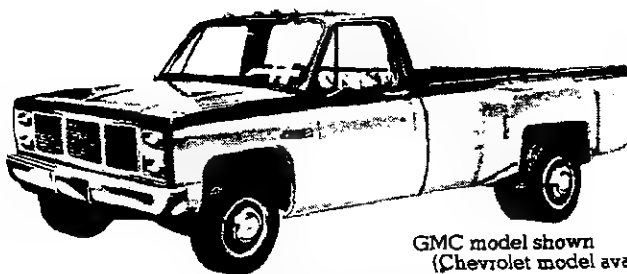

GMC model shown
(Chevrolet model available)

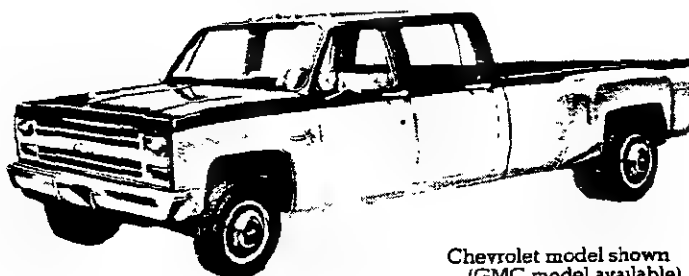

Chevrolet model shown
(GMC model available)

*Optional at extra cost

C/K PICKUP


SOLID AND TWO-TONE* EXTERIOR COLOR COMBINATIONS

The application of paint for solid and two-tone exterior color combinations is shown below.

Deluxe two-tone (ZY4) paint colors are available only on single rear wheel Fleetside/Wideside Pickup models and include the YG1 molding package consisting of black vinyl body side and rear moldings with bright trim, bright wheel opening moldings, and bright trim for front side marker lights and tail lights (except with the YG3 molding package or the Silverado/Sierra Classic Model Option where bright body side and rear moldings with black paint trim are substituted). Also includes cab back panel applique and molding (except with Silverado/Sierra Classic Model Option where it is included). The cab roof, cab back panel above the belt line, and the area below the moldings are painted color code 1 with color code 2 applied on all other areas. A white decal is applied to the raised "Chevrolet/GMC" lettering on the tailgate, except when color code 1 is Frost White, then a black decal is applied. (A bright trim plate covers the lettering when the Silverado/Sierra Classic Model Option is ordered.)



GMC model shown
(Chevrolet model available)

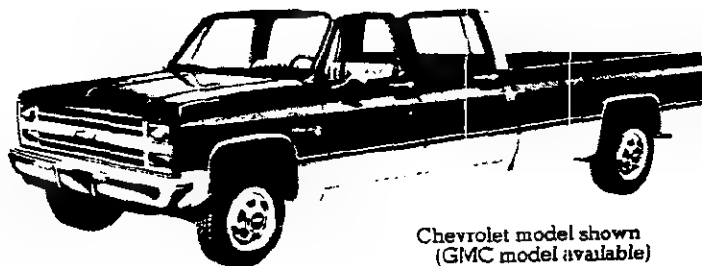

Chevrolet model shown
(GMC model available)


*Optional at extra cost

C/K PICKUP

SOLID AND TWO-TONE* EXTERIOR COLOR COMBINATIONS


The application of paint for solid and two-tone exterior color combinations is shown below.

Solid color paint (ZY1) is standard on all models. All painted areas of the cab, front end sheet metal, and box are the same color. A white decal is applied to the raised "Chevrolet/GMC" lettering on the tailgate, except with Frost White, then a black decal is applied. (A bright trim plate covers the lettering on Fleetside/Wideside models when the Silverado/Sierra Classic Model Option is ordered.)

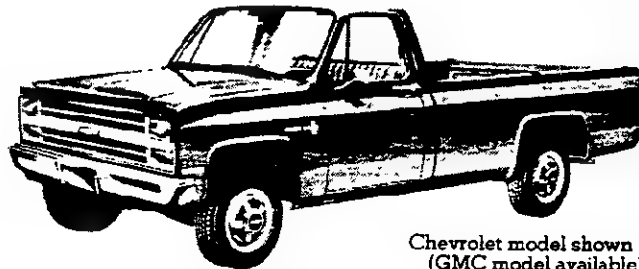


Chevrolet model shown
(GMC model available)

Conventional two-tone (ZY2) consists of color code 1 on cab roof and cab back panel above the belt line, with color code 2 on the remainder of the cab, on the front end sheet metal, and on the pickup box. A white decal is applied to the raised "Chevrolet/GMC" lettering on the tailgate, except when color code 1 is Frost White, then a black decal is applied. (A bright trim plate covers the lettering on Fleetside/Wideside models when the Silverado/Sierra Classic Model Option is ordered.) Includes cab back panel applique and molding, except with the Silverado/Sierra Classic Model Option where it is already included.

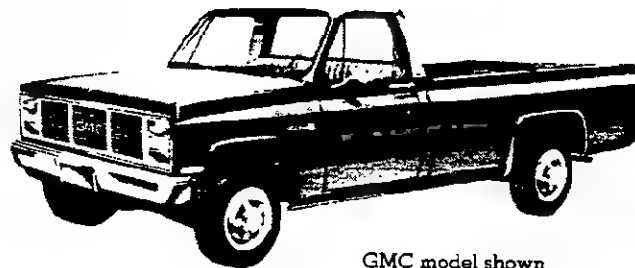

GMC model shown
(Chevrolet model available)

Special two-tone (ZY3) paint colors are available only on single rear wheel Fleetside/Wideside Pickup models and include the YG1 molding package consisting of black vinyl body side and rear moldings with bright trim, bright wheel opening moldings, and bright trim for front side marker lights and tail lights (except with the YG3 molding package or the Silverado/Sierra Classic Model Option where bright body side and rear moldings with black paint trim are substituted). Color code 1 is applied to the areas above the moldings (including the cab roof). Color code 2 is applied to the areas below the moldings. A white decal is applied to the raised "Chevrolet/GMC" lettering on the tailgate, except when color code 1 is Frost White, then a black decal is applied. (A bright trim plate covers the lettering when the Silverado/Sierra Classic Model Option is ordered.)

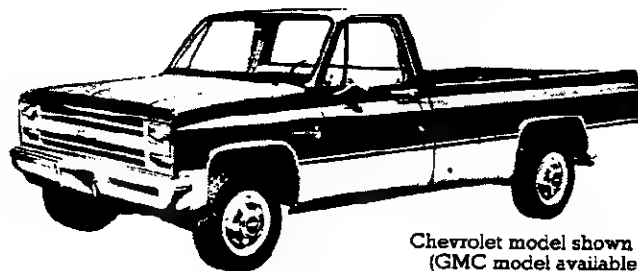

Chevrolet model shown
(GMC model available)



GMC model shown
(Chevrolet model available)

C/K BONUS & CREW CAB PICKUP

INTERIOR AND EXTERIOR COLOR AVAILABILITY CHART

Please Note: Below are the interior trim color and exterior paint combinations recommended by Chevrolet/GMC. The only available color code 1/color code 2 exterior color combinations are those shown in the chart below; however, any available interior trim color may be ordered with one of these exterior color combinations if that particular combination is desired by the customer.

INTERIOR COLORS			Decor	Blue	Burgundy	Saddle Tan
CUSTOM DELUXE/SIERRA Vinyl Bench Seat			Std	VDD1	VFE1	VSS1
SCOTTSDALE/HIGH SIERRA Vinyl Bench Seat			Z62	VDD1	VEE1	VSS1
Custom Vinyl Bench Seat				XDD1	XEE1	XSS1
Custom Cloth Bench Seat				LDD1	LEE1	LSS1
SILVERADO/SIERRA CLASSIC Custom Vinyl Bench Seat			YE9	XDD1	XEE1	XSS1
Custom Cloth Bench Seat				LDD1	LEE1	LSS1
EXTERIOR COLORS w/ZY1, ZY2, ZY3, ZY4 PAINT	Two-Tone Available	Color Code 1	Color Code 2	RECOMMENDED INTERIOR TRIM COLOR		
BLACK, MIDNIGHT		19	19		X	X
Copper Canyon (Metallic)	ZY2, ZY4 only	19	55			X
Gold, Nevada (Metallic)	ZY2, ZY4 only	19	67			X
Tan, Doeskin	All	19	61			X
White, Frost	ZY2, ZY4 only	19	12		X	
BLUE, LIGHT (Metallic)		21	21	X		
Blue, Midnight	ZY3 only	21	29	X		
Gray Steel (Metallic)	ZY3 only	21	90	X		
White, Frost	ZY3 only	21	12	X		
BLUE, MIDNIGHT		29	29	X		
Blue, Light (Metallic)	ZY2, ZY4 only	29	21	X		
Gray, Steel (Metallic)	All	29	90	X		
White, Frost	All	29	12	X		
BRONZE, INDIAN (Metallic)		66	66			X
Tan, Doeskin	ZY3 only	66	61			X
White, Frost	ZY3 only	66	12			X
COPPER, CANYON (Metallic)		55	55			X
Black, Midnight	ZY3 only	55	19			X
Tan, Doeskin	ZY3 only	55	61			X
White, Frost	ZY3 only	55	12			X
GOLD, NEVADA (Metallic)		67	67			X
Black, Midnight	ZY3 only	67	19			X
Tan, Doeskin	ZY3 only	67	61			X
White, Frost	ZY3 only	67	12			X
GRAY, STEEL (Metallic)		90	90	X	X	
Blue, Light (Metallic)	ZY2, ZY4 only	90	21	X		
Blue, Midnight	All	90	29	X		
Red, Apple	ZY2, ZY4 only	90	72		X	
RED, APPLE		72	72		X	X
Gray, Steel (Metallic)	ZY3 only	72	90		X	
Tan, Doeskin	ZY3 only	72	61		X	X
White, Frost	All	72	12		X	
TAN, DOESKIN		61	61			X
Black, Midnight	All	61	19			X
Bronze, Indian (Metallic)	ZY2, ZY4 only	61	66			X
Copper Canyon (Metallic)	ZY2, ZY4 only	61	55			X
Gold, Nevada (Metallic)	ZY2, ZY4 only	61	67			X
Red, Apple	ZY2, ZY4 only	61	72		X	X
White, Frost	All	61	12			X
WHITE, FROST		12	12	X	X	X
Black, Midnight	ZY3 only	12	19		X	
Blue, Light (Metallic)	ZY2, ZY4 only	12	21	X		
Blue, Midnight	All	12	29	X		
Bronze, Indian (Metallic)	ZY2, ZY4 only	12	66			X
Copper Canyon (Metallic)	ZY2, ZY4 only	12	55			X
Gold, Nevada (Metallic)	ZY2, ZY4 only	12	67			X
Red, Apple	All	12	72		X	
Tan, Doeskin	All	12	61			X
*w/ZY5 or ZY9 PAINT (Interior & Exterior Combinations Shown are the Only Combinations Available)				STRIPE COLOR		
BLACK, MIDNIGHT/Gray Steel (Metallic)	19	90		X		Vermilion/Black
BLACK, MIDNIGHT/Tan, Doeskin	19	61		X	X	Vermilion/Black
BLUE, LIGHT (Metallic)/Blue, Midnight	21	29	X			Light Blue/Dark Blue
BLUE, LIGHT (Metallic)/Gray Steel (Metallic)	21	90	X			Dark Blue/Light Slate
BLUE, LIGHT (Metallic)/White, Frost	21	12	X			Dark Blue/Light Slate
BLUE, MIDNIGHT/Gray Steel (Metallic)	29	90	X			Vermilion/Light Slate
BRONZE, INDIAN (Metallic)/Tan, Doeskin	66	61			X	Almond/Dark Brown
COPPER, CANYON (Metallic)/Tan, Doeskin	55	61			X	Dark Brown/Almond
COPPER, CANYON (Metallic)/White, Frost	55	12			X	Almond/Dark Brown
GRAY, STEEL (Metallic)/Black, Midnight	90	19		X		Vermilion/Black
GRAY, STEEL (Metallic)/Blue, Midnight	90	29	X			Light Blue/Dark Blue
GRAY, STEEL (Metallic)/Red, Apple	90	72		X		Vermilion/Black
RED, APPLE/Black, Midnight	72	19		X		Vermilion/Black
RED, APPLE/Tan, Doeskin	72	61		X	X	Vermilion/Dark Carmine
RED, APPLE/White, Frost	72	12		X		Vermilion/Black
TAN, DOESKIN/Black, Midnight	61	19			X	Vermilion/Black
TAN, DOESKIN/Red, Apple	61	72			X	Vermilion/Dark Carmine

*ZY5 Paint not available with RO5 Dual Rear Wheels. ZY9 Paint requires RO5 Dual Rear Wheels

C/K REGULAR CAB PICKUP

INTERIOR AND EXTERIOR COLOR AVAILABILITY CHART

Please Note: Below are the interior trim color and exterior paint combinations recommended by Chevrolet/GMC. The only available color code 1/color code 2 exterior color combinations are those shown in the chart below; however, any available interior trim color may be ordered with one of these exterior color combinations if that particular combination is desired by the customer.


INTERIOR COLORS		Decor	Blue	Burgundy	Charcoal	Malogany	Saddle Tan
CUSTOM DELUXE/SIERRA							
Vinyl Bench Seat		Std	VDD1	VFF1	VJJ1	VNN1	VSS1
Deluxe Cloth Bench Seat			CDD1	CEE1	CJJ1	CNN1	CSS1
Custom Vinyl Bench Seat			XDD1	XEE1	XJJ1	XNN1	XSS1
SCOTTSDALE/HIGH SIERRA							
Deluxe Cloth Bench Seat		Z62	CDD1	CEE1	CJJ1	CNN1	CSS1
Custom Vinyl Bench Seat			XDD1	XEE1	XJJ1	XNN1	XSS1
SILVERADO/SIERRA CLASSIC							
Custom Vinyl Bench Seat		YE9	XDD1	XEE1	XJJ1	XNN1	XSS1
Custom Cloth Bench Seat			LDD1	LEE1	LJJ1	LNN1	LSS1
EXTERIOR COLORS		Two-Tone Available	Color Code 1	Color Code 2	RECOMMENDED INTERIOR TRIM COLOR		
W/ZY1, ZY2, ZY3, ZY4 PAINT							
BLACK MIDNIGHT			19	10		X	X
Copper Canyon (Metallic)	ZY2 ZY4 only	19	55			X	X
Gold Nevada (Metallic)	ZY2 ZY4 only	19	67			X	X
Gray Steel (Metallic)	All	19	90			X	X
Tan Doeskin	All	19	61			X	X
White Frost	All	19	12			X	X
BLUE LIGHT (Metallic)			21	21		X	X
Blue Midnight	ZY3 only	21	29			X	X
Gray Steel (Metallic)	ZY3 only	21	90			X	X
White Frost	ZY3 only	21	12			X	X
BLUE MIDNIGHT			29	29		X	X
Blue Light (Metallic)	ZY2 ZY4 only	29	21			X	X
Gray Steel (Metallic)	All	29	90			X	X
White Frost	All	29	12			X	X
BRONZE INDIAN (Metallic)			66	66		X	X
Tan Doeskin	ZY3 only	66	61			X	X
White Frost	ZY3 only	66	12			X	X
COPPER CANYON (Metallic)			55	55		X	X
Black Midnight	ZY3 only	55	19			X	X
Tan Doeskin	ZY3 only	55	61			X	X
White Frost	ZY3 only	55	12			X	X
GOLD NEVADA (Metallic)			67	67		X	X
Black Midnight	ZY3 only	67	19			X	X
Tan Doeskin	ZY3 only	67	61			X	X
White Frost	ZY3 only	67	12			X	X
GRAY STEEL (Metallic)			90	90		X	X
Black Midnight	All	90	19			X	X
Blue Light (Metallic)	ZY2 ZY4 only	90	21			X	X
Blue Midnight	All	90	29			X	X
Red Apple	All	90	72			X	X
White Frost	ZY3 only	90	12			X	X
RED APPLE			72	72		X	X
Gray Steel (Metallic)	All	72	90			X	X
Tan Doeskin	ZY3 only	72	61			X	X
White Frost	All	72	12			X	X
TAN DOESKIN			61	61		X	X
Black Midnight	All	61	19			X	X
Bronze Indian (Metallic)	ZY2 ZY4 only	61	66			X	X
Copper Canyon (Metallic)	ZY2 ZY4 only	61	55			X	X
Gold Nevada (Metallic)	ZY2 ZY4 only	61	67			X	X
Red Apple	ZY2 ZY4 only	61	72			X	X
White Frost	All	61	12			X	X
WHITE FROST			12	12		X	X
Black Midnight	All	12	19			X	X
Blue Light (Metallic)	ZY2 ZY4 only	12	21			X	X
Blue Midnight	All	12	29			X	X
Bronze Indian (Metallic)	ZY2 ZY4 only	12	66			X	X
Copper Canyon (Metallic)	ZY2 ZY4 only	12	55			X	X
Gold Nevada (Metallic)	ZY2 ZY4 only	12	67			X	X
Gray Steel (Metallic)	ZY2 ZY4 only	12	90			X	X
Red Apple	All	12	72			X	X
Tan Doeskin	All	12	61			X	X
*W/ZY5 or ZY9 PAINT (Interior & Exterior Combinations Shown are the Only Combinations Available)							
BLACK MIDNIGHT/Gray Steel (Metallic)	19	90		X	X		Vermilion/Black
BLACK MIDNIGHT/Tan Doeskin	19	61		X	X		Vermilion/Black
BLUE LIGHT (Metallic)/Blue Midnight	21	29	X				Light Blue/Dark Blue
BLUE LIGHT (Metallic)/Gray Steel (Metallic)	21	90	X				Dark Blue/Light Slate
BLUE LIGHT (Metallic)/White Frost	21	12	X				Dark Blue/White
BLUE MIDNIGHT/Gray Steel (Metallic)	29	90	X				Vermilion/Light Slate
BRONZE INDIAN (Metallic)/Tan Doeskin	66	61				X	Almond/Dark Brown
COPPER CANYON (Metallic)/Tan Doeskin	55	61				X	Almond/Dark Brown
COPPER CANYON (Metallic)/White Frost	55	12				X	Almond/Dark Brown
RED APPLE/Black Midnight	72	19		X	X		Vermilion/Black
RED APPLE/Tan Doeskin	72	61		X	X		Vermilion/Dark Carmine
RED APPLE/White Frost	72	12		X	X		Vermilion/Black
GRAY STEEL (Metallic)/Black Midnight	90	19		X	X		Vermilion/Black
GRAY STEEL (Metallic)/Blue Midnight	90	29	X				Light Blue/Dark Blue
GRAY STEEL (Metallic)/Red Apple	90	72		X	X		Vermilion/Black
TAN DOESKIN/Black Midnight	61	19				X	Vermilion/Black
TAN DOESKIN/Red Apple	61	72				X	Vermilion/Dark Carmine

*ZY5 Paint not available with RO5 Dual Rear Wheels. ZY9 Paint requires RO5 Dual Rear Wheels.


C/K PICKUP STEPSIDE/FENDERSIDE PICKUP BOX

Body Ordering Code E62
DIMENSIONS

Stake Pocket Locations

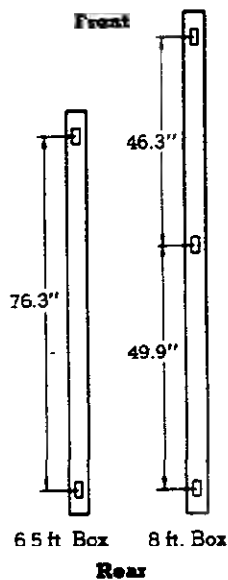

Stake Pocket Dimensions
Front & rear: 2" x 1.38" x 6" deep
Center (8 ft. box only) 2" x 1.38" x 1.8" deep

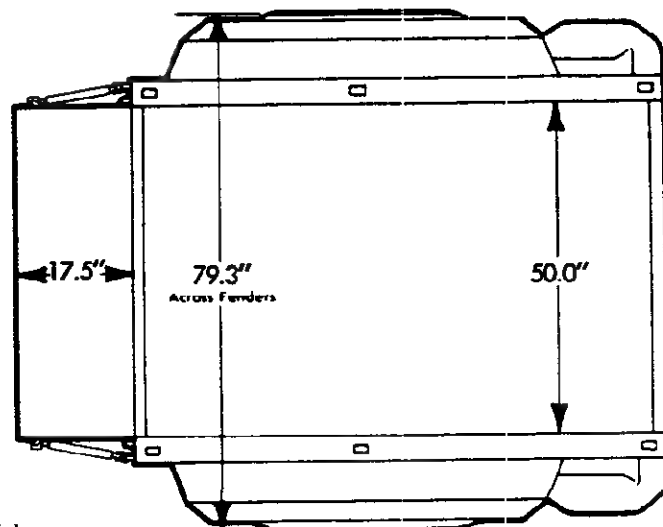

Body Sizes		
Model	Body Length Inside	Volume
C10703 K10703	78.4"	39.7 cu ft
C20903 C30903 K20903	98.3"	49.8 cu ft

The smooth interior walls of the Stepside/Fenderside pickups are a full 50 inches apart, allowing 4-ft-width materials to be carried easily. In fact, with the 98" body, 4' x 8' sheets can be carried without lowering the tailgate.

Floors are constructed of kiln-dried, sealed wood boards with seven flush steel skid strips bolted in place over the expansion joints. A tight-fitting full-width tailgate minimizes loss of bulk loads such as grain or sand. With the tailgate closed, the wedge-type anti-rattle latches give extra support to the side panels. When open, the tailgate is supported by two strong vinyl covered chains.

On each side of the body, Stepside/Fenderside pickups have a running board and step just forward of the fender. This step is a great convenience in jobs requiring frequent

working of the load from the side.

Reinforced pockets (2" x 1.38") for the addition of stake racks are provided to increase the bulk carrying capacity of the box. On 6.5 ft. bodies there are 2 pockets on each side and on 8 ft. bodies there are 3 pockets on each side. See the diagram at left above for location of these stake pockets.


Side panels, tailgate, and front panel are fabricated of 2-side galvanized steel as are the platform cross sills and skid strips.

All metal body panels are primed for corrosion protection, and the Elpo electrocoating process is used to prime the side panels, tailgate, and front panel to assure that all surfaces of these more complicated components—even surfaces not visible—receive a coat of prime paint.




Convenient Side Step

A convenient running board and step on each side of the body facilitates working of cargo from the side.

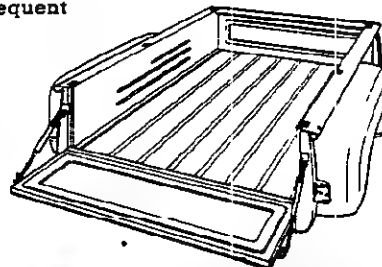

Steel Skid Strips

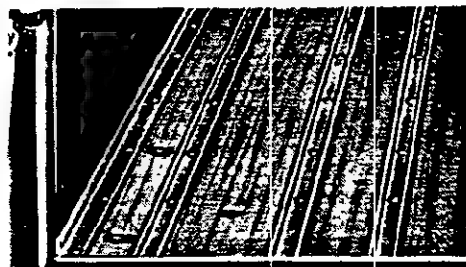



Seven flush steel skid strips hold floor planks securely, yet allow expansion with changes in temperature and humidity. Recessed bolt heads prevent cargo damage in loading and unloading.

C/K PICKUP FLEETSIDE/WIDESIDE PICKUP BOX


SINGLE REAR WHEEL APPLICATION

Body Ordering Code E63

DIMENSIONS

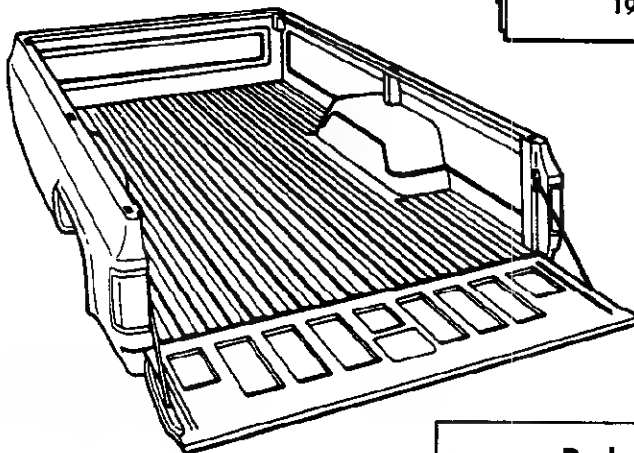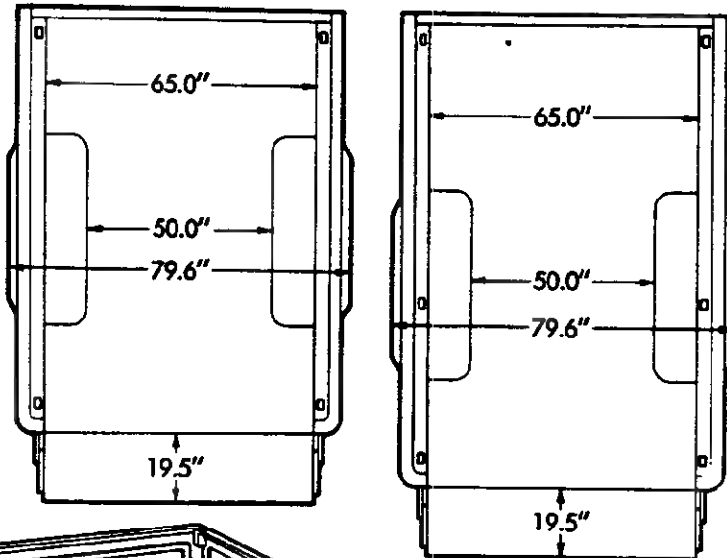

Stake Pocket Locations

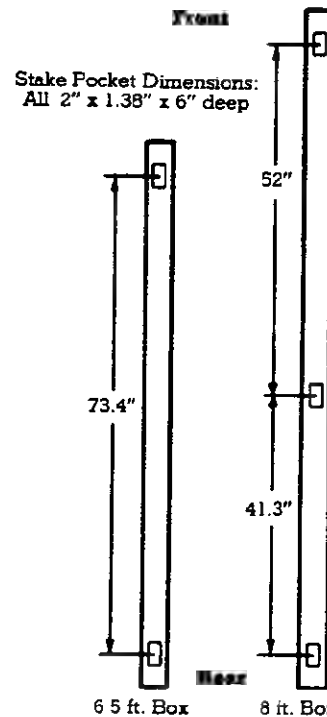

Fleetside/Wideside pickup boxes feature double-walled construction in the side panels and tailgate to prevent load dents from marring the appearance of the outer panels.

All metal body panels are primed for corrosion protection, and the Elpo electro-coating process is used to prime the side panels, tailgate, floor panel, and front panel to assure that all surfaces of these more complicated components—even surfaces not visible—receive a coat of prime paint. Side outer panels and tailgate are fabricated of zinc coated steel and galvanized steel is used for stake pockets, platform panels, and rear wheel housings to provide additional corrosion protection.

A tight-fitting full-width tailgate holds such loads as grain and sand with minimal loss. It is operated by a mechanically actuated latch and retained in the horizontal position by hinged steel support straps. A quick-release feature allows it to be quickly and easily removed and re-installed by one person. The tailgate latch features one-hand operation for easy opening and closing.

Reinforced pockets (2" x 1.38") for the addition of stake racks are provided to increase the bulk carrying capacity of the box. On 6.5 ft. bodies there are two pockets on each side; on 8 ft. bodies there are three pockets on each side. See the diagram at right above for location of these stake pockets.

Body Sizes

Model	Body Length Inside	Volume
C10703 K10703	78.2"	58.4 cu ft
C10903 C20903 C20943 K10903 K20903 K30903 C30903 C30943 K30943	98.1"	74.3 cu ft




Steel Floor

C/K PICKUP FLEETSIDE/WIDESIDE PICKUP BOX


DUAL REAR WHEEL APPLICATION

Body Ordering Code E63

DIMENSIONS

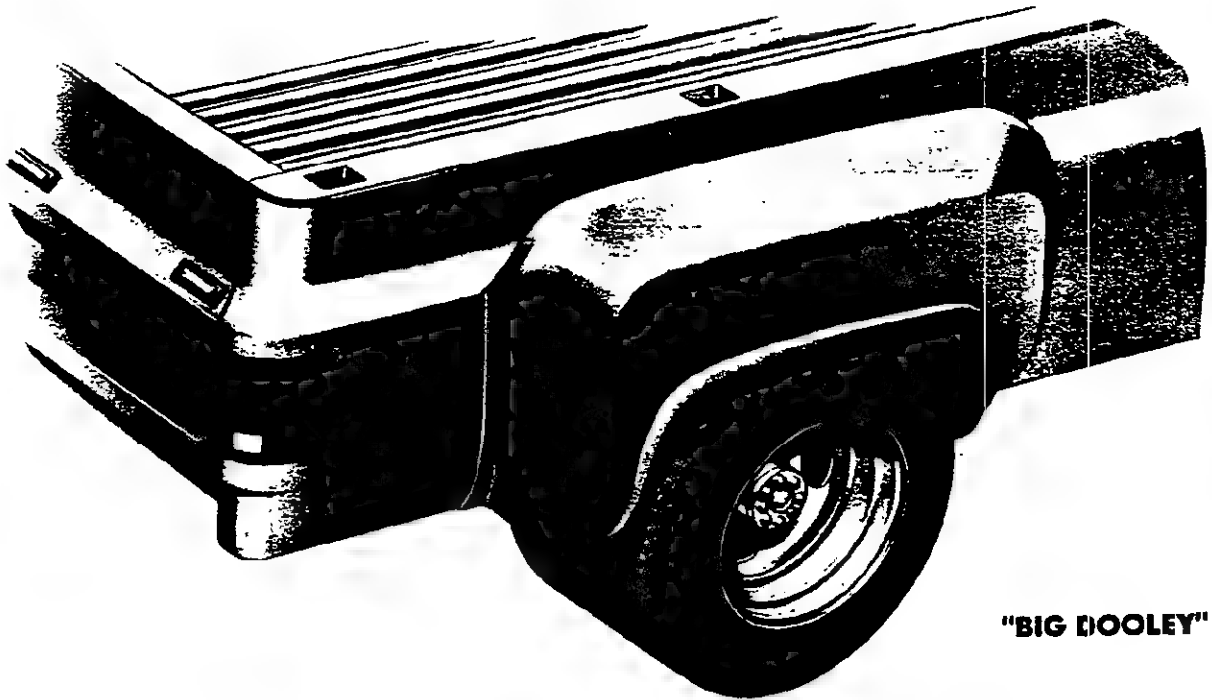

"BIG DOOLEY"

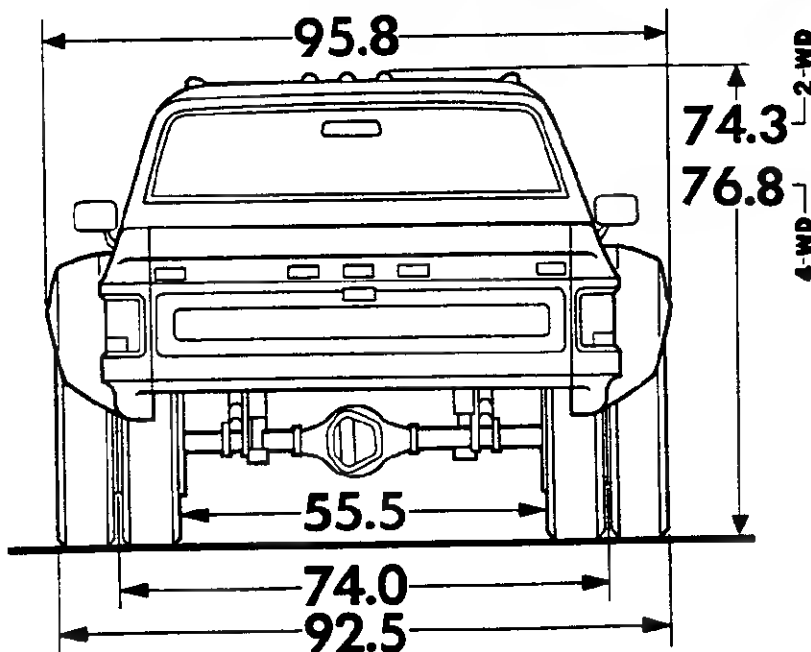




The 8-foot Fleetside/Wideside Pickup Box for dual rear wheel application offers all the features described for single rear wheel application. Additionally, it includes one-piece fenders constructed of fiberglass reinforced plastic bolted to each rear wheelhousing area. This provides an extension to cover the dual rear wheel equipment. Clearance lights are located fore and aft of the wheel openings on the fender extensions. Installation also includes five amber clearance and identification lights mounted on the cab roof along with five red rear clearance and identification lamps mounted on the tailgate (except on Series K30/3500 models where they are standard).

Fleetside/Wideside Pickup Box (Code E63) and dual rear wheels (RPO R05) are available only on models C30903, K30903, C30943, or K30943.

Dana wider track rear axle used when dual rear wheels are ordered on Fleetside/Wideside pickups.



C/K PICKUP

CAB DIMENSIONS*

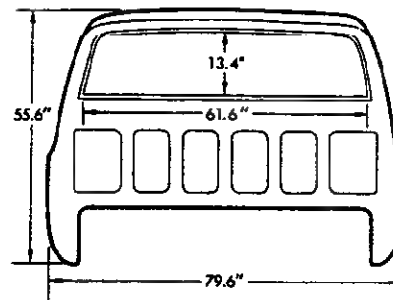


Glass Area (sq. in.)

Windshield.....	1421	Rear side door window (each side) on Crew Cab including fixed window. 488
Front side door window (each side) including ventipanes	470	Rear window 771Δ
		Δ675 sq. in. with sliding rear window.

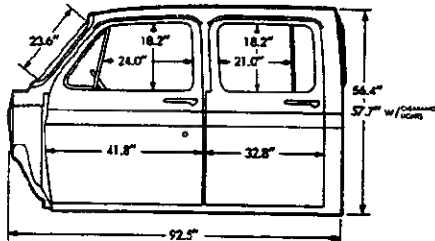

(Crew Cab model)

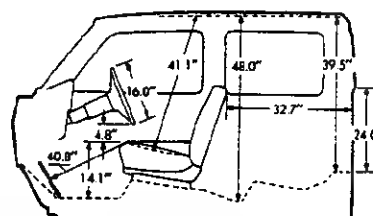


(Bonus Cab model)

*All interior dimensions measured with front seat in rearmost position. Seat travel is 5".


INSTRUMENT CLUSTERS

Standard Cluster with warning lights for engine temperature, generator, and oil pressure. Diesel engine models will also have warning lights for glow plugs, low coolant and water-in-fuel (or fuel filter).

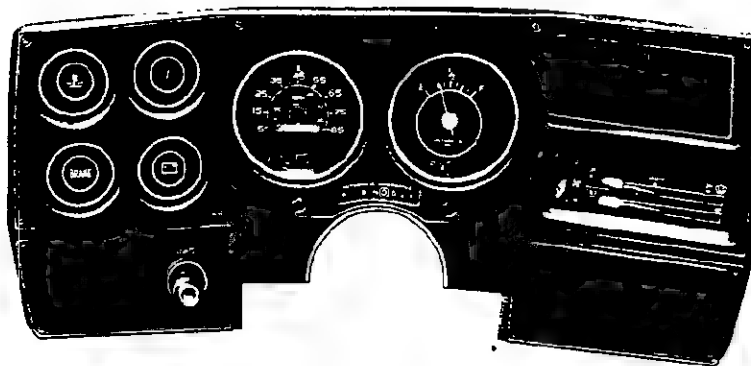


Optional Cluster (RPO Z53) with volt-meter, engine temperature gage, and oil pressure gage. Included in Silverado/Sierra Classic model option (RPO YE9) along with bright brush-finished trim, as illustrated. Cluster faceplate for Custom Deluxe/Sierra (Std.) models has black crackle finish. An electric clock (RPO U35), shown at lower left, is available for use with the optional cluster.

Optional air conditioning outlets and radio also shown in illustration.

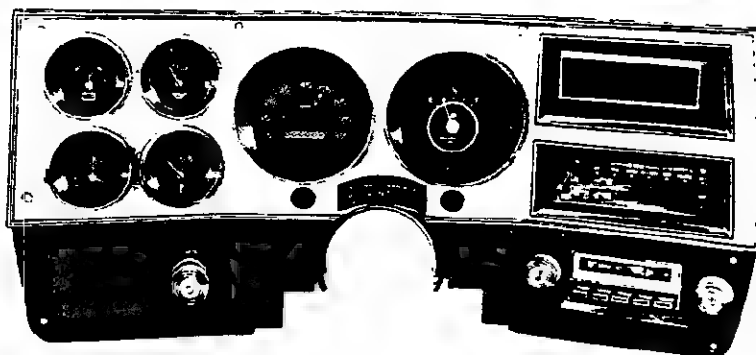

C/K PICKUP

STANDARD CAB FEATURES

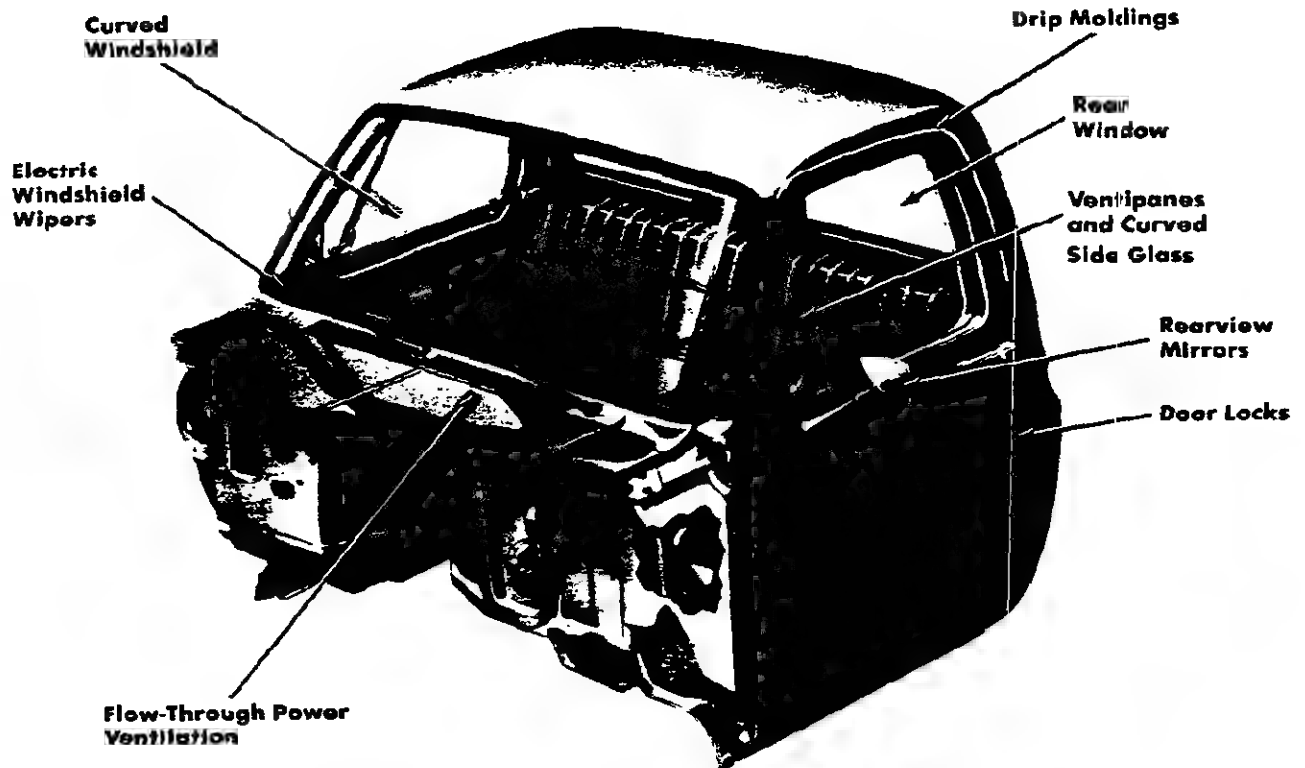

Curved Windshield—The large, one-piece windshield of laminated safety glass has an area of approximately 1447 square inches for excellent visibility.

Rear Window—The rear window is of solid safety glass with a 790 square inch area.

Electric Windshield Wipers—High-capacity, 2-speed motor provides constant wiping action regardless of engine load or accelerator position. Wipers have 16-inch blades. Wiper arms and the metal portions of the blades have a black finish. Electric washers with a 3-pint capacity reservoir are also standard. Dual on/off washer nozzles assure efficient washing action.

Drip Moldings—Bright metal moldings over side doors.

Flow-Through Power Ventilation—With ignition switch on and heater fan switch on, outside air enters the cab through the louvers in the cowl air intake grille between the hood and the windshield—away from road

dust, heat and fumes. The air passes through screened inlets into a plenum chamber built into the cowl, where water is separated from the air and drained out. Air enters the driver compartment through the heater (or optional air conditioning) system and exits through a pressure relief valve in each door. Additional air may be admitted into the interior through two inlets—one on the right side (except with optional air conditioning) and one on the left side of the lower cowl structure. Inlet valves are operated by levers integral with the inlet assemblies.

Ventipanes and Curved Side Glass—Additional flow of outside air can be controlled by a pivot-type ventipane in each front door. Friction-type latches with push-button locks and smoothly contoured handles assure excellent sealing and security. Ventipanes, as well as curved door windows, are of solid safety glass with an area of 546 square inches for each side. (Crew Cab and Bonus Cab rear side door glass area—488

sq. in. each.)

Rearview Mirrors—Standard chrome exterior mirrors are of the fixed arm type with 5-7/16" wide x 4" high adjustable heads. Both right-hand and left-hand units are provided.


Many optional mirror combinations are also available. See the Optional Equipment listing for each model.

Door Locks—All cab models include left & right hand key-operated (front) door locks as standard equipment. Depression of inside pushbuttons prevents accidental front and rear door opening and provides keyless front door locking when leaving the vehicle. Door lock key is separate from the ignition key for theft protection.

Identification and Clearance Lights—All models with second unit bodies 80" wide or over, or models with dual rear wheels, are equipped with cab identification and clearance lights. See individual model specification pages.

C/K PICKUP


CAB CONSTRUCTION

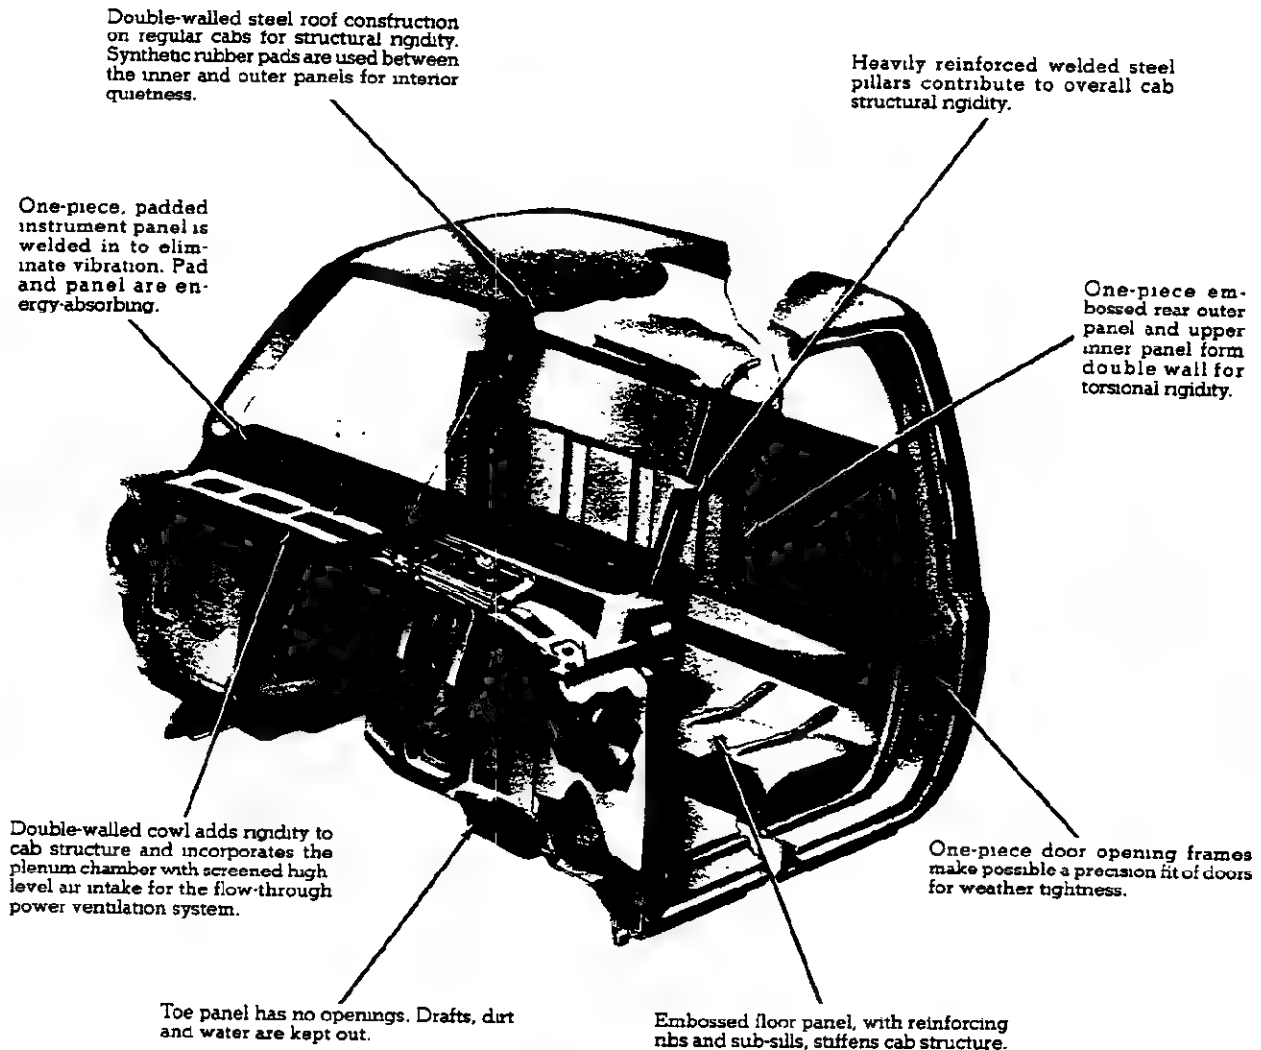

CAB MOUNTINGS


Typical Cab Mount shown.

Both front and rear cab mounts used are the compression-rebound type for quietness and durability



C/K PICKUP

PICKUP SEAT

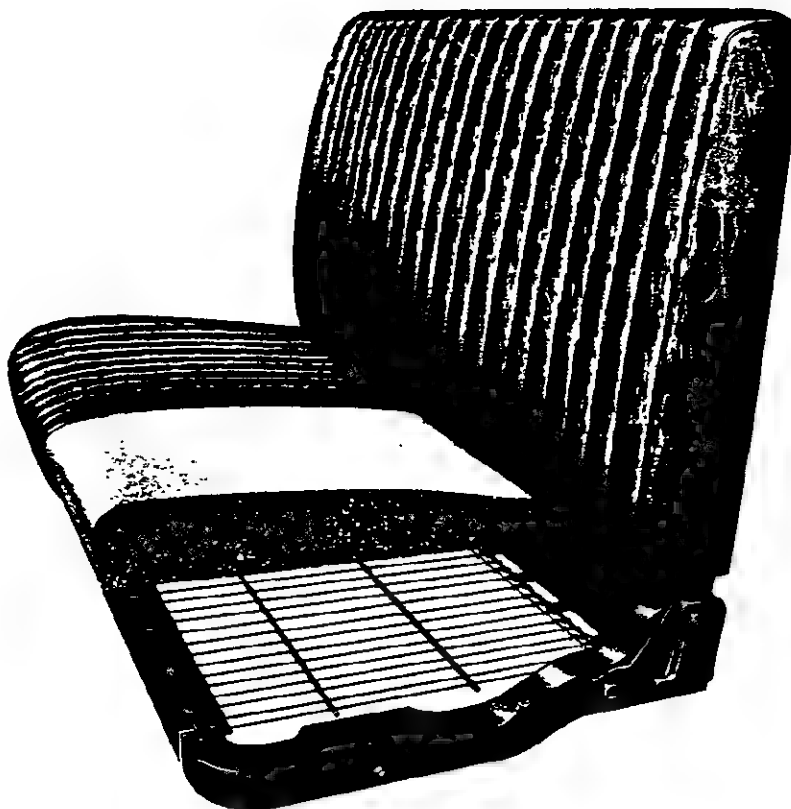

STANDARD FULL-DEPTH FOAM SEAT

Molded polyurethane foam pads over a steel cushion spring and frame assembly and a backrest frame assembly provide resilient support for driver and passengers, with an extra-thick pad employed for the cushion. A folding type backrest with inertia latch is used for the Regular Cab front seat and Crew Cab rear seat, providing convenient access to the stowage area behind the seat. Front seats are adjustable fore and aft. Trim is durable, easy-to-clean vinyl.

C/K PICKUP

SILVERADO/SIERRA CLASSIC MODEL OPTION—RPO YE9 (FOR CREW CAB AND BONUS CAB MODELS)

This option includes all items in the Scottsdale/High Sierra model option plus the additions or substitutions listed below



Chevrolet model shown (GMC model available)

EXTERIOR

- **Bright Appearance Items:**

- "Silverado/Sierra Classic" nameplates, with series designation, on front fenders
- Cab back panel applique molding
- "Chevrolet/GMC letters" nameplate on tailgate applique panel
- Chrome-trimmed grille (Chevrolet models only)
- Body side and rear moldings with black paint trim (models with single rear wheels only)
- Wheel-opening lip moldings with black paint trim (models with single rear wheels only)


Bright applique panel fitted over central area of tailgate with black-trimmed decorative border

- **Cab-to-Fender Insulators**

- **Grille and Headlamp Bezel Paint:** Dark argent (Chevrolet); argent/dark argent (GMC)

- **Hood Insulator**

- **Special Headlamps:** Rectangular, dual RH and LH

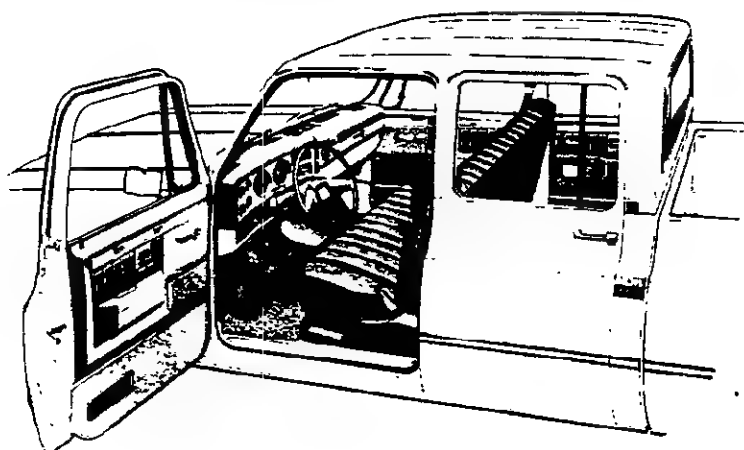

INTERIOR

- **Bright Appearance Items:**

- "Silverado/Sierra Classic" nameplate on instrument panel pad
- MM4 four-speed transmission shift lever (C2-3 models)
- Trim on door trim panels and horn button

- **Cowl Panel Trim:** Color-keyed molded plastic on entire surface of cowl side panels

- **Door Trim Panels:** Special color-keyed molded plastic with pewter-toned brush-finished upper decorative inserts having bright, black, and silver borders; cloth inserts in armrest area; vinyl storage pockets and door closing assist straps (on front units only), plus carpeting and bright trim strips on lower portions

- **Floor Covering:** Color keyed carpeting. (Except Bonus Cab rear compartment.)

- **Instrument Cluster:** Voltmeter, oil pressure gage, and engine

temperature gage replace warning lamps; includes pewter-toned brush-finished bezel

- **Instrument Panel Pad Applique:** Pewter-toned brushed finish with bright, black, and silver trim

- **Insulation:** Extra-thick insulators for entire front and rear compartment floor areas, except under rear portion of Bonus Cab floor mat

- **Seats:** Choice of: 1) all-vinyl pigskin grained trim; or 2) textured velour cloth/vinyl trim. See Interior and Exterior Color Selection Chart for color and trim availability. NOTE: Crew Cab models have two bench seats—seating for six; Bonus Cab models have one bench seat—seating for three

- **Steering Wheel:** Bright trim on horn button

- **Visor Mirror:** On RH sun visor

C/K PICKUP

SILVERADO/SIERRA CLASSIC MODEL OPTION—RPO YE9 (FOR REGULAR CAB MODELS)

This option includes all items in the Scottsdale/High Sierra model option plus the additions or substitutions listed below



GMC model shown (Chevrolet model available)


EXTERIOR

- **Bright Appearance Items:**

- "Silverado/Sierra Classic" nameplates with series designation on front fenders
- Chrome-trimmed grille and headlamp bezels (Chevrolet models only)
- Chevrolet emblem/GMC letters at grille center
- Cab back panel applique molding
- "Chevrolet/GMC letters" nameplate on tailgate applique panel (Fleetside/Wideside only)
- Bright applique panel fitted over central area of tailgate with

- black-trimmed decorative border (Fleetside/Wideside only)
- Body side and rear moldings with black paint trim (Fleetside/Wideside models with single rear wheels only)
- Wheel-opening lip moldings with black paint trim (Fleetside/Wideside models with single rear wheels only)

- **Cab-to-Fender Insulators**
- **Grille and Headlamp Bezel Paint:** Dark argent (Chevrolet); argent/dark argent (GMC)
- **Hood Insulator**
- **Special Headlamps:** Rectangular; dual RH and LH

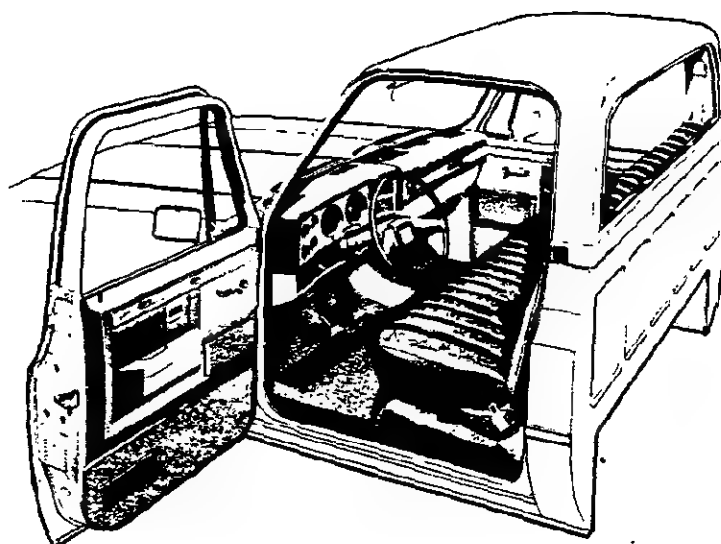

INTERIOR

- **Bright Appearance Items:**

- "Silverado/Sierra Classic" nameplate on instrument panel pad
- MM4 four-speed transmission shift lever (C1-2-3 models)
- Trim on horn button
- **Cowl Panel Trim:** Color-keyed molded plastic on entire surface of cowl side panels
- **Door Trim Panels:** Special color-keyed molded plastic with pewter-toned brush-finished upper decorative inserts having bright, black, and silver borders; cloth inserts in armrest area; vinyl storage pockets; door closing assist straps; plus carpeting and bright trim strips on lower portions
- **Floor Covering:** Color-keyed carpeting
- **Headliner:** Perforated, color-keyed, molded cloth with fiberglass blanket backing, includes matching retainer moldings

- **Instrument Cluster:** Voltmeter, oil pressure gage, and engine temperature gage replace warning lamps; includes pewter-toned brush-finished bezel
- **Instrument Panel Pad Applique:** Pewter-toned brushed finish with bright, black, and silver trim
- **Insulation:** Headliner insulator, extra-thick insulators for entire floor area
- **Seat:** Choice of: 1) all-vinyl pigskin grained trim; or 2) textured velour cloth/vinyl trim. See Interior and Exterior Color Selection Chart for color and trim availability
- **Steering Wheel:** Bright trim on horn button
- **Trim Panels:** Color-keyed molded plastic on windshield pillars and upper rear quarter panels
- **Visor Mirror:** On RH sun visor

C/K PICKUP

SCOTTSDALE/HIGH SIERRA MODEL OPTION—RPO Z62 (FOR ALL MODELS)

This option includes all Custom Deluxe/Sierra standard model items plus the additions or substitutions listed below



Chevrolet model shown (GMC model available)


EXTERIOR

• Bright Appearance Items:

- "Scottsdale/High Sierra" nameplates with series designation on front fenders
- Body side and rear molding trim (Fleetside/Wideside models with single rear wheels only)
- Chevrolet emblem/GMC letters at grille center
- Front fender side marker lamp trim
- Rear fender clearance lamp trim (Fleetside/Wideside models

- with dual rear wheels only)
- Taillamp trim (Fleetside/Wideside only)
- Windshield and rear window reveal moldings

- **Horn:** Additional, electric high-note
- **Moldings:** Black plastic body side and rear moldings with bright trim (Fleetside/Wideside models with single rear wheels only)

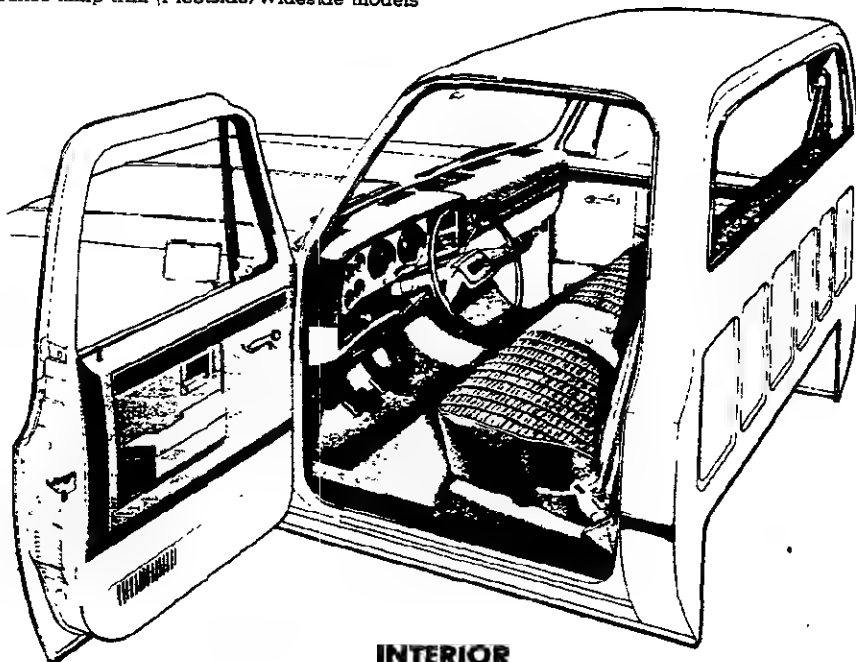

INTERIOR

• Bright Appearance Items:

- "Scottsdale/High Sierra" nameplate on instrument panel pad
- Dome lamp trim
- Trim on instrument cluster bezel, instrument panel pad applique
- Trim on door trim panels (regular cabs only)
- **Cigar Lighter:** With fiber optic illuminated ashtray
- **Dome Lamp:** With bright trim
- **Dome and Interior Lamp Switches:** Front door-operated (dome and interior lamps also may be activated by main light switch)
- **Door Trim Panels:** Color-keyed embossed molded plastic, with black crackle-finished upper decorative inserts having a silver border (Regular Cabs only)
- **Floor Covering:** Color-keyed rubber mats (except Bonus Cab


rear compartment mat)

- **Headliner:** Full-length mystic-colored, perforated molded cloth with fiberglass blanket backing; includes matching retainer moldings (Crew Cabs and Bonus Cabs only)
- **Insulation:** Under cowl panel, on Crew Cab and Bonus Cab headliner, and on cab back panel
- **Pillar Trim Panels:** Mystic molded plastic on windshield pillars and center door pillars (Crew Cabs and Bonus Cabs only)
- **Seats:** See Interior and Exterior Color Selection Chart for color and trim availability
 - Regular Cabs—choice of: 1) dual-tone woven cloth/vinyl trim; or 2) all-vinyl pigskin grained trim
 - Crew Cabs and Bonus Cabs—embossed grained all-vinyl trim standard. Also available at extra cost: 1) all-vinyl pigskin grained trim; or 2) textured velour cloth/vinyl trim

C/K PICKUP

CUSTOM DELUXE/SIERRA FEATURES—STANDARD MODEL

The Custom Deluxe/Sierra standard models include the following items as standard equipment

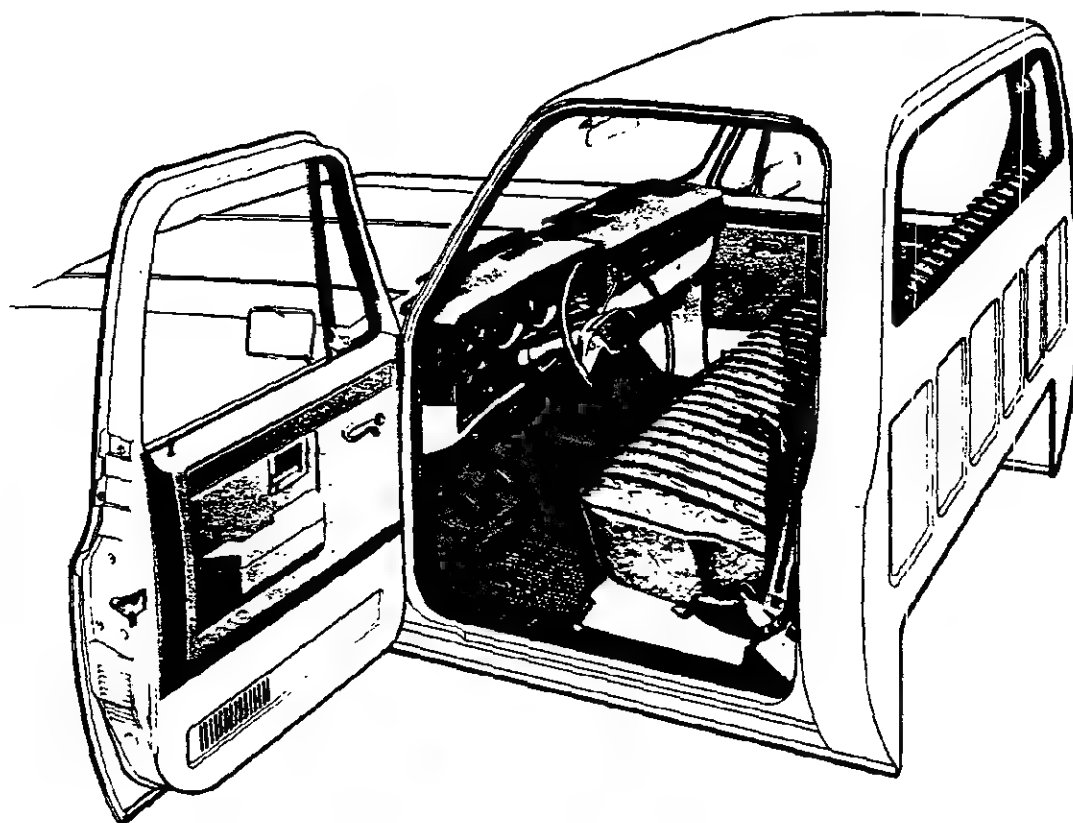

INTERIOR

- **Armrests:** RH and LH padded; integral with door trim panels
- **Ashtrays:** In middle of instrument panel (all models) and in rear door trim panels (Crew Cabs and Bonus Cabs)
- **Coat Hooks:** RH (all models) and over rear doors (Crew Cabs and Bonus Cabs)
- **Colors:**
Painted areas: Same as exterior primary color choice
Interior trim: Coordinated with seat trim color choice
- **Door Sill Plates:** Door-opening protection and floor mat retention; full-length; black plastic for Regular Cab front doors and bright metal for Bonus Cab and Crew Cab front and rear doors
- **Door Trim Panels:** Color-keyed, embossed molded plastic with integral armrests
- **Floor Covering:** Embossed black rubber mats
- **Heater and Defogger:** Deluxe-air
- **Hood Lock Release:** Handle located on LH side under instrument panel
- **Instrument Cluster Bezel:** Black crackle finish with bright trim
- **Instruments:**
Gages: Speedometer, odometer and fuel
Switches: Main, for control of exterior lights, instrument cluster lights, and cab interior lights; multi-function switch on steering column for direction signals by moving lever up or down (includes lane change position), headlamp beams by pulling lever toward driver, windshield wiper by turning band marked "WIPER" toward or away from driver, and windshield washer by pushing in the lever knob; ignition with key-in warning buzzer; hazard warning; heater fan
Warning lights: Generator, oil pressure, engine temperature, seat belt, service-parking brake, direction/hazard signal, and high beam
- **Instrument Panel Control Knobs:** Soft black plastic (except heater and wiper-washer controls) with white graphic identification
- **Instrument Panel Pad:** Color-keyed, energy-absorbing foam type with grained vinyl skin; has black crackle-finished applique on RH side with bright, black, and silver trim and bright "Custom Deluxe/Sierra" nameplate
- **Insulation and Sound Deadening Material:** Dash (firewall), under front seat at center, under front floor mat, under rear floor mat and under rear seat at center on Crew Cabs, under rear floor mat on Bonus Cabs (center portion only in rearmost area) and between double-walled roof panel of regular cabs. NOTE: Extra-thick insulation used for front portion of Crew Cab and Bonus Cab rear compartment
- **Lights:** Instrument cluster and cab interior lights
- **Mirror, Rearview:** 10" prismatic with soft vinyl rim
- **Seats:** Full-width, full depth foam bench-type with embossed grained all-vinyl trim; front (all models) and rear (Crew Cabs only); includes folding backrest for regular cab seat and Crew Cab rear seat. Also available at extra cost: (1) dual-tone woven cloth/vinyl trim; or (2) all-vinyl pigskin grained trim. See Interior and Exterior Color Selection Chart for color and trim availability. NOTE: Crew Cab models have two bench seats—seating for six; Bonus Cab models have one bench seat—seating for three
- **Seat Belts:** Front (all models): non-detachable combination lap and shoulder belts for outboard positions with emergency-locking retractors and switch in driver's lap belt retractor for buzzer warning system, lap belt with manual adjustment for center position. Rear (Crew Cabs only): lap belts with emergency-locking retractors for outboard positions; lap belt with manual adjustment for center position. All seat belts are color-keyed with pushbutton type buckles
- **Steering Wheel and Column:** 16" black, soft plastic wheel with 2 spokes; black energy-absorbing steering column with anti-theft locking feature
- **Storage Box:** In RH side of instrument panel; door has bright turn-type latch release
- **Sunshades:** RH and LH padded; color-keyed

C/K PICKUP

CUSTOM DELUXE/SIERRA FEATURES—STANDARD MODEL

The Custom Deluxe/Sierra standard models include the following items as standard equipment



EXTERIOR

- **Bumper:** Front; chromed
- **Color:** See Interior and Exterior Color Selection Chart
- **Grille and Headlamp Bezels:** Molded plastic; painted light argent (GMC grille has dark argent air intake areas); integral Chevrolet emblem/GMC letters at center of grille
- **Horn:** Single, electric, low-note
- **Hub Caps:** Bright metal with black trim (single rear wheel models only)
- **Keys:** Two-key system; with separate keys for ignition switch and door locks
- **Lettering, "Chevrolet/GMC" Tailgate:** White decal except black with Frost White body color
- **Lights:**
 - Backup lamps: Two rear (integral with taillamps)
 - Clearance and identification lamps (K3 Series models only):
 - Five front (on roof); Five rear (on tailgate)
 - Combination parking/direction/hazard: Two front
 - Combination tail/stop/direction/hazard: Two rear
 - Headlamps: Two, rectangular
 - License plate lamp: Single rear
- **Side marker lamps with reflectors:** two front; two rear (integral with taillamps)
- **Mirrors:** RH and LH fixed arm with adjustable 5-7/16" wide x 4" high heads; chrome finish
- **Moldings:** Bright; drip molding over side doors; headlamp and grille outline moldings
- **Nameplates:** Bright "Custom Deluxe/Sierra" nameplates with series designation on front fenders near doors; bright "3 + 3" nameplates on Crew Cab models or "BONUS CAB" nameplates on Bonus Cab models on cab rear quarters at styling crease line
- **Pickup Box:** Steel floor on Fleetside/Wideside models and wood floor with steel skid strips on Stepside/Fenderside models; painted body color
- **Spare Tire Carrier:** Under frame in back (C-K1 Series models only)
- **Tools:** Mechanical jack and wheel wrench
- **Wheels:** Painted white
- **Windshield Wipers and Washers:** Electric, 2-speed wipers with black finish on exposed metal portions, wet-arm design demand-type washer system



C/K PICKUP

CAB & BODY FEATURES

CAB CONSTRUCTION

CAB DIMENSIONS

COLOR & TRIM CHARTS

TWO-TONES

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1986 model motor vehicles

Description	Option Number	Factory D&H(s)	List Price	Mfr's Suggested Retail Price◇
OTHER OPTIONS				
Towing Device: Two front towing hooks.	V76	N.A.	38.00	36.00
Wheel Trim: Bright Metal.				
Wheel Covers:				
C-K1 Series only	P01	N.A.	40.00	40.00
C3 Series only. Available only when R05 Dual Rear Wheels and 7.50-16 Tires are specified.	P01	N.A.	49.00	49.00
Wheel Covers, Special. C-K2 and C3 Series only. Not available when R05 Dual Rear Wheels are specified	PA1	N.A.	118.00	118.00
Wheels: C-K1 Series only.				
Rally. Includes special hub caps and trim rings. Included when YJ6 Value Decor Package is specified.				
Without P225 or P235 Tires. Wheel size is 15" x 7"	N67	N.A.	115.00	115.00
With P225 or P235 Tires. Wheel size is 15" x 8"	N67	N.A.	115.00	115.00
Styled. Includes special hub caps. Four wheels only.				
Without P225 or P235 Tires. Wheel size is 15" x 7"	PA6	N.A.	174.00	174.00
With P225 or P235 Tires. Wheel size is 15" x 8"	PA6	N.A.	174.00	174.00
Aluminum. Cast. Four Wheels only Includes 15" x 7" wheels and special hub caps.	N90	N.A.	299.00	299.00
Wheels, Dual Rear: C-K3 Fleetside only. Not available when L25 4.8 Liter Engine is specified. Includes plastic rear fender extensions with side marker lamps located on front and rear sides and dual rear chassis provisions				
C3 Series only. Available only when Z76 Special Commercial Chassis Equipment or Z81 Camper Special Chassis Equipment is specified. MX1 Automatic Transmission available only when V02 H.D. Radiator and Transmission Oil Cooler is specified. Includes U01 Roof Marker Lamps				
Without C60 Air Conditioning, LE8 7.4 Liter Engine or B3J Diesel Equipment. Includes K81 66-Amp Generator	R05	N.A.	740.00	740.00
With LE8 7.4 Liter Engine. Includes K22 9-4-Amp Generator	R05	N.A.	740.00	740.00
With C60 Air Conditioning or B3J Diesel Equipment.	R05	N.A.	678.00	678.00
K3 Series only MX1 Automatic Transmission available only when V02 H.D. Radiator and Transmission Oil Cooler is specified. Includes G60 Main and Auxiliary Springs	R05	N.A.	725.00	725.00
Wheels, Single Rear: C-K3 Fleetside only. Not available when R05 Dual Rear Wheels are specified	R04	NO ADDITIONAL CHARGE		
Windows:				
Power. Included when ZQ2 Operating Convenience Package is specified				
Regular Cab only	A31	N.A.	190.00	190.00
Bonus and Crew Cab only	A31	N.A.	290.00	290.00
Sliding Rear. (Note: If A01 Tinted Glass is specified, sliding window will remain clear.)	A28	N.A.	107.00	107.00
Windshield Wiper System: Intermittent Not available when MM3 3-Speed Manual Transmission is specified.	CD4	N.A.	55.00	55.00

(a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

◇ State and local taxes not included.

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1986 model motor vehicles

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price ◇
OTHER OPTIONS				
Springs: (Continued)				
Capacity 2250-lb each. K1 Series only. Includes H.D. front and rear shock absorbers. Recommended for snowplow type usage only				
Without Z75 Front Quad Shocks	F60	N.A.	92.00	92.00
With Z75 Front Quad Shocks	F60	N.A.	59.00	59.00
K2 Series only. Included when Z81 Camper Special Chassis Equipment is specified. Includes H.D. front and rear shock absorbers when C6P H.D. Chassis is not specified.				
Without Z75 Front Quad Shocks or C6P H.D. Chassis	F60	N.A.	92.00	92.00
With Z75 Front Quad Shocks or C6P H.D. Chassis	F60	N.A.	59.00	59.00
Rear, Heavy-Duty. Not available on C6P H.D. Chassis, C2 Bonus and Crew Cab, C3 and K1-2-3 Series.				
Capacity 1750-lb each. C1 Series only.	G50	N.A.	58.00	58.00
Capacity 2600-lb each, two-stage. C2 Regular Cab only. Not available when C6P H.D. Chassis or Z81 Camper Special Chassis Equipment is specified	G50	N.A.	58.00	58.00
Rear, Extra Capacity.				
Capacity 2000-lb each. C1 Series only	G51	N.A.	71.00	71.00
Capacity 3000-lb each. C2 Series only. Standard on C2 Bonus and Crew Cab and C-K3 Series only. Not available on K2 Series. Included when C6P H.D. Chassis is specified	G51	N.A.	71.00	71.00
Rear, Main and Auxiliary. Capacity 3750-lb each. C-K3 Series only. Included when Z81 Camper Special Chassis Equipment is specified with R05 Dual Rear Wheels or Z76 Commercial Chassis Equipment on C3 Series. Also included when R05 Dual Rear Wheels are specified on K3 Series.	G60	N.A.	97.00	97.00
Stabilizer Bars:				
Front. 1" diameter. Standard on C2 Bonus or Crew Cab. Included when C6P H.D. Chassis is specified on C2 Series. Not available on K1-2-3 Series or when Z76 Commercial Chassis Equipment or Z81 Camper Special Chassis Equipment is specified	F59	N.A.	38.00	38.00
Front, Heavy-Duty. 1.25" diameter. C2-3 Series only. Standard on K1-2-3 Series. Included when Z76 Commercial Chassis Equipment or Z81 Camper Special Chassis Equipment is specified				
Without C6P H.D. Chassis	F58	N.A.	55.00	55.00
With C6P H.D. Chassis and C2 Bonus or Crew Cab	F58	N.A.	17.00	17.00
Steering:				
Power. Standard on K1-2-3 Series. Included when B3J Diesel Equipment is specified	N41	N.A.	260.00	260.00
Power, Not Desired. C1-2-3 Series only. Not available when B3J Diesel Equipment is specified	N51	NO ADDITIONAL CHARGE		
Steering Wheel: Comfort. Not available when MM3 3-Speed Manual Transmission is specified.	N33	N.A.	115.00	115.00
Tank, Fuel: Auxiliary. RH Frame Mounted.				
C-K1 Series only				
Without B3J Diesel Equipment. Provides two fuel tanks of approximately 16-gallon per tank	NL2	N.A.	260.00	260.00
With B3J Diesel Equipment.				
C-K10703. Provides two fuel tanks of approximately 16-gallon per tank	NL2	N.A.	272.00	272.00
C-K10903. Provides two fuel tanks of approximately 20-gallon per tank	NL2	N.A.	272.00	272.00
C-K2.3 Series only. Provides two fuel tanks of approximately 20-gallon per tank.				
Without B3J Diesel Equipment	NL2	N.A.	260.00	260.00
With B3J Diesel Equipment	NL2	N.A.	272.00	272.00

- (a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
 ◇ State and local taxes not included.

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1988 model motor vehicles

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price [◇]
OTHER OPTIONS				
Moldings: (Continued)				
<i>Deluxe Package</i> Fleetside only. Not available when YG1 Custom Molding Package or R05 Dual Rear Wheels are specified. Included when YE9 is specified. Includes bright trim for front side marker lamps and taillights, B85 Bright Body Side Moldings and wheel opening moldings.				
Without Z62, ZY3 Special Two-Tone Paint, ZY4 Deluxe Two-Tone Paint or ZY5 Exterior Decor Package	YG3	N.A.	173.00	173.00
With Z62	YG3	N.A.	44.00	44.00
With ZY3 Special Two-Tone Paint, ZY4 Deluxe Two-Tone Paint or ZY5 Exterior Decor Package	YG3	N.A.	16.00	16.00
<i>Guards, Door Edge.</i>				
Regular Cab only	B93	N.A.	17.00	17.00
Bonus Cab or Crew Cab only	B93	N.A.	22.00	22.00
Operating Convenience Package: Includes AU3 Power Door Locks and A31 Power Windows				
Regular Cab only	ZQ2	N.A.	325.00	325.00
Bonus and Crew Cab only	ZQ2	N.A.	488.00	488.00
Preliminary Price Information				
	B3W	N.A.	N.A.	N.A.
Radio Equipment:				
AM Radio	U63	N.A.	112.00	112.00
AM/FM Radio	U69	N.A.	171.00	171.00
AM/FM Stereo Radio	U58	N.A.	198.00	198.00
AM/FM Stereo Radio with Stereo Cassette Tape	UN3	N.A.	298.00	298.00
AM/FM Stereo Radio with Seek and Scan, Stereo Cassette Tape and Digital Clock, Electronically Tuned	UM6	N.A.	419.00	419.00
Windshield Antenna. Included with radio	U76	N.A.	32.00	32.00
Rails, Pickup Box Side				
	D73	N.A.	94.00	94.00
Shield, Transfer Case: K1-2-3 Series only.				
	NY7	N.A.	41.00	41.00
Shock Absorbers: Heavy-Duty, Front and Rear Standard on C2 Bonus and Crew Cab and C-K3 Series. Included on C2 Series when C6P H.D. Chassis is specified. Not available K1-2 Series				
	F51	N.A.	34.00	34.00
Shocks, Front Quad: K1-2 Regular Cab only Includes dual left and right hand shock absorbers on front, heavy duty shock absorbers on rear and a front axle nose bumper to limit axle windup				
K1 Series only	Z76	N.A.	128.00	128.00
K2 Series only				
Without C6P H.D. Chassis	Z75	N.A.	128.00	128.00
With C6P H.D. Chassis	Z75	N.A.	94.00	94.00
Speed Control, Electronic: C1 Series without B3J Diesel Equipment is available only when J50 or J55 H.D. Power Brakes are specified. C-K1 Series not available when MM7 4-Speed with Overdrive Transmission is specified. C-K2-3 Series with LS9, LT9 or LE8 Engine, MM4 4-Speed Transmission is not available				
	K34	N.A.	195.00	195.00
Springs:				
<i>Front, Heavy-Duty.</i> Not available on C2 Bonus and Crew Cab and C-K3 Series				
Capacity 1625-lb each C1 Series not available when J55 HD Power Brakes or B3J Diesel Equipment is not specified.	F60	N.A.	14.00	14.00
Capacity 1700-lb each. C1 Series only. Included when B3J Diesel Equipment is specified. Available only when J55 H.D. Power Brakes are specified	F60	N.A.	14.00	14.00
Capacity 1900-lb each C2 Series only. Included when C6P H.D. Chassis or B3J Diesel Equipment is specified	F60	N.A.	14.00	14.00

(a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
[◇] State and local taxes not included.

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1986 model motor vehicles

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price
OTHER OPTIONS				
Glass: Tinted. All Windows.				
Regular Cab only	A01	N.A.	46.00	46.00
Bonus Cab or Crew Cab only	A01	N.A.	56.00	56.00
Headlamps: Halogen Hi-Beam. Available only when V22 Deluxe Front Appearance Package or YE9 is specified	TT5	N.A.	17.00	17.00
Hesters:				
Engine Block. 600 Watts, 120 Volts. Not available when B3J Diesel Equipment or LF3 5.0 Liter Engine is specified. Included when V10 Cold-Climate Package is specified	K05	N.A.	31.00	31.00
Heavy Duty, Front. Available only when B3J Diesel Equipment is specified. Not available when C6D Air Conditioning is specified	C42	N.A.	43.00	43.00
Hubs, Automatic Locking: K1 series only	X62	N.A.	40.00	40.00
Lamps:				
Cargo.				
Without Z62 or YE9. Includes C91 Dome Lamp	UF2	N.A.	60.00	60.00
With Z62 or YE9	UF2	N.A.	34.00	34.00
Dome. Included when Z62, YE9 or UF2 Cargo Lamp is specified. Includes door actuated switches and bright lamp bezels	C91	N.A.	26.00	26.00
Roof Marker. Five, C-K2 Series only. Standard on K3 Series. Without R05 Dual Rear Wheels, available only when NA5 Standard or NA6 High Altitude Emission Equipment is specified. Included when R05 Dual Rear Wheels are specified	U01	N.A.	50.00	50.00
	U37	N.A.	30.00	30.00
Lighter, Cigarette: Included when Z62 or YE9 is specified				
Mirrors, Exterior: LH and RH.				
Below-Eye-Line Type. 9" x 6.5"				
Painted	D44	N.A.	50.00	50.00
Stainless Steel	D45	N.A.	83.00	83.00
Camper Type. Stainless steel. 7.5" x 10.5". Adjustable arm feature to provide field of vision for vehicles to 96" wide. Shipped loose for dealer installation	DF2	N.A.	94.00	94.00
Senior West Coast Type. Painted. C-K3 Series only. Shipped loose for dealer installation	DG5	N.A.	65.00	65.00
Moldings: Fleetside only.				
Body Side Black. Bright with black insert. Not available when YE9, R05 Dual Rear Wheels, B85 Bright Body Side Moldings or YG3 Deluxe Molding Package is specified. Included when YG1 Custom Molding Package, Z62, ZY3 Special Two-Tone Paint, ZY4 Deluxe Two-Tone Paint or ZY5 Exterior Decor Package is specified. Includes lower side and rear moldings of black plastic with bright trim	B84	N.A.	115.00	115.00
Body Side Bright. Not available when B84 Black Body Side Moldings, YG1 Custom Molding Package, R05 Dual Rear Wheels, ZY3 Special Two-Tone Paint, ZY4 Deluxe Two-Tone Paint or ZY5 Exterior Decor Package is specified. Included when YG3 Deluxe Molding Package or YE9 is specified. Includes bright plastic body side rear lower moldings with black paint trim plus bright trim for front side marker lamps and taillights				
Without Z62	B85	N.A.	144.00	144.00
With Z62	B85	N.A.	15.00	15.00
Custom Package. Fleetside only. Not available when YG3 Deluxe Molding Package, YE9 or R05 Dual Rear Wheels are specified. Included when ZY3 Special Two-Tone Paint, ZY4 Deluxe Two-Tone Paint or ZY5 Exterior Decor Package is specified. Includes B84 Black Body Side Moldings, wheel opening moldings, bright trim for front side marker lamps and taillights				
Without Z62	YG1	N.A.	157.00	157.00
With Z62	YG1	N.A.	29.00	29.00

- (a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
 ◇ State and local taxes not included.

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1986 model motor vehicles

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price ◇
OTHER OPTIONS				
Clock: Quartz Electric. Not available when UM5 Radio is specified.				
Without YE9 Includes Z53 Voltmeter, Temperature and Oil Pressure Gages	U35	N.A.	79.00	79.00
With YE9	U35	N.A.	39.00	39.00
Cold-Climate Package: Not available when C60 Air Conditioning or B3J Diesel Equipment is specified. Includes special insulation, K81 66-Amp Generator, special heater and defroster, K05 Engine Block Heater, anti-freeze protection to -32 degrees and UA1 H.D. Battery.				
Without R05 Dual Rear Wheels.				
Without Z62 or YE9	V10	N.A.	200.00	200.00
With YE9 or Z62	V10	N.A.	188.00	188.00
C3 Series with R05 Dual Rear Wheels and K3 Series.				
Without Z62 or YE9	V10	N.A.	138.00	138.00
With Z62 or YE9	V10	N.A.	126.00	126.00
Commercial Chassis Equipment, Special: C3 Fleetside only. Available only when R05 Dual Rear Wheels are specified. Not available when L25 4.8 Liter Engine or Z81 Camper Special is specified. Includes F58 H.D. Front Stabilizer, rear stabilizer and G60 Main and Auxiliary Rear Springs	Z76	N.A.	194.00	194.00
Cooling Systems:				
Engine Oil. Not available when L25 4.8 Liter Engine or B3J Diesel Equipment is specified.	KC4	N.A.	120.00	120.00
Radiator, Heavy-Duty. Not available when C60 Air Conditioning or B3J Diesel Equipment is specified.				
C-K1 Series only	V01	N.A.	53.00	53.00
C-K2-3 Series only. Not available when MX0 or MX1 Automatic Transmission is specified	V01	N.A.	53.00	53.00
Radiator and Transmission Oil, Heavy-Duty Not available when L25 4.8 Liter Engine or V01 H.D. Raditor is specified. Available only when MX1 or MX0 Automatic Transmission is specified.	V02	N.A.	59.00	59.00
Decor Package, Value: (Refer YJ6 Color and Striping Availability Chart for ordering information) Not available on Bonus Cab, Crew Cab or Stepside Models. Not available when YE9, R05 Dual Rear Wheels, V22 Deluxe Front Appearance, whitewall tires, PA6 or N90 Wheels, B84 or B85 Body Side Moldings. Available only when ZY1 Solid Paint and 12A, 19A, 29A or 72A Striping and blackwall or white lettered tires are specified. Includes blacked painted radiator grille and headlamp bezels and special body stripe located between body feature lines on the front fenders, pickup box and will extend across the tailgate				
C-K1 series. Also includes N67 Rally Wheels	YJ6	N.A.	256.00	256.00
C-K2-3 Series.	YJ6	N.A.	141.00	141.00
Door Lock System, Power: Included when ZQ2 Operating Convenience Package is specified				
Regular Cab only	AU3	N.A.	135.00	135.00
Bonus and Crew Cab only	AU3	N.A.	198.00	198.00
Floor Covering: Mats, Color-Keyed Front Floor, Removable. Available only when YE9 is specified	B32	N.A.	15.00	15.00
Gages: Voltmeter, Temperature and Oil Pressure. Included when YE9 or U35 Electric Clock is specified	Z53	N.A.	40.00	40.00
Generators:				
66-Amp Delcotron. Standard on K3-Series except when LE8 7.4 Liter Engine is specified. Included when B3J Diesel Equipment, C60 Air Conditioning, V10 Cold-Climate Package or R05 Dual Rear Wheels are specified	K81	N.A.	62.00	62.00
94-Amp Delcotron. Included when LE8 7.4 Liter Engine and C60 Air Conditioning or R05 Dual Rear Wheels are specified. Also included on K3 series when LE8 7.4 Liter Engine is specified	K22	N.A.	62.00	62.00

(a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon
 ◇ State and local taxes not included.

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1986 model motor vehicles

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price ◇
OTHER OPTIONS				
Air Cleaner, Pre-Cleaner: Not available when L25 4.8 Liter Engine is specified	K46	N.A.	42.00	42.00
Air Conditioning: All-Weather. With LB1 4.3 Liter Engine available only when KC4 Engine Oil Cooler is specified. Not available when V10 Cold-Climate Package is specified. Includes extra cooling.				
Without B3J Diesel Equipment or LE8 7.4 Liter Engine. Includes K81 66-Amp Generator	C60	N.A.	740.00	740.00
With LE8 7.4 Liter Engine. Includes K22 94-Amp Generator	C60	N.A.	740.00	740.00
With B3J Diesel Equipment or K3 Series	C60	N.A.	678.00	678.00
Appearance, Deluxe Front: Includes dark argent grille with bright trim and dual rectangular headlamps. Included when YE9 is specified	V22	N.A.	109.00	109.00
Batteries: 12-Volt, 515 Cold Cranking Amps Delco Freedom. Not available when B3J Diesel Equipment is specified.				
Auxiliary. Not available on C-K1 Series	TP2	N.A.	126.00	126.00
Heavy-Duty. Included when V10 Cold-Climate Package is specified	UA1	N.A.	53.00	53.00
Brakes:				
Power. C1 Series only. Not available when B3J Diesel Equipment is specified	J50	N.A.	95.00	95.00
Heavy-Duty Power. Standard on K1 Series, C2 Bonus and Crew Cab and C-K3 Series. Included when C6P H.D. Chassis is specified.				
Without B3J Diesel Equipment.				
C1 Series only	J55	N.A.	174.00	174.00
C2 Regular Cab only. Available only when G50 H.D. or G51 Extra Capacity Rear Springs are specified	J55	N.A.	104.00	104.00
K2 Regular Cab only	J55	N.A.	104.00	104.00
With B3J Diesel Equipment				
C1 Series	J55	N.A.	79.00	79.00
C2 Regular Cab only. Available only when G50 H.D. or G51 Extra Capacity Rear Springs are specified	J55	N.A.	104.00	104.00
K2 Regular Cab	J55	N.A.	104.00	104.00
Bumper Equipment:				
Bumpers, Chromed.				
Rear	VF1	N.A.	103.00	103.00
Rear Step, Fleetside only	V42	N.A.	189.00	189.00
Bumpers, Painted. Rear Step	V43	N.A.	120.00	120.00
Guards, Front Bumper. Chromed	V31	N.A.	41.00	41.00
Camper Special Chassis Equipment: Basic Camper Group. C-K2-3 Series only. Available only when V8 engine is specified. Includes camper body wiring harness.				
C2 Series only. Also includes F58 H.D. Front Stabilizer.				
Regular Cab only. Available only when C6P H.D. Chassis is specified	Z81	N.A.	66.00	66.00
Bonus Cab or Crew Cab only	Z81	N.A.	66.00	66.00
K2 Series only. Available only when C6P H.D. Chassis is specified. Also includes F60 H.D. Front Springs	Z81	N.A.	108.00	108.00
C3 Series only. Also includes F58 H.D. Front Stabilizer.				
Without R05 Dual Rear Wheels	Z81	N.A.	104.00	104.00
With R05 Dual Rear Wheels. 10,000-lb GVW. Includes G80 Main and Auxiliary Rear Springs and rear stabilizer	Z81	N.A.	242.00	242.00
K3 Series only. Available only when R05 Dual Rear Wheels are specified	Z81	N.A.	49.00	49.00
Carriers, Spare Wheel and Tire: Available only when spare tire is specified.				
Glide-Out	P11	N.A.	41.00	41.00
Side Mounted. Fleetside only	P13	N.A.	29.00	29.00

- (a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
 ◇ State and local taxes not included.

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1986 model motor vehicles

Description	Option Number	Factory D&H(s)	List Price	Mfr's Suggested Retail Price (◊)
Tires: (Continued)				
LT235/85R16-D Highway Steel Belted Radial Ply Blackwall (Maximum Capacity 2623-lbs).				
Front				
C-K2 Regular Cab without C6P H.D. Chassis	XYM	1.76	84.00	85.76
C-K2 Regular Cab with C6P H.D. Chassis or C20943 Bonus and Crew Cab. (Standard)	XYM	NO ADDITIONAL CHARGE		
C-K3 Series only. (Standard)	XYM	NO ADDITIONAL CHARGE		
Rear. C-K2 Regular Cab only. Not available when C6P H.D. Chassis is specified	YYM	1.76	84.00	85.76
Spare C-K2 Regular Cab only. Not available when C6P H.D. Chassis is specified.	ZYM	.88	352.00	352.88
LT235/85R16-E On-Off Road Steel Belted Radial Ply Blackwall (Maximum Capacity 3042-lbs). C-K2 Regular Cab available only when C6P H.D. Chassis is specified. K3 Series not available when R05 Dual Rear Wheels are specified.				
Front. K2-3 Series only	XYT	.76	86.00	86.76
Rear. C-K2 or K3 Series only	YYT	.52	54.00	54.52
Spare. C-K2 or K3 Series only	ZYT	1.28	395.00	396.28
LT235/85R16-E Highway Steel Belted Radial Ply Blackwall (Maximum Capacity 3042-lbs). Available only when C6P H.D. Chassis is specified on C2 Regular Cab. C-K3 not available when R05 Dual Rear Wheels are specified.				
Front				
C2 or C-K3 Series only	XYN	.24	32.00	32.24
K2 Series only.				
Without C6P H.D. Chassis	XYN	2.00	116.00	118.00
With C6P H.D. Chassis	XYN	.24	32.00	32.24
Rear				
C2 or C-K3 Series only (Standard)	YYN	NO ADDITIONAL CHARGE		
K2 Series only				
Without C6P H.D. Chassis	YYN	2.00	116.00	118.00
With C6P H.D. Chassis. (Standard)	YYN	NO ADDITIONAL CHARGE		
Spare C-K2-3 Series only	ZYN	1.00	368.00	369.00
TUBE-TYPE				
7.50-16/C Highway Nylon Blackwall (Maximum Capacity each. Front 2060-lbs) (Dual Rear 1815-lbs). Available only when R05 Dual Rear Wheels are specified.				
Front. C3 Series	XPB	(-1.76)	(-284.00)	(-285.76)
Rear. C3 Regular Cab only	YPB	(-2.00)	50.00	48.00
Spare. C3 Regular Cab only	ZPB	N.C.	210.00	210.00
7.50-16/C On-Off Road Nylon Ply Blackwall (Maximum Capacity each. Dual Rear 1815-lbs). Available only when R05 Dual Rear Wheels are specified. C3 Regular Cab only				
Rear	YPC	(-2.00)	162.00	160.00
Spare	ZPC	N.C.	238.00	238.00
7.50-16/D Highway Nylon Ply Blackwall (Maximum Capacity each. Front 2440-lbs) (Dual Rear 2140-lbs). Available only when R05 Dual Rear Wheels are specified.				
Front	XPB	(-1.76)	(-252.00)	(-253.76)
Rear	YPB	(-2.00)	114.00	112.00
Spare	ZPB	N.C.	226.00	226.00
7.50-16/D On-Off Road Nylon Ply Blackwall (Maximum Capacity each. Front 2440-lbs) (Dual Rear 2140-lbs). Available only when R05 Dual Rear Wheels are specified.				
Front. K3 Series only	XPG	(-1.76)	(-194.00)	(-195.76)
Rear. C-K Series only	YPG	(-2.00)	230.00	228.00
Spare	ZPG	N.C.	255.00	255.00

- (a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
 ◊ State and local taxes not included

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1986 model motor vehicles

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price◇
Tires: (Continued)				
31 x 10.50R/15LTB On-Off Road Steel Belted Radial Ply Blackwall. (Maximum Capacity 1775-lbs).				
K1 Series only. Available only when N67, N90 or PA6				
Wheels are specified				
Front	XUY	20	176.00	176.20
Rear	YUY	20	176.00	176.20
Spare	ZUY	10	88.00	88.10
31 x 10.50R/18LTB On-Off Road Steel Belted Radial Ply White Lettered. (Maximum Capacity 1775-lbs).				
K1 Series only. Available only when N67, N90 or PA6				
Wheels are specified				
Front	XUZ	.20	238.00	238.20
Rear	YUZ	.20	238.00	238.20
Spare	ZUZ	.10	119.00	119.10
7.50R16/D Highway Steel Belted Radial Ply Blackwall (Maximum Capacity 2440-lbs). Not available when C6P H.D.				
Chassis is specified. Regular Cab only				
Front	XWY	.86	(-68.00)	(-67.14)
Rear	YWY	.86	(-68.00)	(-67.14)
Spare	ZWY	.43	276.00	276.43
7.50R16/D On-Off Road Steel Belted Radial Ply Blackwall (Maximum Capacity 2440-lbs). Not available when C6P H.D.				
Chassis is specified. Regular Cab only				
Front. K2 Series only	XWX	2.00	(-10.00)	(-8.00)
Rear	YWX	2.00	(-10.00)	(-8.00)
Spare	ZWX	1.00	305.00	306.00
LT215/85R16-C Highway Steel Belted Radial Ply Blackwall (Maximum Capacity each Front or Single Rear 1940-lbs) (Dual Rear 1764-lbs). Not available on C-K2 Regular Cab when C6P H.D. Chassis is specified				
Front.				
C-K2 Regular Cab only. (Standard)	XYJ	NO ADDITIONAL CHARGE		(-63.76)
C3 Series only. Requires R05 Dual Rear Wheels	XYJ	(-1.76)	(62.00)	
Rear				
C-K2 Regular Cab only (Standard)	YYJ	NO ADDITIONAL CHARGE		492.00
C3 Regular Cab only. Requires R05 Dual Rear Wheels	YYJ	(-2.00)	494.00	
Spare				
C-K2 Regular Cab only	ZYJ	N.C.	310.00	310.00
C3 Regular Cab only. Requires R05 Dual Rear Wheels	ZYJ	N.C.	321.00	321.00
LT215/85R16-D Highway Steel Belted Radial Ply Blackwall (Maximum Capacity Front or Single Rear 2315-lbs). (Dual Rear 2105-lbs) Not available C-K2 Regular Cab when C6P H.D. Chassis is specified.				
Front.				
C-K2 Regular Cab only	XYK	.10	32.00	32.10
C-K3 Series only. Requires R05 Dual Rear Wheels	XYK	(-1.66)	(-30.00)	(-31.66)
Rear				
C-K2 Regular Cab only	YYK	.10	32.00	32.10
C-K3 Series only Requires R05 Dual Rear Wheels	YYK	(-1.80)	558.00	556.20
Spare				
C-K2 Regular Cab only	ZYK	.05	326.00	326.05
C-K3 Series only Requires R05 Dual Rear Wheels	ZYK	.05	337.00	337.05
LT215/85R16-D On-Off Road Steel Belted Radial Ply Blackwall (Maximum Capacity Front or Single Rear 2315-lbs). (Dual Rear 2105-lbs) Not available C-K2 Regular Cab when C6P H.D. Chassis is specified.				
Front.				
K2 Series only	XYL	.56	86.00	86.56
K3 Series only. Requires R05 Dual Rear Wheels	XYL	(-1.44)	24.00	22.56
Rear				
C-K2 Regular Cab only	YYL	.56	86.00	86.56
C-K3 Series only Requires R05 Dual Rear Wheels	YYL	(-.88)	666.00	665.12
Spare				
C-K2 Regular Cab only	ZYL	.28	353.00	353.28
C-K3 Series only Requires R05 Dual Rear Wheels	ZYL	.28	364.00	364.28

- (a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
◇ State and local taxes not included.

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1986 model motor vehicles

Description	Option Number	Factory D&H(s)	List Price	Mfr's Suggested Retail Price◇
Tires: (Continued)				
<i>P235/75R15 On-Off Road Steel Belted Radial Ply Blackwall</i> (Maximum Capacity 1843-lbs)				
Front				
K1 Series only	XES	N.C.	20.00	20.00
Rear				
C1 Series only				
Without B3J Diesel Equipment	YES	N.C.	116.00	116.00
With B3J Diesel Equipment	YES	N.C.	94.00	94.00
K1 Series only	YES	N.C.	20.00	20.00
Spare				
C1 Series only				
Without B3J Diesel Equipment	ZES	N.C.	58.00	58.00
With B3J Diesel Equipment	ZES	N.C.	47.00	47.00
K1 Series only	ZES	N.C.	10.00	10.00
<i>P235/75R15 All Seasons Steel Belted Radial Ply Whitewall</i> (Maximum Capacity 1843-lbs)				
Front				
C1 Series only				
Without B3J Diesel Equipment	XFM	N.C.	130.00	130.00
With B3J Diesel Equipment	XFM	N.C.	108.00	108.00
K1 Series only	XFM	N.C.	34.00	34.00
Rear				
C1 Series only				
Without B3J Diesel Equipment	YFM	N.C.	130.00	130.00
With B3J Diesel Equipment	YFM	N.C.	108.00	108.00
K1 Series only	YFM	N.C.	34.00	34.00
Spare				
C1 Series only				
Without B3J Diesel Equipment	ZFM	N.C.	65.00	65.00
With B3J Diesel Equipment	ZFM	N.C.	54.00	54.00
K1 Series only	ZFM	N.C.	17.00	17.00
<i>P235/75R15 All Seasons Steel Belted Radial Ply White Lettered</i> (Maximum Capacity 1843-lbs)				
C1 Series only				
Front				
Without B3J Diesel Equipment	XFN	N.C.	142.00	142.00
With B3J Diesel Equipment	XFN	N.C.	120.00	120.00
Rear				
Without B3J Diesel Equipment	YFN	N.C.	142.00	142.00
With B3J Diesel Equipment	YFN	N.C.	120.00	120.00
Spare				
Without B3J Diesel Equipment	ZFN	N.C.	71.00	71.00
With B3J Diesel Equipment	ZFN	N.C.	60.00	60.00
<i>P235/75R15 On-Off Road Steel Belted Radial Ply White Lettered</i> (Maximum Capacity 1843-lbs)				
K1 Series only				
Front	XEB	N.C.	66.00	66.00
Rear	YEB	N.C.	66.00	66.00
Spare	ZEB	N.C.	33.00	33.00
<i>LR60-15/B Highway Rayon Belted Radial Ply White Lettered</i> (Maximum Capacity 1790-lbs)				
C10703 only. Available only when N67 or PA6 Wheels are specified.				
Front				
Without B3J Diesel Equipment	XTS	N.C.	236.00	236.00
With B3J Diesel Equipment	XTS	N.C.	214.00	214.00
Rear				
Without B3J Diesel Equipment	YTS	N.C.	236.00	236.00
With B3J Diesel Equipment	YTS	N.C.	214.00	214.00
Spare				
Without B3J Diesel Equipment	ZTS	N.C.	118.00	118.00
With B3J Diesel Equipment	ZTS	N.C.	107.00	107.00

(a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

◇ State and local taxes not included.

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1986 model motor vehicles

Description	Option Number	Factory D&H(a)	List Price	MTA's Suggested Retail Price ^o
Tires: (Continued)				
<i>P205/75R15 All Seasons Steel Belted Radial Ply Whitewall</i> (Maximum Capacity 1453-lbs)				
C1 Series only.				
Front				
Without B3J Diesel Equipment	XCG	N.C.	48.00	48.00
With B3J Diesel Equipment	XCG	N.C.	26.00	26.00
Rear				
Without B3J Diesel Equipment	YCG	N.C.	48.00	48.00
With B3J Diesel Equipment	YCG	N.C.	26.00	26.00
Spare				
Without B3J Diesel Equipment	ZCG	N.C.	24.00	24.00
With B3J Diesel Equipment	ZCG	N.C.	13.00	13.00
<i>P205/75R15 On-Off Road Steel Belted Radial Ply Blackwall</i> (Maximum Capacity 1453-lbs)				
C1 Series only				
Rear				
Without B3J Diesel Equipment	YJT	N.C.	42.00	42.00
With B3J Diesel Equipment	YJT	N.C.	20.00	20.00
Spare				
Without B3J Diesel Equipment	ZJT	N.C.	21.00	21.00
With B3J Diesel Equipment	ZJT	N.C.	10.00	10.00
<i>P225/75R15 All Seasons Steel Belted Radial Ply Blackwall</i> (Maximum Capacity 1703-lbs)				
C1 Series only				
Front				
Without B3J Diesel Equipment	XET	N.C.	70.00	70.00
With B3J Diesel Equipment	XET	N.C.	48.00	48.00
Rear				
Without B3J Diesel Equipment	YET	N.C.	70.00	70.00
With B3J Diesel Equipment	YET	N.C.	48.00	48.00
Spare				
Without B3J Diesel Equipment	ZET	N.C.	35.00	35.00
With B3J Diesel Equipment	ZET	N.C.	24.00	24.00
<i>P225/75R15 All Seasons Steel Belted Radial Ply Whitewall</i> (Maximum Capacity 1703-lbs)				
C1 Series only				
Front				
Without B3J Diesel Equipment	XEU	N.C.	104.00	104.00
With B3J Diesel Equipment	XEU	N.C.	82.00	82.00
Rear				
Without B3J Diesel Equipment	YEU	N.C.	104.00	104.00
With B3J Diesel Equipment	YEU	N.C.	82.00	82.00
Spare				
Without B3J Diesel Equipment	ZEU	N.C.	52.00	52.00
With B3J Diesel Equipment	ZEU	N.C.	41.00	41.00
<i>P235/75R15 All Seasons Steel Belted Radial Ply Blackwall</i> (Maximum Capacity 1843-lbs)				
Front				
C1 Series only				
Without B3J Diesel Equipment	XFL	N.C.	96.00	96.00
With B3J Diesel Equipment	XFL	N.C.	74.00	74.00
K1 Series only (Standard)	XFL	NO ADDITIONAL CHARGE		
Rear				
C1 Series only				
Without B3J Diesel Equipment	YFL	N.C.	96.00	96.00
With B3J Diesel Equipment	YFL	N.C.	74.00	74.00
K1 Series only (Standard)	YFL	NO ADDITIONAL CHARGE		
Spare				
C1 Series only				
Without B3J Diesel Equipment	ZFL	N.C.	48.00	48.00
With B3J Diesel Equipment	ZFL	N.C.	37.00	37.00
K1 Series only. (Standard)	ZFL	NO ADDITIONAL CHARGE		

(a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
^o State and local taxes not included.

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1986 model motor vehicles

Description	Option Number	Factory D&H(a)	List Price	MP's Suggested Retail Price◇
Transmissions: (Continued)				
3-Speed Manual. C1 Series only	MM3	NO ADDITIONAL CHARGE		
4-Speed Manual. Standard on C-K2-3 Series. Standard on K1 Series				
C1 Series. Not available when LF3 5.0 Liter or LS9 5.7 Liter Engine is specified. Also not available when YF5 California Emissions is specified				
C1 Series without B3J Diesel Equipment	MM4	N.A.	210.00	210.00
C1 Series with B3J Diesel Equipment	MM4	NO ADDITIONAL CHARGE		
4-Speed Manual with Overdrive. Standard on C1 Series when B3J Diesel Equipment is specified				
C1 Series when gasoline engines are specified.	MM7	N.A.	290.00	290.00
K1 Series only	MM7	N.A.	80.00	80.00
4 Speed Automatic with Overdrive. Not available when C6P H.O. Chassis is specified. C-K1-2 Regular Cab only.	MX0	N.A.	695.00	695.00
Axles, Rear: (See Power Teams Chart for option number selection, availability and complete specifications)				
Optional Ratio		N.A.	36.00	36.00
Locking Differential	G80	N.A.	238.00	238.00
Tires: (See Tire Charts for Tire Availability)				
Spare tire carrier included when spare tire is specified on C-K-2.3 series				
All rim sizes are 6.00" except when N67, N80 or PA6 Wheels are specified on C-K1 Series.				
All rim sizes are 6.50" on C-K2 Series or C-K3 Series without R05 Dual Rear Wheels.				
All rim sizes are 6.00" on C-K3 Series with R05 Dual Rear Wheels.				
Dealer Note: When dual rear tires are specified, R05 Dual Rear Wheels will be applied to the order.				
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTED ON THE INVOICE SEPARATELY.				
For complete specifications and ordering information, see "OTHER OPTIONS" Section.				
TUBELESS				
P195/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1342-lbs)				
C1 Series only. Not available when B3J Diesel Equipment is specified.				
Front (Standard)	XAR	NO ADDITIONAL CHARGE		
Rear (Standard)	YAR	NO ADDITIONAL CHARGE		
Spare (Standard)	ZAR	NO ADDITIONAL CHARGE		
P195/75R15 All Seasons Steel Belted Radial Ply Whitewall (Maximum Capacity 1342-lbs)				
C1 Series only. Not available when B3J Diesel Equipment is specified.				
Front	XAS	N.C.	24.00	24.00
Rear	YAS	N.C.	24.00	24.00
Spare	ZAS	N.C.	12.00	12.00
P195/75R15 Highway Fiberglass Belted Radial Ply Blackwall (Maximum Capacity 1342-lbs)				
C1 Series only. Not available when B3J Diesel Equipment is specified				
Front	XYP	NO ADDITIONAL CHARGE		
Rear	YYP	NO ADDITIONAL CHARGE		
Spare	ZYP	NO ADDITIONAL CHARGE		
P205/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1453-lbs)				
C1 Series only.				
Front				
Without B3J Diesel Equipment	XCE	N.C.	22.00	22.00
With B3J Diesel Equipment	XCE	NO ADDITIONAL CHARGE		
Rear				
Without B3J Diesel Equipment	YCE	N.C.	22.00	22.00
With B3J Diesel Equipment	YCE	NO ADDITIONAL CHARGE		
Spare				
Without B3J Diesel Equipment	ZCE	N.C.	11.00	11.00
With B3J Diesel Equipment	ZCE	NO ADDITIONAL CHARGE		

(a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

◇ State and local taxes not included

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1986 model motor vehicles

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price
Emission Systems: Dealer Note - One of the following emission options must be specified. (See Power Teams Chart for availability and complete specifications).				
California Emission Requirements. Includes all testing, equipment and/or certification necessary for registration in the State of California. Not available when NA6 High Altitude Emissions or L25 4.8 Liter Engine is specified.				
Without LT9 5.7 Liter or LE8 7.4 Liter Engine	YF5	N.A.	235.00	235.00
With LT9 5.7 Liter or LE8 7.4 Liter Engine	YF5	N.A.	(-235.00)	(-235.00)
High Altitude Emission Equipment. Available only when LE9 5.0 Liter, LB1 4.3 Liter, LS9 5.7 Liter engine or B3J Diesel Equipment is specified. Not available when NA5 Standard or YF5 California Emissions is specified.				
	NA6	NO ADDITIONAL CHARGE		
Standard Emission Equipment. Not available when LF3 5.0 Liter Engine on C1 or LS9 5.7 Liter Engine on K1-2 series is specified. Also not available when NA6 High Altitude or YF5 California Emissions are specified				
	NA5	NO ADDITIONAL CHARGE		
Engines: (See Power Teams Chart for availability and complete specifications)				
Gasoline.				
4.3 Liter (262 Cu. In.) 4 BBL V6. C-K1 or C2 Series without C6P H.D. Chassis	LB1	NO ADDITIONAL CHARGE		
4.8 Liter (292 Cu. In.) 1 BBL L6. C-K2 Series with C6P H.D. Chassis or C-K3 Series	L25	NO ADDITIONAL CHARGE		
5.0 Liter (305 Cu. In.) 4 BBL V8. C-K1 or C2 Series only. Not available when C6P H.D. Chassis is specified	LE9	N.A.	465.00	465.00
5.0 Liter (305 Cu. In.) 4 BBL V8. C1 Series only. Available only when YF5 California Emissions Requirements and MX0 Automatic Overdrive Transmission are specified	LF3	N.A.	465.00	465.00
5.7 Liter (350 Cu. In.) 4 BBL V8. Standard on K2 Series without C6P H.D. Chassis. Not available on C1 Series, C2 Bonus and Crew Cab or C-K3 Series				
K1 Series only. Available only when YF5 California Emissions is specified	LS9	N.A.	700.00	700.00
C2 Regular Cab. Available only when YF5 California Emissions Requirements is specified. Not available when C6P H.D. Chassis is specified	LS9	N.A.	700.00	700.00
5.7 Liter (350 Cu. In.) 4 BBL V8. Available on C6P H.D. Chassis, C2 Bonus and Crew Cab or C-K3 Series	LT9	N.A.	670.00	670.00
7.4 Liter (454 Cu. In.) 4 BBL V8. C2-3 or K3 Series only. Available only when UA1 H.D. Battery is specified.				
C2-3 Series only. Available only when N41 Power Steering is specified. C2 Regular Cab also available only when C6P H.D. Chassis is specified	LE8	N.A.	865.00	865.00
K3 Series. Includes K22 94-Amp Generator	LE8	N.A.	865.00	865.00
Diesel.				
6.2 Liter (379 Cu. In.) L.D. V8 Diesel. C-K1-2 Regular Cab only. Not available when C6P H.D. Chassis or YF5 California Emission Requirements is specified. Available only when B3J Diesel Equipment is specified.				
C-K1, 2 Series only	LH6	ADDITIONAL CHARGE		
6.2 Liter (379 Cu. In.) H.D. V8 Diesel. C-K2-3 Series only. Available only when B3J Diesel Equipment is specified. C-K2 Regular Cab also available only when C6P H.D. Chassis is specified	LL4	ADDITIONAL CHARGE		
Transmissions: (See Power Teams Chart for availability and complete specifications).				
3-Speed Automatic.				
C1 Series only. Available only when LE9 5.0 Liter or LB1 4.3 Liter Engine is specified	MX1	N.A.	535.00	535.00
C-K2-3 Series only. C-K2 Regular Cab available only when C6P H.D. Chassis is specified	MX1	N.A.	535.00	535.00

- (a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
 ◇ State and local taxes not included.

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1986 model motor vehicles

Description	Option Number	Factory D&H(s)	List Price	Mfr's Suggested Retail Price◇
Seat Trim: (Continued)				
<i>X**1 Custom Vinyl Bench</i>				
Regular Cab only				
Without Z62 or YE9	...	N.A.	50.00	50.00
With Z62 or YE9	...	NO ADDITIONAL CHARGE		
Bonus Cab only.				
With Z62	...	N.A.	50.00	50.00
With YE9	...	NO ADDITIONAL CHARGE		
Crew Cab only.				
With Z62	...	N.A.	100.00	100.00
With YE9	...	NO ADDITIONAL CHARGE		
Paints, Exterior: (See Interior and Exterior Color Selection Chart for ordering information and paint application).				
Solid	ZY1	NO ADDITIONAL CHARGE		
<i>Conventional Two-Tone.</i>				
Regular Cab only.				
Without YE9. Includes cab back panel applique moldings	ZY2	N.A.	72.00	72.00
With YE9	ZY2	N.A.	43.00	43.00
Bonus Cab or Crew Cab only.				
Without YE9. Includes cab back panel applique moldings	ZY2	N.A.	89.00	89.00
With YE9	ZY2	N.A.	60.00	60.00
<i>Special Two-Tone. Fleetside only.</i>				
Regular Cab only.				
Without Z62 or YE9. Includes YG1 Custom Molding Package	ZY3	N.A.	327.00	327.00
With Z62	ZY3	N.A.	198.00	198.00
With YE9	ZY3	N.A.	170.00	170.00
Bonus Cab or Crew Cab only.				
Without Z62 or YE9. Includes YG1 Custom Molding Package	ZY3	N.A.	333.00	333.00
With Z62	ZY3	N.A.	204.00	204.00
With YE9	ZY3	N.A.	176.00	176.00
<i>Deluxe Two-Tone. Fleetside only.</i>				
Regular Cab only.				
Without Z62 or YE9. Includes YG1 Custom Molding Package.	ZY4	N.A.	370.00	370.00
With Z62	ZY4	N.A.	241.00	241.00
With YE9	ZY4	N.A.	184.00	184.00
Bonus Cab or Crew Cab only.				
Without Z62 or YE9. Includes YG1 Custom Molding Package	ZY4	N.A.	385.00	385.00
With Z62	ZY4	N.A.	256.00	256.00
With YE9	ZY4	N.A.	199.00	199.00
<i>Exterior Decor Package. Fleetside only. Not available when R05 Dual Rear Wheels is specified. Includes dual-tone body side and rear decal striping. Also includes hood ornament when B3J Diesel Equipment is not specified.</i>				
Regular Cab only				
Without Z62 or YE9. Includes YG1 Custom Molding Package	ZY5	N.A.	575.00	575.00
With Z62	ZY5	N.A.	446.00	446.00
With YE9	ZY5	N.A.	418.00	418.00
Bonus Cab or Crew Cab only.				
Without Z62 or YE9. Includes YG1 Custom Molding Package	ZY5	N.A.	575.00	575.00
With Z62	ZY5	N.A.	446.00	446.00
With YE9	ZY5	N.A.	418.00	418.00
<i>Special Big Dooley Two-Tone. Fleetside only. Available only when R05 Dual Rear Wheels are specified. Includes dual-tone body side and rear decal striping. Also includes hood ornament when B3J Diesel Equipment is not specified.</i>				
Without Z62	ZY9	N.A.	444.00	444.00
With Z62	ZY9	N.A.	426.00	426.00

- (a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
 ◇ State and local taxes not included.

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1986 model motor vehicles

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price
Silverado/Sierra Classic: Available only when custom cloth or custom vinyl seats are specified. Includes bright side marker lamp bezels, nameplates on front fenders, bright windshield and rear window moldings, color-keyed carpeting for front seat area, plastic door trim panels with storage pockets and bright brushed-finish accents, V22 Deluxe Front Appearance, nameplate on deluxe instrument panel, U37 Cigarette Lighter, visor vanity mirror, custom steering wheel, headliner, C91 Dome Lamp, cab back insulation, Z53 Voltmeter, Temperature and Oil Pressure Gages, dual horns and special insulation.				
Stepside only. Also includes cab back panel applique molding				
Regular Cab only	YE9	N.A.	671.00	671.00
Fleetside only. Also includes bright taillight trim.				
Without R05 Dual Rear Wheels.				
Regular Cab only.				
Without ZY5 Exterior Decor Package. Also includes cab back panel applique molding, YG3 Deluxe Molding Package and tailgate applique.	YE9	N.A.	855.00	855.00
With ZY5 Exterior Decor Package	YE9	N.A.	826.00	826.00
Bonus Cab only.				
Without ZY5 Exterior Decor Package. Also includes cab back panel applique molding	YE9	N.A.	933.00	933.00
With ZY5 Exterior Decor Package	YE9	N.A.	904.00	904.00
Crew Cab only. Also includes rear seat area carpeting				
Without ZY5 Exterior Decor Package. Also includes cab back panel applique molding	YE9	N.A.	1016.00	1016.00
With ZY5 Exterior Decor Package	YE9	N.A.	987.00	987.00
With R05 Dual Rear Wheels.				
Regular Cab only.				
Without ZY9 Big Dooley Special Two-Tone Paint. Also includes cab back panel applique molding	YE9	N.A.	699.00	699.00
With ZY9 Big Dooley Special Two-Tone Paint	YE9	N.A.	653.00	653.00
Bonus Cab only. Also includes cab back insulation				
Without ZY9 Big Dooley Special Two-Tone Paint. Also includes cab back panel applique molding	YE9	N.A.	777.00	777.00
With ZY9 Big Dooley Special Two-Tone Paint	YE9	N.A.	731.00	731.00
Crew Cab only. Also includes rear seat area carpeting and cab back insulation				
Without ZY9 Big Dooley Special Two-Tone Paint. Also includes cab back panel applique molding	YE9	N.A.	860.00	860.00
With ZY9 Big Dooley Special Two-Tone Paint	YE9	N.A.	814.00	814.00
Seat Trim: (See Interior and Exterior Color Selection Chart for availability and ordering information).				
V**1 Vinyl Bench				NO ADDITIONAL CHARGE
C**1 Deluxe Cloth Bench. Regular Cab only. Not available when YE9 is specified				
Without Z62		N.A.	67.00	67.00
With Z62		N.A.	17.00	17.00
L**1 Custom Cloth Bench				
Regular Cab only. Available only when YE9 is specified				NO ADDITIONAL CHARGE
Bonus Cab only. Available only when Z62 or YE9 is specified.				
With Z62		N.A.	50.00	50.00
With YE9				NO ADDITIONAL CHARGE
Crew Cab only. Available only when Z62 or YE9 is specified.				
With Z62		N.A.	100.00	100.00
With YE9				NO ADDITIONAL CHARGE

(a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon
 ◇ State and local taxes not included.

C-K PICKUP

1986 VEHICLES WITH STANDARD EQUIPMENT

Prices shown are effective with initial shipments of 1986 model motor vehicles

Description	Model Number	Body Code	Wheel Base	Factory D&H(a)	List Price	Mfr's Suggested Retail Price★	Group Number
◆ 8-Cylinder 6.2 Liter (379 Cu. In.) H.D. Diesel V8 Engine-Engine Ordering Code LL4							
C20 Series H.D. Chassis 2-Wheel Drive							
Stepside (8-ft)	CC20903	E62 & C6P & B3J	131.5"	3.76	12126.00	12129.76	17
Fleetside (8-ft)	CC20903	E63 & C6P & B3J	131.5"	3.76	11987.00	11990.76	17
C20 Series 2-Wheel Drive							
Bonus Cab	CC20943	E63 & YG4 & B3J	164.5"	3.76	12984.00	12987.76	17
Crew Cab	CC20943	E63 & AS3 & B3J	164.5"	3.76	13332.00	13335.76	17
C30 Series 2-Wheel Drive							
Stepside (8-ft)	CC30903	E62 & B3J	131.5"	3.76	12275.00	12278.76	17
Fleetside (8-ft)	CC30903	E63 & B3J	131.5"	3.76	12136.00	12139.76	17
Bonus Cab	CC30943	E63 & YG4 & B3J	164.5"	3.76	13072.00	13075.76	17
Crew Cab	CC30943	E63 & AS3 & B3J	164.5"	3.76	13527.00	13530.76	17
K20 Series H.D. Chassis 4-Wheel Drive							
Stepside (8 ft)	CK20903	E62 & C6P & B3J	131.5"	3.76	13725.00	13728.76	17
Fleetside (8-ft)	CK20903	E63 & C6P & B3J	131.5"	3.76	13584.00	13587.76	17
K30 Series 4-Wheel Drive							
Fleetside (8-ft)	CK30903	E63 & B3J	131.5"	3.76	14511.00	14514.76	17
Bonus Cab	CK30943	E63 & YG4 & B3J	164.5"	3.76	15432.00	15435.76	17
Crew Cab	CK30943	E63 & AS3 & B3J	164.5"	3.76	15786.00	15789.76	17

★ Manufacturer's Suggested Retail Prices do not include applicable destination charges, state and local taxes, license fees, optional equipment or special items or services.

◆ Refer to Dealer Order Guide for California Requirements.

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1986 model motor vehicles

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price◇
Scottsdale/High Sierra: (See Interior and Exterior Color Selection Charts) Available only when deluxe cloth or custom vinyl seats are specified on Regular Cab. Includes bright rear window and windshield moldings, bright side marker lamp bezels, nameplates on front fenders and instrument panel, U37 Cigarette Lighter, dual horns, cab back insulation, C91 Dome Lamp, special insulation and color-keyed vinyl coated floor mat.				
Stepside only. Also includes plastic door trim panels	262	N.A.	250.00	250.00
Fleetside only. Also includes bright taillight trim.				
Without R05 Dual Rear Wheels.				
Regular Cab only. Also includes plastic door trim panels				
Without YJ6 Value Decor Package. Also includes				
B84 Black Side Moldings.	262	N.A.	370.00	370.00
With YJ6 Value Decor Package	262	N.A.	255.00	255.00
Bonus Cab only	262	N.A.	332.00	332.00
Crew Cab only	262	N.A.	341.00	341.00
With R05 Dual Rear Wheels.				
Regular Cab only. Also includes plastic door trim panels	262	N.A.	259.00	259.00
Bonus Cab only	262	N.A.	221.00	221.00
Crew Cab only	262	N.A.	230.00	230.00

(a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

◇ State and local taxes not included.

C-K PICKUP

2-WHEEL DRIVE (4900-lb - 10,000-lb GVW)

4-WHEEL DRIVE (6100-lb - 10,000-lb GVW)

1986 VEHICLES WITH STANDARD EQUIPMENT

Prices shown are effective with initial shipments of 1986 model motor vehicles

Description	Model Number	Body Code	Wheel Base	Factory D&H(a)	List Price	Manufacturer's Suggested Retail Price★	Group Number
<i>(All models have regular cab unless otherwise indicated)</i>							
◆ 6-Cylinder 4.3 Liter (262 Cu. In.) 4 BBL V6 Gasoline Engine-Engine Ordering Code LB1							
C10 Series 2-Wheel Drive							
Stepside (6 1/2 ft)	CC10703	E62	117.5"	N.A.	7904.00	7904.00	17
Fleetside (6 1/2-ft)	CC10703	E63	117.5"	N.A.	7764.00	7764.00	17
Fleetside (8-ft)	CC10903	E63	131.5"	N.A.	7938.00	7938.00	17
C20 Series 2-Wheel Drive							
Stepside (8-ft)	CC20903	E62	131.5"	N.A.	9253.00	9253.00	17
Fleetside (8-ft)	CC20903	E63	131.5"	N.A.	9113.00	9113.00	17
K10 Series 4-Wheel Drive							
Stepside (6 1/2-ft)	CK10703	E62	117.5"	N.A.	10465.00	10465.00	17
Fleetside (6 1/2-ft)	CK10703	E63	117.5"	N.A.	10324.00	10324.00	17
Fleetside (8-ft)	CK10903	E63	131.5"	N.A.	10601.00	10601.00	17
◆ 6-Cylinder 4.8 Liter (292 Cu. In.) 1 BBL L6 Gasoline Engine-Engine Ordering Code L25							
C20 Series H.D. Chassis 2-Wheel Drive							
Stepside (8-ft)	CC20903	E62 & C6P	131.5"	3.76	10241.00	10244.76	17
Fleetside (8-ft)	CC20903	E63 & C6P	131.5"	3.76	10102.00	10105.76	17
C20 Series 2-Wheel Drive							
Bonus Cab	CC20943	E63 & YG4	164.5"	3.76	11099.00	11102.76	17
Crew Cab	CC20943	E63 & AS3	164.5"	3.76	11447.00	11450.76	17
C30 Series 2-Wheel Drive							
Stepside (8-ft)	CC30903	E62	131.5"	3.76	10377.00	10380.76	17
Fleetside (8-ft)	CC30903	E63	131.5"	3.76	10238.00	10241.76	17
Bonus Cab	CC30943	E63 & YG4	164.5"	3.76	11278.00	11281.76	17
Crew Cab	CC30943	E63 & AS3	164.5"	3.76	11629.00	11632.76	17
K20 Series H.D. Chassis 4-Wheel Drive							
Stepside (8-ft)	CK20903	E62 & C6P	131.5"	3.76	11957.00	11960.76	17
Fleetside (8-ft)	CK20903	E63 & C6P	131.5"	3.76	11816.00	11819.76	17
K30 Series 4-Wheel Drive							
Fleetside (8 ft)	CK30903	E63	131.5"	3.76	13007.00	13010.76	17
Bonus Cab	CK30943	E63 & YG4	164.5"	3.76	13928.00	13931.76	17
Crew Cab	CK30943	E63 & AS3	164.5"	3.76	14282.00	14285.76	17
◆ 8-Cylinder 5.7 Liter (350 Cu. In.) 4 BBL V8 Gasoline Engine-Engine Ordering Code LS9							
K20 Series 4-Wheel Drive							
Stepside (8-ft)	CK20903	E62	131.5"	N.A.	11422.00	11422.00	17
Fleetside (8-ft)	CK20903	E63	131.5"	N.A.	11280.00	11280.00	17
◆ 8-Cylinder 6.2 Liter (379 Cu. In.) L.D. Diesel V8 Engine-Engine Ordering Code LH6							
C10 Series 2-Wheel Drive							
Stepside (6 1/2-ft)	CC10703	E62 & B3J	117.5"	N.A.	10907.00	10907.00	17
Fleetside (6 1/2-ft)	CC10703	E63 & B3J	117.5"	N.A.	10768.00	10768.00	17
Fleetside (8-ft)	CC10903	E63 & B3J	131.5"	N.A.	10941.00	10941.00	17
C20 Series 2-Wheel Drive							
Stepside (8-ft)	CC20903	E62 & B3J	131.5"	N.A.	11818.00	11818.00	17
Fleetside (8-ft)	CC20903	E63 & B3J	131.5"	N.A.	11678.00	11678.00	17
K10 Series 4-Wheel Drive							
Stepside (6 1/2-ft)	CK10703	E62 & B3J	117.5"	N.A.	12817.00	12817.00	17
Fleetside (6 1/2 ft)	CK10703	E63 & B3J	117.5"	N.A.	12675.00	12675.00	17
Fleetside (8-ft)	CK10903	E63 & B3J	131.5"	N.A.	12853.00	12853.00	17
K20 Series 4-Wheel Drive							
Stepside (8-ft)	CK20903	E62 & B3J	131.5"	N.A.	13674.00	13674.00	17
Fleetside (8-ft)	CK20903	E63 & B3J	131.5"	N.A.	13532.00	13532.00	17

- ★ Manufacturer's Suggested Retail Prices do not include applicable destination charges, state and local taxes, license fees, optional equipment or special items or services.
- ◆ Refer to Dealer Order Guide for California Requirements.

MODELS CONTINUED ON FOLLOWING PAGE

(a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

C/K PICKUPS

THE FOLLOWING EQUIPMENT IS STANDARD ON DIESEL ENGINE MODELS (ALSO SEE STANDARD SPECIFICATIONS PAGES)

- Low Coolant Sensor
- Poly-wrapped Paper Element Air Cleaner
- Auxiliary Engine Oil Cooler provided with 4.56 ratio rear axle (in addition to cooler in radiator tank)
- Power Steering
- Engine Block Heater
- Water/fuel separator unit which incorporates a water sensor and sending unit, a fuel filter, a fuel heater and water drain capability
- Hydraulic Power-assisted Brakes
- K81 66-amp Generator
- Engine Oil Cooler (located in radiator tank)
- Dual 550 Cold Cranking Amp/115 min. Reserve Capacity Batteries
- HD Radiator
- Dual Exhaust System
- Additional Insulation:
 - Cab-to-fender insulators
 - Fiberglass hood insulator
 - Fiberglass engine compartment firewall insulator
 - Cowl side spray-on deadener
 - Driver compartment dash mat with increased mastic layer
 - Resinated cotton and mastic floor insulation
 - Full cowl interior trim panels with resinated cotton insulation
 - Vinyl-coated rubber floor mat for regular cab models
- Warning Lights: Glow Plugs, Water-in-fuel (or fuel filter), and Low Coolant
- Diesel Engine Identification:
 - Hood ornament
 - Fender nameplates
 - Tailgate nameplate (Fleetside/Wideside models only)
 - "Diesel Fuel Only" filler cap and label

NOTES

C/K PICKUP

GVWR SELECTOR—ALL STATES

GVW Rating (lbs)	†GAWR (lbs)		Minimum Equipment Required for GVW Rating		
			Tire Capacity (lbs ea)		Chassis Equipment
	Front	Rear	Front	Rear	
C30/3500 SERIES REGULAR CAB					
9000	3800	6084	2623	3042	Standard
•10,000	3800	7056	1940	1764 (Duals)	Dual Rear Wheel Provisions (R05)
C30/3500 SERIES BONUS CAB AND CREW CAB					
9000	4000	6084	2623	3042	Standard
•9600	4000	6084	2623	3042	Camper Special Chassis Equipment (Z81)
•10,000	3880	7500	1940	2105 (Duals)	Dual Rear Wheel Provisions (R05)
K30/3500 SERIES REGULAR CAB					
9200	4500	6084	2623	3042	Standard
•10,000	4500	7500	2315	2105 (Duals)	Dual Rear Wheel Provisions (R05)
K30/3500 SERIES BONUS CAB AND CREW CAB					
9200	4500	6084	2623	3042	Standard
•10,000	4500	7500	2315	2105 (Duals)	Dual Rear Wheel Provisions (R05)

†GAWR's shown are the maximum for each axle with equipment listed. Other GAWR's are available, and they are determined as the minimum capacity of either axle, springs or tires.

•Requires V8 engine.

*Fleetside/Wideside Pickups only

FRONT AND REAR TIRE AVAILABILITY CHART—ALL STATES

C-K30/3500 SERIES

Spare tire to match either front or rear tires is available at extra cost
K30/3500 models require matching front and rear tread

Description	Capacity (lbs each)		Highway			On-Off Road			Spare
	Front/ Single Rear	Dual Rear	Front	Single Rear	Dual Rear	*Front	Single Rear	Dual Rear	
TUBELESS Steel Belted Radial									
♦LT215/85R16C	1940	1764	XYJ	—	YYJ	—	—	—	ZYJ
#LT215/85R16C	1940	—	XYJ	—	—	—	—	—	—
•LT215/85R16D	—	2105	—	—	YYK	—	—	YYL YYL	ZYK ZYL ZYK
LT215/85R16D	2315	2105	XYK — —	— — —	YYK — —	— *XYL —	— — —	— YYL #YYL	ZYK ZYL #ZYK
LT235/85R16D	2623	—	XYM	—	—	—	—	—	—
LT235/85R16E	3042	— —	XYN —	YYN —	— —	— *XYT	— †YYT	— —	— ZYN †ZYT
TUBE-TYPE Nylon									
♦7.50-16C	2060	1815	XPB — —	— — —	YPB — —	— — —	— — —	— YPC YPC	ZPB ZPC ZPB
#7.50-16C	2060	—	XPB	—	—	—	—	—	—
#7.50-16D	—	2140	— — —	— — —	YPF — —	— — —	— — —	— YPG YPG	— ZPF ZPG ZPF
7.50-16D	2440	2140	XPF — —	— — —	YPF — —	— *XPG —	— — —	— YPG #YPG	ZPF ZPG #ZPF

•C3 models only.

*On-Off road front tires available on K3 models only.

†K3 models only.

♦C30903 models only.

C/K PICKUP

GVWR SELECTOR—ALL STATES

GVW Rating (lbs)	†GAWR (lbs)		Minimum Equipment Required for GVW Rating		
			Tire Capacity (lbs ea)		Chassis Equipment
	Front	Rear	Front	Rear	
C20/2500 SERIES REGULAR CAB					
6400	3500	3880	1940	1940	Standard
7200	3500	4630	1940	2315	HD Rear Springs (G50)
C20/2500/C6P SERIES REGULAR CAB					
8600	3800	6000	2623	3042	Standard
K20/2500 SERIES REGULAR CAB					
6600	3700	3880	1940	1940	Standard
K20/2500/C6P SERIES REGULAR CAB					
8600	3700	6000	2623	3042	Standard
C20/2500 SERIES BONUS AND CREW CAB					
8600	3800	6000	2623	3042	Standard

†GAWR's shown are the maximum for each axle with equipment listed. Other GAWR's are available, and they are determined as the minimum capacity of either axle, springs or tires.

FRONT AND REAR TIRE AVAILABILITY CHART—ALL STATES

C-K20/2500 SERIES

Spare tire to match either front or rear tires is available at extra cost
K20/2500 models require matching front and rear tread

Description	Capacity (lbs ea)	Highway		On-Off Road		Spare
		Front	Rear	*Front	Rear	
TUBELESS (Requires LB1, LE9, LH6 or LS9 engine.)						
7.50R-16D Steel Belted Radial	2440	XWY — —	YWY — —	— *XWX —	— YWX =YWX	ZWY ZWX #ZWY
LT 215/85R160 Steel Belted Radial	1940	XYJ	YYJ	—	—	ZYJ
LT 215/85R160 Steel Belted Radial	1940	XYJ	—	—	—	—
LT 215/85R16D Steel Belted Radial	2315	— — —	YYK — —	— — —	— =YYL =YYL	ZYK #ZYL #ZYK
LT 215/85R16D Steel Belted Radial	2315	XYK — —	YYK — —	— *XYL —	— YYL =YYL	ZYK ZYL #ZYK
LT 235/85R16D Steel Belted Radial	2623	XYM	YYM	—	—	ZYM
ALT 235/85R16E Steel Belted Radial	3042	XYN	YYN	—	—	ZYN
TUBELESS (Requires LE8, LT9, LL4 or L25 engine.)						
LT 235/85R16D Steel Belted Radial	2623	XYM	—	—	—	—
LT 235/85R16E Steel Belted Radial	3042	— —	YYN —	— —	— #YYT =YYT	ZYN ZYT
LT 235/85R16E Steel Belted Radial	3042	XYN — —	YYN — —	— *XYT —	— YYT #YYT	ZYN ZYT #ZYN

*On-Off road front tires available on K2 models only.

#Not available on K2 models.

▲Available on K2 models only.

C/K PICKUP

GVWR SELECTOR—ALL STATES

GVWR Rating (lbs)	+GAWR (lbs)		Minimum Equipment Required for GVW Rating		
	Front	Rear	Tire Capacity (lbs ea)		Chassis Equipment
			Front	Rear	
C10/C1500 SERIES					
●4900	2684	2684	1342	1342	Standard
■5200	2906	2906	1453	1453	■Power Brakes (J50)
5600	★2950	3406	1703	1703	HD Rear Springs (G50); ■Power Brakes (J50)
6100	★3250	3686	1843	1843	Extra Capacity Rear Springs (G51); HD Power Brakes (J55)
K10/K1500 SERIES					
6100	3550	3550	1775	1775	Standard

+GAWR's shown are the maximum for each axle with equipment listed. Other GAWR's are available, and they are determined as the minimum capacity of either axle, springs or tires.

●Not available on diesel engine models.

■Standard on diesel engine models.

★Rated 3400 lbs. for diesel engine models.

FRONT AND REAR TIRE AVAILABILITY CHART—ALL STATES

C-K10/1500 SERIES

**Spare tire to match either front or rear tires must be ordered
K10/1500 models require matching front and rear tread**

Description	Capacity (lbs ea)	Highway		On-Off Road		Spare
		Front	Rear	*Front	Rear	
TUBELESS						
♦♦P195/75R15 Steel Belted Radial	1342	XAR	YAR	—	—	ZAR
♦♦P195/75R15 White Wall Steel Belted Radial	1342	XAS	YAS	—	—	ZAS
♦♦P195/75R15 Fiberglass Belted Radial	1342	XYP	YYP	—	—	ZYP
♦P205/75R15 Steel Belted Radial	1453	XCE	YCE	—	—	ZCE
♦P205/75R15 White Wall Steel Belted Radial	1453	XCG	YCG	—	YJT	ZJT
♦P225/75R15 Steel Belted Radial	1703	XET	YET	—	—	ZET
♦P225/75R15 White Wall Steel Belted Radial	1703	XEU	YEU	—	—	ZEU
P235/75R15 Steel Belted Radial	1843	XFL	YFL	—	—	ZFL
P235/75R15 White Wall Steel Belted Radial	1843	XEM	YEM	*XES	YES	ZES
P235/75R15 White Letter Steel Belted Radial	1843	*XFN	*YFN	—	—	*ZFN
%LR60-15B White Letter Rayon Belted Radial	1790	XTS	YTS	*XEB	*YEB	*ZEB
▲31 x 10.50R15LT/B Steel Belted Radial	1775	—	—	*XUY	*YUY	*ZUY
▲31 x 10.50R15LT/B White Letter Steel Belted Radial	1775	—	—	*XUZ	*YUZ	*ZUZ

*Available on C1 models only.

♦Not available with B3J Diesel Equipment.

*Available on K1 models only.

%Available on C10703 only. Requires N67, N90 or PA6 wheels.

▲Requires N67, N90 or PA6 wheels.

C/K PICKUP

POWER TEAMS

ALL STATES

C-K30/3500 SERIES

POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE)
(Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

W/NA5 STANDARD (Satisfies High Altitude Emission Requirements), NA6 HIGH ALTITUDES OR YF5 CALIFORNIA EMISSIONS

ENGINE	TRANSMISSION		AXLES				GVWR	
	4-SP	AUTO		#3.21	3.73	4.10	4.56	
-C30903								
SL25 L6 4.8 Liter (292-188L)	MM4			—	—	GQ1	HC4	9000
		MX1		—	—	—	GQ1	9000
SLT9 V8 5.7 Liter (350-488L)	MM4			—	GQ1	GT5	HC4	9000
		MX1		—	—	GQ1	HC4	9000
	MM4	%MX1		—	—	GQ1	HC4	#10000
SL25 V8 7.4 Liter (454-488L) (Reqs N41 & UA1)	MM4	MX1		#GQ1	GT4	GT5	*HC4	9000
	MM4	%MX1		—	GQ1	GT5	*HC4	#10000
LL4 Diesel 6.2 Liter V8 (379 Cu In) (Reqs B3J)	MM4	MX1		—	—	GQ1	HC4	9000
	MM4	%MX1		—	—	GQ1	HC4	#10000
-C30943								
SL25 L6 4.8 Liter (292-188L)	MM4			—	—	GQ1	HC4	9000
		MX1		—	—	—	GQ1	9000
SLT9 V8 5.7 Liter (350-488L)	MM4			—	GQ1	GT5	HC4	9000
		MX1		—	—	GQ1	HC4	9000
	MM4	MX1		—	—	GQ1	HC4	9600
	MM4	%MX1		—	—	GQ1	HC4	#10000
SL25 V8 7.4 Liter (454-488L) (Reqs UA1 & N41)	MM4	MX1		#GQ1	GT4	GT5	*HC4	90/9600
	MM4	%MX1		—	GQ1	GT5	*HC4	#10000
LL4 Diesel 6.2 Liter V8 (379 Cu In) (Reqs B3J)	MM4	MX1		—	—	GQ1	HC4	90/9600
	MM4	%MX1		—	—	GQ1	HC4	#10000
-K30903								
SL25 L6 4.8 Liter (292-188L)	MM4	MX1		—	—	—	GQ1	9200
				—	—	—	GQ1	#10000
SLT9 V8 5.7 Liter (350-488L)	MM4			—	GQ1	GT5	HC4	9200
		MX1		—	—	GQ1	HC4	9200
	MM4	%MX1		—	—	GQ1	HC4	#10000
SL25 V8 7.4 Liter (454-488L) (Reqs UA1)	MM4	MX1		—	GQ1	GT5	*HC4	9200
	MM4	%MX1		—	GQ1	GT5	*HC4	#10000
LL4 Diesel 6.2 Liter V8 (379 Cu In) (Reqs B3J)	MM4	MX1		—	—	GQ1	HC4	9200
	MM4	%MX1		—	—	GQ1	HC4	#10000
-K30943								
SL25 L6 4.8 Liter (292-188L)	MM4	MX1		—	—	—	GQ1	9200
	MM4	MX1		—	—	—	GQ1	#10000
SLT9 V8 5.7 Liter (350-488L)	MM4			—	GQ1	GT5	HC4	9200
		MX1		—	—	GQ1	HC4	9200
	MM4	%MX1		—	—	GQ1	HC4	#10000
SL25 V8 7.4 Liter (454-488L) (Reqs UA1)	MM4	MX1		—	GQ1	GT5	*HC4	9200
	MM4	%MX1		—	GQ1	GT5	*HC4	#10000
LL4 Diesel 6.2 Liter V8 (379 Cu In) (Reqs B3J)	MM4	MX1		—	—	GQ1	HC4	9200
	MM4	%MX1		—	—	GQ1	HC4	#10000

%Reqs V02 Cooler
#N/A G80 Locking Differential
*W/MX1 Trans and C80 Air Reqs KC4 Cooler

#N/A YF5 California Emissions or NA6 High Altitude Emissions.
With NA5 Emissions Satisfies High Altitude Requirements.
##N/A NA6 High Altitude Emissions. With NA5 Emissions Satisfies High Altitude Requirements


**High Altitude Emission Equipment (FOR EXHAUST SMOKE REDUCTION PURPOSES)
AT HIGH ALTITUDE; NOT REQUIRED TO SATISFY HIGH ALTITUDE EMISSION REGULATIONS. (REQS LL4 ENG)**

1986 GENERAL MOTORS CORPORATION

INFORMATION REGARDING

CONSUMER INFORMATION TRUCK-CAMPER LOADING

PUBLISHED MAY, 1985

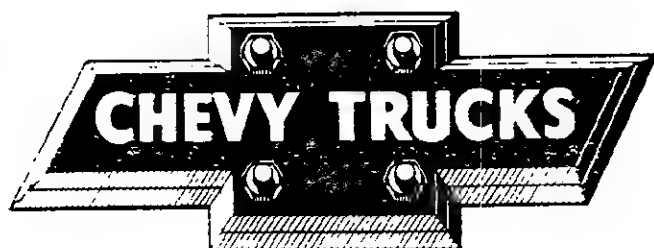

CHEVROLET MOTOR DIVISION
GENERAL MOTORS CORPORATION
WARREN, MICHIGAN 48090



GMC TRUCK & COACH OPERATIONS
GENERAL MOTORS CORPORATION
PONTIAC, MICHIGAN 48058

1986 GENERAL MOTORS TRUCKS

Consumer Information

Truck - Camper Loading

CONSUMER INFORMATION REGULATION 575.103 issued by the National Highway Traffic Safety Administration requires manufacturers of trucks capable of accommodating slide-in camper bodies to provide information concerning proper load and proper installation in truck camper applications.

This Consumer Information booklet is designed to provide basic information relating to load capabilities of 1986 General Motors Truck models which are adaptable to slide-in camper applications. Information contained herein is applicable to the truck buyer that is considering a 1986 General Motors Truck or the prospective truck purchaser.

See the General Motors Corporation Light-Duty Truck Facts Data Book for additional information required to completely spec out your vehicle for the proper slide-in camper accommodation.

The Regulation also requires that proper truck-camper loading information is to be maintained in truck dealerships and be made available to all prospects on request. This booklet relates to the 1986 General Motors Truck models recommended for slide-in camper applications and is to be used as a consumer information piece.

Product specifications or data contained herein may change periodically. When a revision of this booklet is supplied to truck dealers, it is the dealers' responsibility to make the revised information available to the public.


All illustrations and specifications contained in this literature are based on the latest product information available at the time of publication approval. The right is reserved to make changes at any time in prices, colors, materials, equipment, specifications and models and also to discontinue models.

TRUCK-CAMPER LOADING

Vehicle Information Regulation 175.13 requires that the truck chassis that would accommodate slide-in campers to specify the vehicle's Gross Weight Rating (GWR) and the longitudinal limits within which the center of gravity for the cargo weight rating should be located.

Cargo Weight Rating (CWR)—The cargo weight rating of a vehicle means the value specified by the manufacturer as the cargo-carrying capacity of a vehicle, in pounds, exclusive of (minus) the weight of occupants, computed as 150 pounds times the number of designated seating positions.

Longitudinal Center of Gravity Zone for CWR (CG)—The forward limit of the recommended CG Zone is determined by the application of dimension "A" measured in inches from the rear of the truck bed. The rearward limit of the recommended CG Zone is established by application of dimension "B" also measured in inches from the rear of the truck bed. The recommended CG Zone lies between these points.

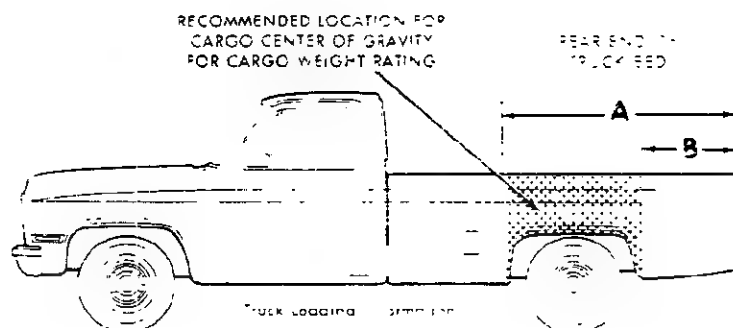

Model _____

Calculated
Cargo Weight Rating _____

Dimension A _____

Dimension B _____

Limitations on Recommended CG Zones

FORWARD LIMIT

1. Must not extend beyond the inside surface (dimension IL shown on line drawings) of the pickup box.
2. Must not exceed the front gross axle weight rating (GAWR).

REARWARD LIMIT


1. Must be no farther rearward than the inside surface (dimension IL shown on line drawing) of the pickup box.
2. Must not exceed the gross axle weight rating on the rear axle.
3. On S T-10 15 and Series C K-10 1600 trucks the rear axle loading is limited to 52% of the vehicle's Gross Vehicle Weight Rating (GVWR).
4. On Series C K-20 1600 and C K-30 1600 trucks the rear axle loading is limited to 70% of the vehicle's Gross Vehicle Weight Rating (GVWR).

Vehicle (CG) Identification—All General Motors Corporation trucks that may be suitable for carrying a slide-in camper incorporate a Truck-Camper Loading information label located on the inside of the glove box door on C K models or on the trailing edge of the driver's door on S T-10 15 models. The vehicle identification number (VIN), the manufacturer's cargo weight rating (CWR) of that vehicle plus the CG limits of dimension "A" and "B" of that vehicle in inches are included.

Vehicle and Truck-Camper Loading are first discussed at length in the first few pages of the Vehicle Owner's Manual.

TRUCK—CAMPER LOADING

Loading Instructions—When the truck is used to carry a slide-in camper, the cargo load of the truck consists of the manufacturer's camper weight, the weight of installed additional camper equipment not included in the manufacturer's camper weight figure, the weight of camper cargo and the weight of passengers in the camper. The total cargo load should not exceed the truck's weight rating (CWR) and the camper's center of gravity should fall within the truck's recommended center of gravity zone when installed.

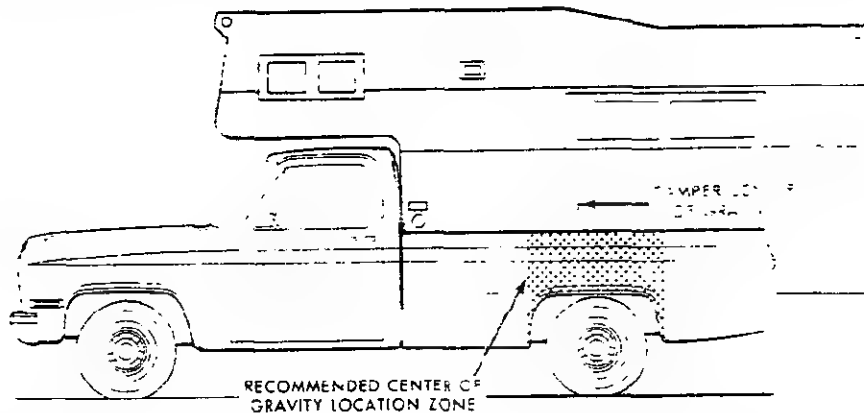

Any accessories or other equipment added to this vehicle after its manufacture must be weighed or have their weight determined and added to the truck's weight. The total weight must not exceed the prescribed cargo weight rating (CWR) of this vehicle. This will decrease the permissible longitudinal zone of the center of gravity for this vehicle.

The longitudinal center of gravity zone has been determined for the full cargo weight rating of this truck. If a slide-in camper has a total weight less than the truck's weight rating (CWR), the permissible longitudinal zone of the center of gravity may be larger. However, individual axle loads should not exceed either the truck's or the camper's gross axle weight ratings (GAWR).

To help prevent weight transfer to the camper, the truck should be loaded, driven, and towed so that the weight is distributed evenly on the front wheels separately to determine the axle loads. Individual axle loads should not exceed either of the gross axle weight ratings (GAWR). The total axle loads should not exceed the gross vehicle weight rating (GVWR). GVWR is given on the vehicle identification plate and on the vehicle certificate of title. It is located on the left side of the vehicle, near the front door, next to the driver. If weight ratings are exceeded, it may result in damage to the vehicle and could make the vehicle unsafe to drive.

CAUTION: The longitudinal center of gravity is only one of the factors that may affect the overall performance of a vehicle, including handling, braking, and steering. The recommended longitudinal limits for the camper's weight are based on the assumption that the vehicle will be operated with reasonable prudence in light of all of the existing conditions. Failure to do so may result in a decrease in factory vehicle performance and could make the vehicle unsafe to drive.

In this connection, refer to any recommendations of the manufacturer's instructions regarding installation and loading of the camper.

TRUCK-CAMPER LOADING

DEFINITION OF TERMS

For the purposes of calculating Truck-Camper Loading in this book, listed below are some common terms and abbreviations:

Cargo Weight Rating (CWR)—means the value specified by the vehicle manufacturer as the cargo carrying capacity in pounds, or a vehicle (exclusive of minus) the weight of occupants, computed as 150 pounds times the number of designated seating positions.

Center of Gravity (CG)—Point where the mass of a body is concentrated and if suspended at that point would balance front and rear.

Curb Weight—Weight of a vehicle without driver, passengers or cargo but including fuel, coolant and other items of standard equipment.

Dimension A & B—Center of Gravity (CG) zone.

Gross Vehicle Weight Rating or "GVWR" means the value specified by the manufacturer as the loaded weight of a single vehicle.

Gross Axle Weight Rating or "GAWR" means the value specified by the vehicle manufacturer as the load carrying capacity of a single axle system measured at the tire ground interfaces.

Model Weight—Weight of the vehicle with all items of standard equipment, 150 pounds per passenger in each designated seating position and maximum capacity of fuel, oil and coolant.

Payload Rating—is the maximum allowable load including the weight of the driver and all occupants that the vehicle can carry based on all factory installed equipment on the vehicle.

Slide-in Camper—means a camper having a roof, floor, and sides, designed to be mounted on and removed from the cargo area of a truck by the user.

Weight Distribution—The amount of a vehicle's weight that rests on each axle.

Wheelbase (WB)—The distance from the center line of the front axle to the center line of the rear axle.

LIMITATIONS

The following General Motors truck models are not recommended for slide-in camper applications:

- El Camino/Cavaliers—All models
- Any truck in model line with a cargo weight rating of less than 1000 lbs.

A statement is imprinted on the Truck Camper Loading information label which states that the vehicle should not be used to carry a slide-in camper.

- S-T-10 15 Pickup with 1000-lb. payload
- S-T-10 15 Pickup with 113" WB
- S-T-10 15 Extended Cab Pickup

Note: C10 1500 Pickups should not be used for larger, heavier-type slide-in campers.

TRUCK - CAMPER LOADING

C/K PICKUPS

INSTRUCTIONS

VEHICLE SELECTION AND WEIGHT ANALYSIS

1. From the model selector in the C/K Pickup section of the General Motors Light-Duty Truck Facts Data Book, select the pickup truck model you desire. Refer to the GVWR selector for the selected model. Select the GVWR you require and note the minimum tire size and chassis equipment required for that GVWR. To approximate the GVWR you require, add your loaded camper weight to the vehicle model weight shown on the appropriate model weight and dimension page of the Facts Data Book. Record this information on the C/K Pickup computation sheet, page 7.
2. Record the front and rear model weights of your selected vehicle.
3. In the appropriate sections of the computation sheet, record the chassis equipment you desire: tires, springs, stabilizer bars. Keep in mind that you must select suspension equipment having load capacities equal to or greater than those of the minimum equipment required for your selected GVW rating. The capacities of standard springs are shown on the standard specification pages. Record the front and rear weight of each piece of equipment and the load capacity of the springs and tires in the appropriate columns.
4. List all other factory-installed options you desire with their front and rear weights on the C/K Pickup computation sheet.
5. Total the front and rear weights of vehicle model and options to arrive at the total front and rear weight of the vehicle.
6. Subtract the total front and rear weights of the vehicle from the GVWR to arrive at the cargo weight rating of your truck.
7. To determine the front gross axle weight rating (GAWR) of your vehicle, select the lowest of the front tire or front spring load capacities and multiply by 2. This will be the front GAWR.
8. The rear GAWR is computed in the same manner. Select the lowest of the rear tire or rear spring load capacities and multiply by 2.
9. For weight, calculate the center of gravity location using front and rear GAWRs, cargo weight rating and front and rear weight of truck as determined above. Record this information on the C/K Pickup computation sheet.
10. Many dealer-installed or factory-equipped accessories reduce the cargo carrying capacity by the weight of the equipment installed. Consult the dealer's literature for the weight of the front and rear wheels, stabilizer bars, etc. Determine the GAWR when the vehicle is at its initial cargo weight rating and not have to add the 50# for all models.

WORKSHEET – CARGO WEIGHT RATING

2 Model Weights:

REAR.

Load Capacity*

[illegible]

(continued)

*** * ***

[illegible]

1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12. 13. 14. 15. 16. 17. 18. 19. 20. 21. 22. 23. 24. 25. 26. 27. 28. 29. 30. 31. 32. 33. 34. 35. 36. 37. 38. 39. 40. 41. 42. 43. 44. 45. 46. 47. 48. 49. 50. 51. 52. 53. 54. 55. 56. 57. 58. 59. 60. 61. 62. 63. 64. 65. 66. 67. 68. 69. 70. 71. 72. 73. 74. 75. 76. 77. 78. 79. 80. 81. 82. 83. 84. 85. 86. 87. 88. 89. 90. 91. 92. 93. 94. 95. 96. 97. 98. 99. 100. 101. 102. 103. 104. 105. 106. 107. 108. 109. 110. 111. 112. 113. 114. 115. 116. 117. 118. 119. 120. 121. 122. 123. 124. 125. 126. 127. 128. 129. 130. 131. 132. 133. 134. 135. 136. 137. 138. 139. 140. 141. 142. 143. 144. 145. 146. 147. 148. 149. 150. 151. 152. 153. 154. 155. 156. 157. 158. 159. 160. 161. 162. 163. 164. 165. 166. 167. 168. 169. 170. 171. 172. 173. 174. 175. 176. 177. 178. 179. 180. 181. 182. 183. 184. 185. 186. 187. 188. 189. 190. 191. 192. 193. 194. 195. 196. 197. 198. 199. 200. 201. 202. 203. 204. 205. 206. 207. 208. 209. 210. 211. 212. 213. 214. 215. 216. 217. 218. 219. 220. 221. 222. 223. 224. 225. 226. 227. 228. 229. 230. 231. 232. 233. 234. 235. 236. 237. 238. 239. 240. 241. 242. 243. 244. 245. 246. 247. 248. 249. 250. 251. 252. 253. 254. 255. 256. 257. 258. 259. 260. 261. 262. 263. 264. 265. 266. 267. 268. 269. 270. 271. 272. 273. 274. 275. 276. 277. 278. 279. 280. 281. 282. 283. 284. 285. 286. 287. 288. 289. 290. 291. 292. 293. 294. 295. 296. 297. 298. 299. 300. 301. 302. 303. 304. 305. 306. 307. 308. 309. 310. 311. 312. 313. 314. 315. 316. 317. 318. 319. 320. 321. 322. 323. 324. 325. 326. 327. 328. 329. 330. 331. 332. 333. 334. 335. 336. 337. 338. 339. 340. 341. 342. 343. 344. 345. 346. 347. 348. 349. 350. 351. 352. 353. 354. 355. 356. 357. 358. 359. 360. 361. 362. 363. 364. 365. 366. 367. 368. 369. 370. 371. 372. 373. 374. 375. 376. 377. 378. 379. 380. 381. 382. 383. 384. 385. 386. 387. 388. 389. 390. 391. 392. 393. 394. 395. 396. 397. 398. 399. 400. 401. 402. 403. 404. 405. 406. 407. 408. 409. 410. 411. 412. 413. 414. 415. 416. 417. 418. 419. 420. 421. 422. 423. 424. 425. 426. 427. 428. 429. 430. 431. 432. 433. 434. 435. 436. 437. 438. 439. 440. 441. 442. 443. 444. 445. 446. 447. 448. 449. 450. 451. 452. 453. 454. 455. 456. 457. 458. 459. 460. 461. 462. 463. 464. 465. 466. 467. 468. 469. 470. 471. 472. 473. 474. 475. 476. 477. 478. 479. 480. 481. 482. 483. 484. 485. 486. 487. 488. 489. 490. 491. 492. 493. 494. 495. 496. 497. 498. 499. 500. 501. 502. 503. 504. 505. 506. 507. 508. 509. 510. 511. 512. 513. 514. 515. 516. 517. 518. 519. 520. 521. 522. 523. 524. 525. 526. 527. 528. 529. 530. 531. 532. 533. 534. 535. 536. 537. 538. 539. 540. 541. 542. 543. 544. 545. 546. 547. 548. 549. 550. 551. 552. 553. 554. 555. 556. 557. 558. 559. 560. 561. 562. 563. 564. 565. 566. 567. 568. 569. 570. 571. 572. 573. 574. 575. 576. 577. 578. 579. 580. 581. 582. 583. 584. 585. 586. 587. 588. 589. 590. 591. 592. 593. 594. 595. 596. 597. 598. 599. 600. 601. 602. 603. 604. 605. 606. 607. 608. 609. 610. 611. 612. 613. 614. 615. 616. 617. 618. 619. 620. 621. 622. 623. 624. 625. 626. 627. 628. 629. 630. 631. 632. 633. 634. 635. 636. 637. 638. 639. 640. 641. 642. 643. 644. 645. 646. 647. 648. 649. 650. 651. 652. 653. 654. 655. 656. 657. 658. 659. 660. 661. 662. 663. 664. 665. 666. 667. 668. 669. 670. 671. 672. 673. 674. 675. 676. 677. 678. 679. 680. 681. 682. 683. 684. 685. 686. 687. 688. 689. 690. 691. 692. 693. 694. 695. 696. 697. 698. 699. 700. 701. 702. 703. 704. 705. 706. 707. 708. 709. 710. 711. 712. 713. 714. 715. 716. 717. 718. 719. 720. 721. 722. 723. 724. 725. 726. 727. 728. 729. 730. 731. 732. 733. 734. 735. 736. 737. 738. 739. 740. 741. 742. 743. 744. 745. 746. 747. 748. 749. 750. 751. 752. 753. 754. 755. 756. 757. 758. 759. 760. 761. 762. 763. 764. 765. 766. 767. 768. 769. 770. 771. 772. 773. 774. 775. 776. 777. 778. 779. 780. 781. 782. 783. 784. 785. 786. 787. 788. 789. 790. 791. 792. 793. 794. 795. 796. 797. 798. 799. 800. 801. 802. 803. 804. 805. 806. 807. 808. 809. 810. 811. 812. 813. 814. 815. 816. 817. 818. 819. 820. 821. 822. 823. 824. 825. 826. 827. 828. 829. 830. 831. 832. 833. 834. 835. 836. 837. 838. 839. 840.

5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1041 1042

-50

Record on page 3.

LOAD CAPACITY

**AXLE
CAPACITY**

**GROSS AXLE WEIGHT
RATING (LOWEST VALUE
OF AXLE CAPACITIES)**

1. Summary

2 Tires

B Rear:

Springs

2 Tires

Page 7

TRUCK – CAMPER LOADING

S/T-10/15 MODELS

INSTRUCTIONS

VEHICLE SELECTION AND WEIGHT ANALYSIS

1. You must order as a minimum the RPO C3A option (1500 lbs. Payload Package) on a S/T10803 (117.9" WB) model if you intend on using a slide-in camper on your S/T-10/15 Pickup Truck.
2. From the S Pickup section of the General Motors Light-Duty Truck Facts Data Book, record the front and rear model weights of your vehicle on the S/T-10/15 computation sheet, page 9.
3. List all the factory-installed options including tires you desire with their front and rear weights on the S/T-10/15 Pickup computation sheet.
4. Total the front and rear weights of vehicle model and options to arrive at the total front and rear weight of the vehicle.*
5. Add the cargo weight rating (1050 lbs.)[†] to the total front and rear weights of the vehicle to arrive at the vehicle GVWR.
6. Determine the Gross Axle Weight Ratings (GAWRs) of your selected vehicle as follows:
 - a) Front GAWR is shown on computation sheet.
 - b) Rear GAWR is computed by multiplying the load capacity of the tire selected by 2 and comparing to the value specified for rear axle rating. Select the lowest value of either the rear tire or rear axle capacity.
7. Proceed to calculate the center of gravity location using front and rear GAWRs, Cargo Weight Rating, and front and rear weight of truck as determined above. Record this information on the S/T-10/15 Pickup computation sheet.

*If your vehicle is available, drive to a scale and weigh on the front and on the rear wheels separately to determine the axle loads. You will then be able to use your actual cargo weight and not have to add the 1050 lbs. for the S/T truck.

[†]For RPO C3A Bucket Seats, Cargo Weight Package is 1000 lbs.

[‡]For the duration of any dealer-installed or other accessories in, on, or attached to the vehicle, the load capacity or the weight of the equipment installed.

TRUCK - JAMPER LOADING

5/7-10/15 MODELS

WORKSHEET - VEHICLE GVWR AND GROSS AXLE WEIGHT RATINGS

Model S 710803 with CBA

| | | |
|----------------------------------|-------------|------------|
| Model Weights: | FRONT _____ | REAR _____ |
| Other factory-installed options: | | |
| _____ | _____ | _____ |
| _____ | _____ | _____ |
| _____ | _____ | _____ |
| _____ | _____ | _____ |
| _____ | _____ | _____ |
| _____ | _____ | _____ |
| _____ | _____ | _____ |
| TOTALS | _____ | _____ |

| | | |
|--|-------|-------|
| Front and Rear Weight: | _____ | _____ |
| 1a Vehicle subtotal weight (add front and rear weight) | _____ | _____ |
| 1b Add 50 lbs. for all models | _____ | -50 |
| 1c Adjusted total vehicle weight: | _____ | _____ |

Vehicle GVWR:

| | |
|----------------------------------|-------|
| 1a Adjusted total vehicle weight | _____ |
| 1b Cargo Weight Rating | 1050* |
| 1c Vehicle GVWR | _____ |

Record on page 3.

Gross Axle Weight Rating:

| | LOAD
CAPACITY | AXLE
CAPACITY | GROSS AXLE WEIGHT
RATING (LOWEST VALUE
OF AXLE CAPACITIES) |
|---------|------------------|------------------|--|
| 1 Front | _____ | _____ | _____ |
| 2 Rear | _____ | _____ | _____ |
| 3 Axle | _____ | _____ | _____ |
| 4 Tires | _____ | 1/2 = _____ | _____ |

* 1050 LBS. IS THE MAXIMUM ALLOWABLE GROSS AXLE WEIGHT FOR EACH TIRE.
* 1050 LBS. IS THE MAXIMUM ALLOWABLE GROSS AXLE WEIGHT FOR EACH TIRE.
* 1050 LBS. IS THE MAXIMUM ALLOWABLE GROSS AXLE WEIGHT FOR EACH TIRE.

TRUCK - CAMPER LOADING

MODEL CODES AND DIMENSIONS

| SERIES | MODEL NUMBER | PICKUP BOX LENGTH | PICKUP STYLE | WB | "C" |
|---|--------------|-------------------|---------------------------|-------|--------|
| 2-WHEEL-DRIVE REGULAR CAB MODELS | | | | | |
| S/T-15 | S10803 | 7' | Fleetside/Wideside (E63) | 17'3" | 42'40" |
| S/T-1500 | C10703 | 6' | Fleetside/Wideside (E63) | 17'3" | 39'00" |
| | | | Stepside/Fenderside (E62) | | 38'00" |
| C20-2500 | C10903 | 9' | Fleetside/Wideside (E63) | 17'3" | 41'00" |
| | | | Stepside/Fenderside (E62) | | 40'00" |
| C30-3500 | C30903 | 12' | Fleetside/Wideside (E63) | 17'3" | 44'00" |
| | | | Stepside/Fenderside (E62) | | 43'00" |

4-WHEEL-DRIVE REGULAR CAB MODELS

| | | | | | |
|----------|--------|-----|---------------------------|-------|--------|
| S/T-15 | K10803 | 7' | Fleetside/Wideside (E63) | 17'3" | 42'40" |
| K10-1500 | K10703 | 6' | Fleetside/Wideside (E63) | 17'3" | 39'00" |
| | | | Stepside/Fenderside (E62) | | 38'00" |
| K20-2500 | K10903 | 9' | Fleetside/Wideside (E63) | 17'3" | 41'00" |
| | | | Stepside/Fenderside (E62) | | 40'00" |
| K30-3500 | K30903 | 12' | Fleetside/Wideside (E63) | 17'3" | 44'00" |
| | | | Stepside/Fenderside (E62) | | 43'00" |

BONUS CAB MODELS



| | | | | | |
|----------|--------|-----|--------------------------------|-------|--------|
| C20-2500 | C20943 | 9' | Fleetside/Wideside (E63 & YG4) | 17'3" | 41'00" |
| C30-3500 | C30943 | 12' | Fleetside/Wideside (E63 & YG4) | 17'3" | 44'00" |
| K30-3500 | K30943 | 12' | Fleetside/Wideside (E63 & YG4) | 17'3" | 44'00" |

CREW CAB MODELS

| | | | | | |
|----------|--------|-----|--------------------------------|-------|--------|
| C20-2500 | C20943 | 9' | Fleetside/Wideside (E63 & AS3) | 17'3" | 41'00" |
| C30-3500 | C30943 | 12' | Fleetside/Wideside (E63 & AS3) | 17'3" | 44'00" |
| K30-3500 | K30943 | 12' | Fleetside/Wideside (E63 & AS3) | 17'3" | 44'00" |



FLEETSIDE/WIDESIDE

STEPSIDE/FENDERSIDE

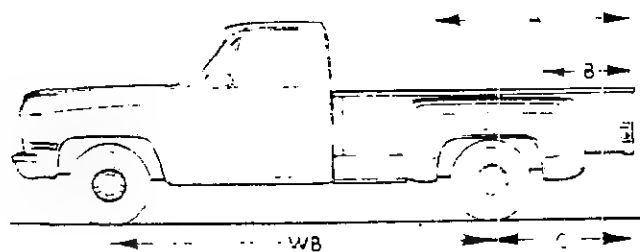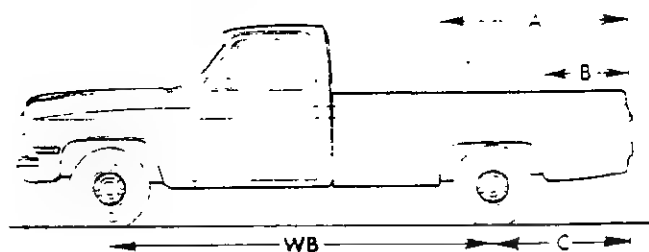

BONUS CAB AND CREW CAB

S/T-10/15 PICKUP

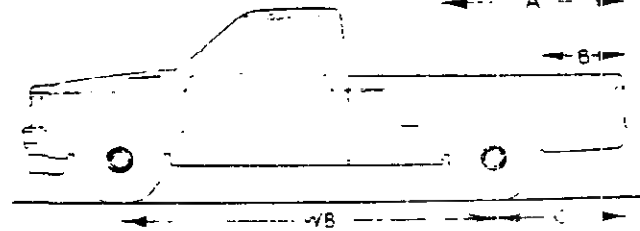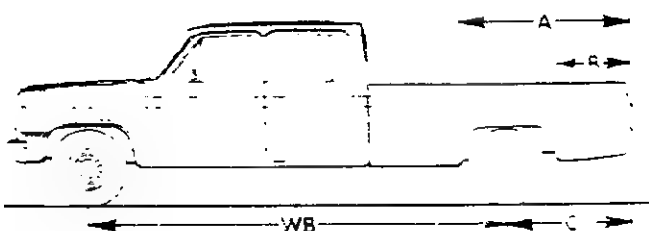

TRUCK - CAMPER LOADING

CALCULATIONS TO DETERMINE FORWARD (A) AND REARWARD (B) LOCATION OF CENTER OF GRAVITY FOR CARGO WEIGHT RATING

Calculations for Dimension A

$$A = \frac{\text{Front GAWR} - 1.05 \times \text{Front Weight of Truck}}{\text{Cargo Weight Rating}} \times \text{W.B.} + C$$

Enter Front GAWR _____

Subtract Front Weight of Truck x 1.05 _____

Answer _____

Divide Answer by Cargo Weight _____

Answer _____

Multiply Answer by Wheelbase _____

(See Chart on Page 10)

Answer _____

Add C Dimension to Answer _____

See Chart on Page 10

Dimension A = _____

Note: If "A" is greater than pickup box length, use box length for "A" dimension.

Calculations for Dimension B

$$B = 1 - \frac{\text{Rear GAWR} - 1.1 \times \text{Rear Weight of Truck}}{\text{Cargo Weight Rating}} \times \text{W.B.} - C$$

Enter Rear GAWR _____

Subtract Rear Weight of Truck x 1.1 _____

Answer _____

Divide Answer by Cargo Weight _____

Answer _____

Subtract Answer from 1.00 _____

Multiply Answer by Wheelbase _____


Answer _____

Add C Dimension to Answer _____

Dimension B = _____

Note: If "B" dimension is negative, use 0 (zero) for "B" dimension

Record dimension A and B on page 3.

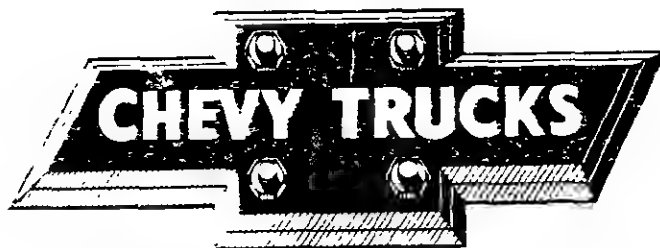

CHEVROLET MOTOR DIVISION
GENERAL MOTORS CORPORATION
WARREN MICHIGAN 48090



GMC TRUCK & COACH OPERATIONS
GENERAL MOTORS CORPORATION
PONTIAC MICHIGAN 48058




AVANTI

1987 Chevrolet



C/K PICKUP


PICKUP MODEL SELECTOR

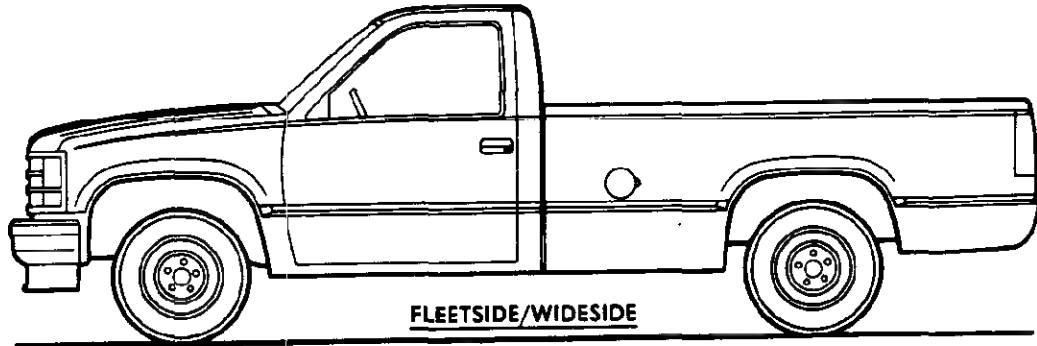

FLEETSIDE/WIDESIDE

REGULAR CAB

| SERIES | MODEL NUMBER | | BODY ORDERING CODE | |
|--------------------|--------------|--------|--------------------|--------------------|
| | | | GASOLINE MODELS | DIESEL MODELS |
| | 6½' BOX | 8' BOX | FLEETSIDE/WIDESIDE | FLEETSIDE/WIDESIDE |
| C1500 | C10703 | C10903 | E63 | — |
| C2500 | — | C20903 | E63 | E63/B3J |
| C3500 | — | C30903 | E63 | E63/B3J |
| K1500 (4X4) | K10703 | K10903 | E63 | — |
| K2500 (4X4) | — | K20903 | E63 | E63/B3J |
| K3500 (4X4) | — | K30903 | E63 | E63/B3J |

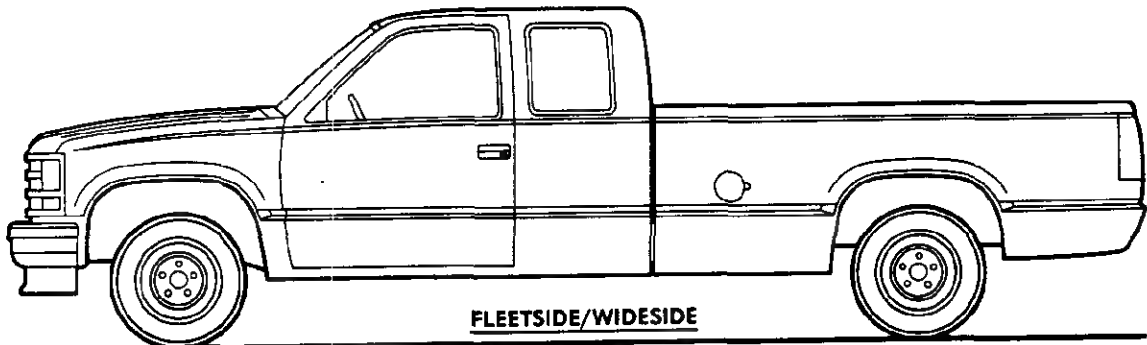

FLEETSIDE/WIDESIDE

EXTENDED CAB

| SERIES | MODEL NUMBER | BODY ORDERING CODE
8' FLEETSIDE/WIDESIDE BOX | |
|--------------|--------------|---|---------------|
| | | GASOLINE MODELS | DIESEL MODELS |
| | | | |
| C1500 | C10953 | E63 | — |
| C2500 | C20953 | E63 | E63/B3J |
| C3500 | C30953 | E63 | E63/B3J |
| K1500 | K10953 | E63 | — |
| K2500 | K20953 | E63 | E63/B3J |
| K3500 | K30953 | E63 | E63/B3J |

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

GASOLINE**C/K PICKUP—2-Wheel Drive**

C1500 REGULAR CABS
C1500 EXTENDED CABS

STANDARD SPECIFICATIONS

| Series | C1500 Regular Cab | C1500 Extended Cab |
|-------------------------------------|--|---------------------------|
| Engine | | |
| Base Equip. | 4.3 Liter, 262 EFI V6 | |
| Clutch | 11"; 124 sq. in. | |
| Air Filter | Oiled-paper Element | |
| Oil Filter | Throwaway Type | |
| Exhaust System | Single; Aluminized | |
| Emission Control Systems | Meet Government Requirements | |
| Suspension, Front | Independent; Coil Springs | |
| Capacity | 2950 lb. | 3600 lb. |
| Springs @ Ground | 1500 lb. ea. | 1800 lb. ea. |
| Shock Absorbers | 25mm dia. | |
| Suspension, Rear | Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs | |
| Axle Capacity | 3750 lb. | |
| Axle Ratio | 2.73 | |
| Springs @ Ground | 1875 lb. ea. | |
| Shock Absorbers | 25mm dia. | |
| Brakes | Hydraulic; Self-adjusting | |
| Front | Disc; 11.86" Rotor | |
| Rear | Drum; 11" x 2" | |
| Booster | Single Diaphragm | |
| Parking | Cable to Rear Wheels | |
| Electrical | 12 Volt; Negative Ground | |
| Battery—Freedom Type | 525 CCA♦ @ 0°F. | |
| —Reserve Capacity | 90 min. @ 80°F. | |
| Delcotron Generator | 66 amp. | |
| Frame | Carbon Steel; 36,39,000 psi | |
| Section Modulus | 2.70 | 3.42 |
| Fuel Tank (nominal capacity) | 25 gal. | |
| Steering Gear Type | Integral Power | |
| Transmission | Fully Synchronized 4-Speed Manual | |
| Shift Location | Floor | |
| Tires | (5) P205/75R15 | (5) P235/75R15 |
| Wheels | (5) Disc | |
| Size | 15" x 6" | |

♦CCA-Cold Cranking Amps

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

NOTES

GASOLINE**C/K PICKUP—2-Wheel Drive****C2500 REGULAR CABS****C2500 EXTENDED CABS****STANDARD SPECIFICATIONS**

| Series | C2500 Regular Cab | C2500 Extended Cab |
|-------------------------------------|--|---------------------------|
| Engine | 4.3 Liter, 262 EFI V6 | |
| Base Equip. | 11"; 124 sq. in. | |
| Clutch | Oiled-paper Element | |
| Air Filter | Throwaway Type | |
| Oil Filter | Single; Aluminized | |
| Exhaust System | Meet Government Requirements | |
| Emission Control Systems | | |
| Suspension, Front | Independent; Coil Springs | |
| Capacity | 3150 lb. | 3600 lb. |
| Springs @ Ground | 1800 lb. ea. | |
| Shock Absorbers | 25mm dia. | |
| Suspension, Rear | Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs | |
| Axle Capacity | 4800 lb. | |
| Axle Ratio | 3.42 | |
| Springs @ Ground | 2400 lb. ea. | |
| Shock Absorbers | 25mm dia. | |
| Brakes | Hydraulic, Self-adjusting | |
| Front | Disc; 11.57" Rotor | |
| Rear | Drum; 11.15" x 2.75" | |
| Booster | Dual Diaphragm | |
| Parking | Cable to Rear Wheels | |
| Electrical | 12 Volt; Negative Ground | |
| Battery—Freedom Type | 525 CCA♦ @ 0°F | |
| —Reserve Capacity | 90 min. @ 80°F | |
| Delcotron Generator | 66 amp. | |
| Frame | Carbon Steel; 36,-39,000 psi | |
| Section Modulus | 2.70 | 3.42 |
| Fuel Tank (nominal capacity) | 25 gal. | |
| Steering Gear Type | Integral Power | |
| Transmission | 5-Speed Manual w/Overdrive | |
| Shift Location | Floor | |
| Tires | (4) LT225/75R16D (8PR) | |
| Wheels | (4) Disc | |
| Size | 16" x 6.5" | |

♦CCA-Cold Cranking Amps

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

C/K PICKUP—2-Wheel Drive

DIESEL

**C2500 REGULAR CABS
C2500 EXTENDED CABS**

STANDARD SPECIFICATIONS

| Series | C2500 Regular Cab | C2500 Extended Cab |
|-------------------------------------|--|--------------------|
| Engine | 6.2 Liter, 379 Cu. In. V8 Diesel | |
| Base Equip. | 12"; 150 sq. in. | |
| Clutch | Poly-wrapped, Oiled-paper Element | |
| Air Filter | Throwaway Type | |
| Oil Filter | Standard | |
| Oil Cooler | Dual; Aluminized | |
| Exhaust System | Meet Government Requirements | |
| Emission Control Systems | | |
| Suspension, Front | Independent; Coil Springs | |
| Capacity | 3400 lb. | 3600 lb. |
| Springs @ Ground | 1800 lb. ea. | |
| Shock Absorbers | 25mm dia. | |
| Suspension, Rear | Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs | |
| Axle Capacity | 4800 lb. | |
| Axle Ratio | 3.42 | |
| Springs, Main @ Ground | 2400 lb. ea. | |
| Shock Absorbers | 25mm dia. | |
| Brakes | Hydraulic, Self-adjusting | |
| Front | Disc; 11.57" Rotor | |
| Rear | Drum; 11.5" x 2.75" | |
| Booster | Hydraulic Power | |
| Parking | Cable to Rear Wheels | |
| Electrical | 12 Volt; Negative Ground | |
| Battery—Freedom Type | Two: 550 CCA♦ ea. @ 0°F. | |
| — Reserve Capacity | 115 min. ea. @ 80°F. | |
| Delcotron Generator | 66 amp. | |
| Engine Block Heater | 600 watts, 120 volts | |
| Frame | Carbon Steel; 36,-39,000 psi | |
| Section Modulus | 2.70 | 3.42 |
| Fuel Tank (nominal capacity) | 25 gal. | |
| Steering Gear Type | Integral Power | |
| Transmission | 4-Speed Manual (SM 46S) | |
| Shift Location | Floor | |
| Tires | (4) LT 225/75R16D (8PR) | |
| Wheels | (4) Disc | |
| Size | 16" x 6.5" | |

♦CCA-Cold Cranking Amps

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

GASOLINE**C/K PICKUP—2-Wheel Drive****C3500 REGULAR CABS****C3500 EXTENDED CABS****STANDARD SPECIFICATIONS**

| Series | C3500 Regular Cab | C3500 Extended Cab |
|--|--|---------------------------|
| Engine
Base Equip.
Clutch
Air Filter
Oil Filter
Exhaust System
Emission Control Systems | 5.7 Liter, 350 EFI V8
12"; 150 sq. in.
Oiled-paper Element
Throwaway Type
Single; Aluminized
Meet Government Requirements | |
| Suspension, Front
Capacity
Springs @ Ground
Shock Absorbers | Independent; Coil Springs
3800 lb.
1900 lb. ea.
32mm | |
| Suspension, Rear
Axle Capacity
Axle Ratio
Springs @ Ground
Shock Absorbers | Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs
6000 lb.
3.42
3000 lb. ea.
32mm dia. | |
| Brakes
Front
Rear
Booster
Parking | Hydraulic, Self-adjusting
Disc; 12.5" rotor
Drum; 13" x .5"
Hydraulic Power
Cable to Rear Wheels | |
| Electrical
Battery—Freedom Type
—Reserve Capacity
Delcotron Generator | 12 Volt; Negative Ground
525 CCA♦ ea. @ 0°F.
90 min. @ 80°F.
66 amp. | |
| Frame
Section Modulus | Carbon Steel; 36,-39,000 psi
5.386.21 | |
| Fuel Tank
(Nominal Capacity) | 25 gal. | |
| Steering Gear Type | Integral Power | |
| Transmission
Shift Location | 4-Speed Manual (SM 465)
Floor | |
| Tires | (4) LT 245/75R16E (10PR) | |
| Wheels
Size | (4) Disc
16" x 6.5" | |

♦CCA-Cold Cranking Amps

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

C/K PICKUP—2-Wheel Drive

DIESEL

**C3500 REGULAR CABS
C3500 EXTENDED CABS**

STANDARD SPECIFICATIONS

| Series | C3500 Regular Cab | C3500 Extended Cab |
|---|--|--------------------|
| Engine
Base Equip.
Clutch
Air Filter
Oil Filter
Oil Cooler
Exhaust System
Emission Control Systems | 6.2 Liter, 379 Cu. In. V8 Diesel
12"; 150 sq. in.
Poly-wrapped, Oiled-paper Element
Throwing type
Standard
Dual; Aluminized
Meet Government Requirements | |
| Suspension, Front
Capacity
Springs @ Ground
Shock Absorbers | Independent; Coil Springs
3800 lb.
1900 lb. ea.
32mm | |
| Suspension, Rear
Axle Capacity
Axle Ratio
Springs @ Ground
Shock Absorbers | Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs
6000 lb.
3.73
3000 lb. ea.
32mm dia. | |
| Brakes
Front
Rear
Booster
Parking | Hydraulic, Self-adjusting
Disc; 12.5" rotor
Drum; 13" x 3.5"
Hydraulic Power
Cable to Rear Wheels | |
| Electrical
Battery—Freedom Type
—Reserve Capacity
Delcotron Generator
Engine Block Heater | 12 Volt; Negative Ground
Two; 540 CCA♦ ea. @ 0°F.
115 min. @ 80°F.
66 amp.
600 watts, 120 volts | |
| Frame
Section Modulus | Carbon Steel; 36,39,000 psi
5.38 6.21 | |
| Fuel Tank
(Nominal Capacity) | 25 gal. | |
| Steering Gear Type | Integral Power | |
| Transmission
Shift Location | 4-Speed Manual (SM 465)
Floor | |
| Tires | (4) LT245/75R16E (10PR) | |
| Wheels
Size | (4) Disc
16" x 6.5" | |

♦CCA-Cold Cranking Amps

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

GASOLINE**C/K PICKUP—4-Wheel Drive****K1500 REGULAR CABS****K1500 EXTENDED CABS****STANDARD SPECIFICATIONS**

| Series | K1500 Regular Cab | K1500 Extended Cab |
|---|--|------------------------|
| Engine
Base Equip.
Clutch
Air Filter
Oil Filter
Exhaust System
Emission Control Systems | 4.3 Liter, 262 EFI V6
11", 124 sq. in.
Oiled-paper Element
Throwaway Type
Single; Aluminized
Meet Government Requirements | |
| Suspension, Front
Capacity—117.5" WB
—131.5" WB
—155.5" WB
Axle Ratio
Springs @ Ground
Shock Absorbers | Independent; Torsion Bars
3350 lb. —
3450 lb. —
— 3925 lb.
3.42
1930 lb. ea.
25mm dia. | |
| Suspension, Rear
Axle Capacity
Axle Ratio
Springs @ Ground
Shock Absorbers | Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs
3750 lb.
3.42
1875 lb. ea.
25mm dia. | |
| Brakes
Front
Rear
Booster
Parking | Hydraulic; Self-adjusting
Disc; 11.86" Rotor
Drum; 11" x 2"
—
Cable to Rear Wheels | |
| Electrical
Battery—Freedom Type
—Reserve Capacity
Delcotron Generator | 12 Volt; Negative Ground
525 CCA♦ @ 0°F.
90 min. @ 80°F.
66 amp. | |
| Frame
Section Modulus | Carbon Steel; 36,-39,000 psi
3.46 4.30 | |
| Fuel Tank (nominal capacity) | 25 gal. | |
| Steering Gear Type | Integral Power | |
| Transmission
Shift Location | 5-Speed Manual w/Overdrive
Floor | |
| Tires | (5) LT225/75R16C (6PR) | (5) LT245/75R16C (6PF) |
| Wheels
Size | (5) Disc
16" x 6" | |

♦CCA-Cold Cranking Amps

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

NOTES

GASOLINE**C/K PICKUP—4-Wheel Drive****K2500 REGULAR CABS
K2500 EXTENDED CABS****STANDARD SPECIFICATIONS**

| Series | K2500 Regular Cab | K2500 Extended Cab |
|-------------------------------------|--|---------------------------|
| Engine | 4.3 Liter, 262 EFI V6 | |
| Base Equip. | 11"; 124 sq. in. | |
| Clutch | Oiled-paper Element | |
| Air Filter | Throwaway Type | |
| Oil Filter | Single, Aluminized | |
| Exhaust System | Meet Government Requirements | |
| Emission Control Systems | | |
| Suspension, Front | Independent; Torsion Bars | |
| Capacity | 3925 lb. | |
| Axle Ratio | 3.42 | |
| Springs @ Ground | 2125 lb. ea. | |
| Shock Absorbers | 25mm dia. | |
| Suspension, Rear | Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs | |
| Axle Capacity | 4800 lb. | |
| Axle Ratio | 3.42 | |
| Springs @ Ground | 2400 lb. ea. | |
| Shock Absorbers | 25mm dia. | |
| Brakes | Hydraulic, Self-adjusting | |
| Front | Disc; 11.57" Rotor | |
| Rear | Drum; 11.15" x 2.75" | |
| Booster | Dual Diaphragm | |
| Parking | Cable to Rear Wheels | |
| Electrical | 12 Volt; Negative Ground | |
| Battery—Freedom Type | 525 CCA♦ @ 0°F | |
| —Reserve Capacity | 90 min. @ 80°F | |
| Delcotron Generator | 66 amp. | |
| Frame | Carbon Steel; 36,-39,000 psi | |
| Section Modulus | 3.46 | 4.30 |
| Fuel Tank (nominal capacity) | 25 gal. | |
| Steering Gear Type | Integral Power | |
| Transmission | 5-Speed Manual w/Overdrive | |
| Shift Location | Floor | |
| Tires | (4) LT225/75R16D (8PR) | (4) LT 245/75R16C (6PR) |
| Wheels | (4) Disc | |
| Size | 16" x 6.5" | |

♦CCA-Cold Cranking Amps

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

C/K PICKUP—4-Wheel Drive

DIESEL

**K2500 REGULAR CABS
K2500 EXTENDED CABS**

STANDARD SPECIFICATIONS

| Series | K2500 Regular Cab | K2500 Extended Cab |
|-------------------------------------|--|------------------------|
| Engine | 6.2 Liter, 379 Cu. In. V8 Diesel | |
| Base Equip. | 12"; 150 sq. in. | |
| Clutch | Poly-wrapped, Oiled-paper Element | |
| Air Filter | Throwaway Type | |
| Oil Filter | Standard | |
| Oil Cooler | Single, Aluminized | |
| Exhaust System | Meet Government Requirements | |
| Emission Control Systems | | |
| Suspension, Front | Independent; Torsion Bars | |
| Capacity | 3925 lb. | |
| Springs @ Ground | 2125 lb. ea. | |
| Shock Absorbers | 25mm dia. | |
| Suspension, Rear | Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs | |
| Axle Capacity | 4800 lb. | |
| Axle Ratio | 3.42 | |
| Springs, Main @ Ground | 2400 lb. ea. | |
| Shock Absorbers | 25mm dia. | |
| Brakes | Hydraulic, Self-adjusting | |
| Front | Disc; 11.57" Rotor | |
| Rear | Drum; 11.5" x 2.75" | |
| Booster | Hydraulic Power | |
| Parking | Cable to Rear Wheels | |
| Electrical | 12 Volt; Negative Ground | |
| Battery—Freedom Type | Two: 550 CCA♦ ea. @ 0°F. | |
| —Reserve Capacity | 115 min. ea. @ 80°F. | |
| Delcotron Generator | 66 amp. | |
| Engine Block Heater | 600 watts, 120 volts | |
| Frame | Carbon Steel; 36,39,000 psi | |
| Section Modulus | 3.46 | 4.30 |
| Fuel Tank (nominal capacity) | 25 gal. | |
| Steering Gear Type | Integral Power | |
| Transmission | 4-Speed Manual (SM 465) | |
| Shift Location | Floor | |
| Tires | (4) LT 225/75R16D (8PR) | (4) LT245/75R16C (6PR) |
| Wheels | (4) Disc | |
| Size | 16" x 6.5" | |

♦CCA-Cold Cranking Amps

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

GASOLINE**C/K PICKUP—4-Wheel Drive****K3500 REGULAR CABS****K3500 EXTENDED CABS****STANDARD SPECIFICATIONS**

| Series | K3500 Regular Cab | K3500 Extended Cab |
|---|--|---------------------------|
| Engine | 5.7 Liter, 350 EFI V8 | |
| Base Equip. | 12"; 150 sq. in. | |
| Clutch | Oiled-paper Element | |
| Air Filter | Throwaway Type | |
| Oil Filter | Single; Aluminized | |
| Exhaust System | Meet Government Requirements | |
| Emission Control Systems | | |
| Suspension, Front | Independent; Torsion Bars | |
| Capacity | 4250 lb. | |
| Axle Ratio | 3.42 | |
| Springs @ Ground | 2125 lb. ea. | |
| Shock Absorbers | 32mm | |
| Suspension, Rear | Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs | |
| Axle Capacity | 6000 lb | |
| Axle Ratio | 3.42 | |
| Springs @ Ground | 3000 lb. ea. | |
| Shock Absorbers | 32mm dia. | |
| Brakes | Hydraulic, Self-adjusting | |
| Front | Disc; 12.5" rotor | |
| Rear | Drum; 13" x .5" | |
| Booster | Hydraulic Power | |
| Parking | Cable to Rear Wheels | |
| Electrical | 12 Volt; Negative Ground | |
| Battery—Freedom Type | 525 CCA♦ ea. @ 0°F | |
| —Reserve Capacity | 90 min. @ 80°F | |
| Delcotron Generator | 66 amp. | |
| Frame | Carbon Steel; 36,-39,000 psi | |
| Section Modulus | 5.61 | 6.48 |
| Fuel Tank
(Nominal Capacity) | 25 gal. | |
| Steering Gear Type | Integral Power | |
| Transmission | 4-Speed Manual (SM 465) | |
| Shift Location | Floor | |
| Tires | (4) LT 245/75R16E (10PR) | |
| Wheels | (4) Disc | |
| Size | 16" x 6.5" | |

♦CCA-Cold Cranking Amps

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

C/K PICKUP—4-Wheel Drive

DIESEL

**K3500 REGULAR CABS
K3500 EXTENDED CABS**

STANDARD SPECIFICATIONS

| Series | K3500 Regular Cab | K3500 Extended Cab |
|---|---|--------------------|
| Engine
Base Equip.
Clutch
Air Filter
Oil Filter
Oil Cooler
Exhaust System
Emission Control Systems | 6.2 Liter, 379 Cu. In. V8 Diesel
12"; 150 sq. in.
Poly-wrapped, Oiled-paper Element
Throwaway type
Standard
Single; Aluminized
Meet Government Requirements | |
| Suspension, Front
Capacity
Axle Ratio
Springs @ Ground
Shock Absorbers | Independent; Torsion Bars
4250 lb.
3.73
2125 lb. ea.
32mm | |
| Suspension, Rear
Axle Capacity
Axle Ratio
Springs @ Ground
Shock Absorbers | Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs
6000 lb.
3.73
3000 lb. ea.
32mm dia. | |
| Brakes
Front
Rear
Booster
Parking | Hydraulic, Self-adjusting
Disc; 12.5" rotor
Drum; 13" x 3.5"
Hydraulic Power
Cable to Rear Wheels | |
| Electrical
Battery—Freedom Type
—Reserve Capacity
Delcotron Generator
Engine Block Heater | 12 Volt; Negative Ground
Two; 540 CCA♦ ea. @ 0°F.
115 min. @ 80°F.
66 amp.
600 watts, 120 volts | |
| Frame
Section Modulus | Carbon Steel; 36, -39,000 psi
5.61 6.48 | |
| Fuel Tank
(Nominal Capacity) | 25 gal. | |
| Steering Gear Type | Integral Power | |
| Transmission
Shift Location | 4-Speed Manual (SM 465)
Floor | |
| Tires | (4) LT245/75R16E (10PR) | |
| Wheels
Size | (4) Disc
16" x 6.5" | |

♦CCA-Cold Cranking Amps

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

C/K PICKUP


C2500-3500 SERIES FLEETSIDE/WIDESIDE PICKUP

DIESEL

Body Ordering Codes:


Regular Cab—E63

Extended Cab—E63

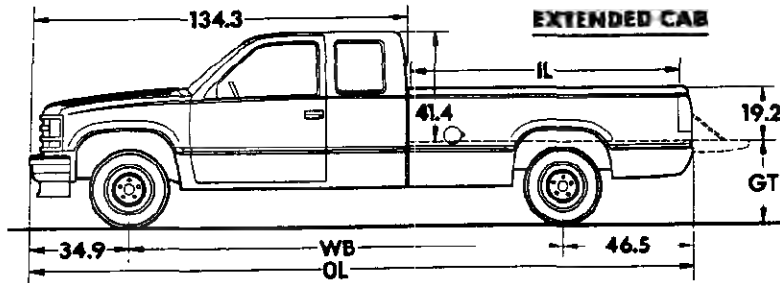

Sign Panel Area (side)
Regular Cab—17" x 48 1/2"
Extended Cab—17" x 77 1/4"

REGULAR CAB

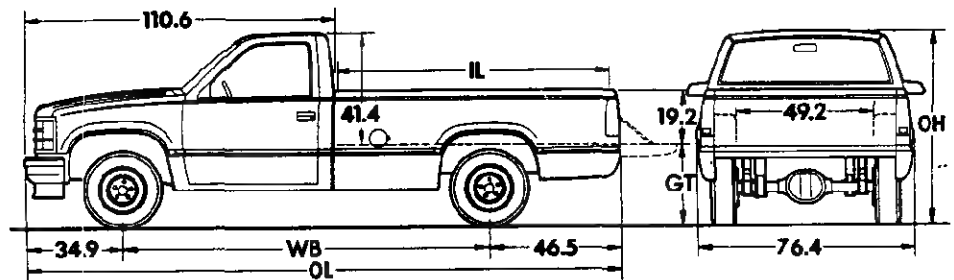

| Model | Wheelbase (in) | Body—Payload Weight Distribution* | |
|-------|----------------|-----------------------------------|--------|
| | | % Front | % Rear |
| C2-3 | 131.5 | 4 | 96 |
| C2-3 | 155.5 | 3 | 97 |

*Estimate based on water-level loading.

| Series | Ground Clearance (in)* | |
|---------|------------------------|------|
| | Front | Rear |
| C2 (03) | 7.8 | 7.8 |
| C2 (53) | 7.9 | 7.7 |
| C3 (03) | 8.4 | 8.1 |
| C3 (53) | 8.4 | 8.0 |

| Model | Engine
No. Cyl. | Dimensions (in)* | | | | | Curb Weight (lb) | | | Model Weight (lb)* | | |
|--------------|--------------------|------------------|------|-------|------|------|------------------|------|-------|--------------------|------|-------|
| | | WB | IL | OL | OH | GT | Front | Rear | Total | Front | Rear | Total |
| C2500 SERIES | | | | | | | | | | | | |
| C20903 | 8 | 131.5 | 97.6 | 212.9 | 73.0 | 31.6 | 2637 | 1703 | 4340 | 2883 | 1907 | 4790 |
| C20953 | 8 | 155.5 | 97.6 | 236.9 | 73.0 | 31.6 | 2807 | 1825 | 4632 | 3082 | 2000 | 5082 |
| C3500 SERIES | | | | | | | | | | | | |
| C30903 | 8 | 131.5 | 97.6 | 212.9 | 75.5 | 34.0 | 2820 | 1883 | 4703 | 3066 | 2087 | 5153 |
| C30953 | 8 | 155.5 | 97.6 | 236.9 | 75.5 | 34.0 | 2999 | 1974 | 4973 | 3274 | 2149 | 5423 |

*Dimensions with standard equipment, unloaded. *Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb.). Total Model Weight may vary as much as ±50 lbs. to allow for production build variation

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

C/K PICKUP


GASOLINE

K1500-3500 SERIES FLEETSIDE/WIDESIDE PICKUP


Body Ordering Codes:

Regular Cab—E63

Extended Cab—E63

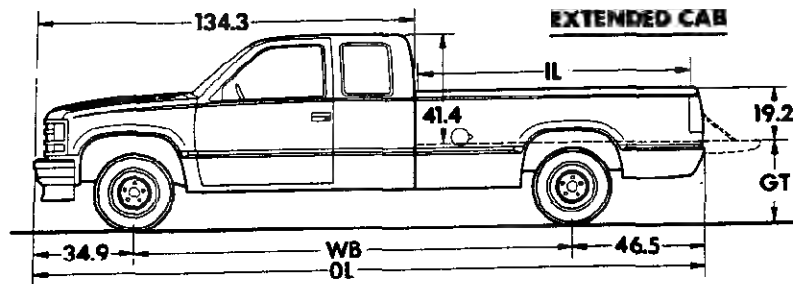

Sign Panel Area (side)
Regular Cab—17" x 48 1/2"
Extended Cab—17" x 77 1/4"

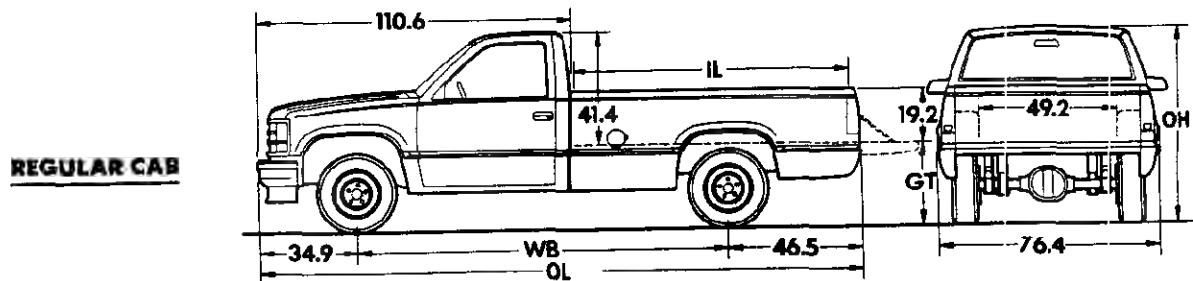

| Model | Wheelbase (in) | Body—Payload Weight Distribution* | |
|-------|----------------|-----------------------------------|--------|
| | | % Front | % Rear |
| K1 | 117.5 | 1 | 99 |
| K1-3 | 131.5 | 4 | 96 |
| K1-3 | 155.5 | 3 | 97 |

*Estimate based on water-level loading.

| Series | Ground Clearance (in)* | |
|---------|------------------------|------|
| | Front | Rear |
| K1 (03) | 8.6 | 9.0 |
| K1 (53) | 9.2 | 9.6 |
| K2 (03) | 8.7 | 7.7 |
| K2 (53) | 9.2 | 8.2 |
| K3 (03) | 7.8 | 8.1 |
| K3 (53) | 7.7 | 8.1 |

| Model | Engine No. Cyl. | Dimensions (in)* | | | | | Curb Weight (lb) | | | Model Weight (lb)* | | |
|-------|-----------------|------------------|----|----|----|----|------------------|------|-------|--------------------|------|-------|
| | | WB | IL | OL | OH | GT | Front | Rear | Total | Front | Rear | Total |

K1500 SERIES

| | | | | | | | | | | | | |
|---------------|---|-------|------|-------|------|------|------|------|------|------|------|------|
| K10703 | 6 | 117.5 | 78.4 | 194.1 | 73.8 | 32.3 | 2431 | 1666 | 4097 | 2651 | 1896 | 4547 |
| K10903 | 6 | 131.5 | 97.6 | 212.9 | 73.8 | 32.3 | 2486 | 1692 | 4178 | 2732 | 1896 | 4628 |
| K10953 | 6 | 155.5 | 97.6 | 236.9 | 73.9 | 32.3 | 2695 | 1826 | 4521 | 2970 | 2001 | 4971 |

K2500 SERIES

| | | | | | | | | | | | | |
|---------------|---|-------|------|-------|------|------|------|------|------|------|------|------|
| K20903 | 6 | 131.5 | 97.6 | 212.9 | 74.3 | 32.9 | 2524 | 1761 | 4285 | 2770 | 1965 | 4735 |
| K20953 | 6 | 155.5 | 97.6 | 236.9 | 74.5 | 32.9 | 2708 | 1872 | 4580 | 2983 | 2047 | 5030 |

K3500 SERIES

| | | | | | | | | | | | | |
|---------------|---|-------|------|-------|------|------|------|------|------|------|------|------|
| K30903 | 6 | 131.5 | 97.6 | 212.9 | 75.8 | 34.4 | 2755 | 1928 | 4683 | 3001 | 2132 | 5133 |
| K30953 | 6 | 155.5 | 97.6 | 236.9 | 76.0 | 34.4 | 2934 | 2026 | 4960 | 3209 | 2201 | 5410 |

★Dimensions with standard equipment, unloaded. *Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb). Total Model Weight may vary as much as ±50 lbs. to allow for production build variation.

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

C/K PICKUP


K2500-3500 SERIES FLEETSIDE/WIDESIDE PICKUP

DIESEL

Body Ordering Codes:


Regular Cab—E63

Extended Cab—E63

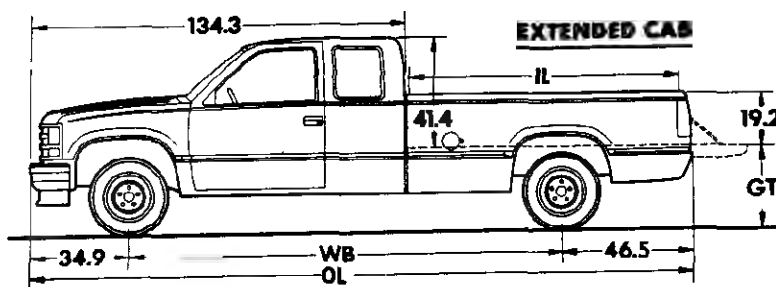

Sign Panel Area (side)
Regular Cab—17" x 48½"
Extended Cab—17" x 77½"

REGULAR CAB

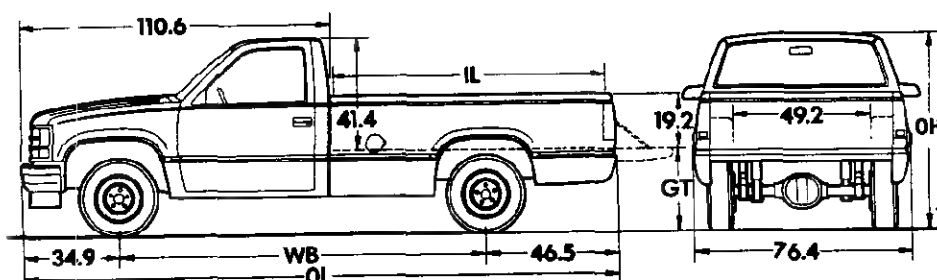

| Model | Wheelbase (in) | Body—Payload Weight Distribution* | |
|-------|----------------|-----------------------------------|--------|
| | | % Front | % Rear |
| K2-3 | 131.5 | 4 | 96 |
| K2-3 | 155.5 | 3 | 97 |

*Estimate based on water-level loading.

| Series | Ground Clearance (in)* | |
|---------|------------------------|------|
| | Front | Rear |
| K2 (03) | 8.7 | 7.7 |
| K2 (53) | 9.2 | 8.2 |
| K3 (03) | 7.8 | 8.1 |
| K3 (53) | 7.7 | 8.1 |

| Model | Engine No. Cyl. | Dimensions (in)* | | | | | Curb Weight (lb) | | | Model Weight (lb)* | | |
|-------|-----------------|------------------|----|----|----|----|------------------|------|-------|--------------------|------|-------|
| | | WB | IL | OL | OH | GT | Front | Rear | Total | Front | Rear | Total |

K2500 SERIES

| | | | | | | | | | | | | |
|---------------|---|-------|------|-------|------|------|------|------|------|------|------|------|
| K20903 | 8 | 131.5 | 97.6 | 212.9 | 74.3 | 32.9 | 2916 | 1776 | 4692 | 3162 | 1980 | 5142 |
| K20953 | 8 | 155.5 | 97.6 | 236.9 | 74.5 | 32.9 | 3100 | 1888 | 4988 | 3375 | 2063 | 5438 |

K3500 SERIES

| | | | | | | | | | | | | |
|---------------|---|-------|------|-------|------|------|------|------|------|------|------|------|
| K30903 | 8 | 131.5 | 97.6 | 212.9 | 75.8 | 34.4 | 3150 | 1943 | 5093 | 3396 | 2147 | 5543 |
| K30953 | 8 | 155.5 | 97.6 | 236.9 | 76.0 | 34.4 | 3330 | 2041 | 5371 | 3605 | 2216 | 5821 |

*Dimensions with standard equipment, unloaded. *Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb). Total Model Weight may vary as much as ±50 lbs. to allow for production build variation

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

C/K PICKUP
POWER TEAMS
ALL STATES EXCEPT CALIFORNIA
C/K1500 SERIES

POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE)
 (Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

| ENGINE | TRANSMISSION | | | AXLES | | | | | | GVWR |
|--|--------------|-------|-------|-------|------|------|------|------|------|---------|
| | 4-SP | 5-SP | AUTO | | 2.73 | 3.08 | 3.42 | 3.73 | 4.10 | |
| W/NA5 STANDARD EMISSION EQUIPMENT | | | | | | | | | | |
| -C10703-C10903 | | | | | | | | | | |
| LB4 V6 4.3 Liter
(262 Cu In)-EFI | MC0 | | | | GQ1 | GU4 | — | — | — | 52/5630 |
| | #MM4 | MM5 | MX1 | | GQ1 | GU4 | GU6 | — | — | 52/5630 |
| L03 V8 5.0 Liter
(305 Cu In)-EFI | | MM5 | MX0 | | — | GQ1 | GU6 | — | — | 52/5630 |
| | | | MX1/0 | | GQ1 | GU4 | GU6 | — | — | 52/5630 |
| L05 V8 5.7 Liter
(350 Cu In)-EFI | #MM4 | MM5 | | | — | GQ1 | GU6 | — | — | 52/5630 |
| | | | MX0 | | — | GQ1 | GU6 | GT4 | — | 52/5630 |
| -C10953 | | | | | | | | | | |
| LB4 V6 4.3 Liter
(262 Cu In)-EFI | MC0 | | | | GQ1 | GU4 | — | — | — | 6000 |
| | | | MX1 | | GQ1 | GU4 | GU6 | — | — | 6000 |
| L03 V8 5.0 Liter
(305 Cu In)-EFI | | MM5 | MX0 | | — | GQ1 | GU6 | — | — | 6000 |
| | | | MX1/0 | | GQ1 | GU4 | GU6 | — | — | 6000 |
| L05 V8 5.7 Liter
(350 Cu In)-EFI | | MM5 | | | — | GQ1 | GU6 | — | — | 6000 |
| | MM4 | MM5 | MX0 | | — | GQ1 | GU6 | GT4 | — | 6000 |
| -K10703-K10903 | | | | | | | | | | |
| LB4 V6 4.3 Liter
(262 Cu In)-EFI | MM4 | * MM5 | MX1/0 | | — | — | GQ1 | %GT4 | — | 5600 |
| L03 V8 5.0 Liter
(305 Cu In)-EFI | | * MM5 | MX1/0 | | — | — | GQ1 | GT4 | — | 5600 |
| L05 V8 5.7 Liter
(350 Cu In)-EFI | MM4 | * MM5 | MX0 | | — | — | GQ1 | GT4 | — | 5600 |
| -K10953 | | | | | | | | | | |
| LB4 V6 4.3 Liter
(262 Cu In)-EFI | MM4 | * MM5 | MX1/0 | | — | — | GQ1 | %GT4 | — | 6200 |
| L03 V8 5.0 Liter
(305 Cu In)-EFI | | * MM5 | MX1/0 | | — | — | GQ1 | GT4 | — | 6200 |
| L05 V8 5.7 Liter
(350 Cu In)-EFI | MM4 | * MM5 | MX0 | | — | — | GQ1 | GT4 | — | 6200 |
| W/NA6 HIGH ALTITUDE EMISSION EQUIPMENT | | | | | | | | | | |
| -C10703-C10903 | | | | | | | | | | |
| LB4 V6 4.3 Liter
(262 Cu In)-EFI | MC0 | | | | — | GQ1 | — | — | — | 52/5600 |
| | #MM4 | MM5 | MX1 | | — | GQ1 | GU6 | — | — | 52/5600 |
| | | | MX0 | | — | — | GQ1 | %GT4 | — | 52/5600 |
| L03 V8 5.0 Liter
(305 Cu In)-EFI | | MM5 | MX1/0 | | — | GQ1 | GU6 | — | — | 52/5600 |
| L05 V8 5.7 Liter
(350 Cu In)-EFI | #MM4 | MM5 | | | — | GQ1 | GU6 | — | — | 52/5600 |
| | | | MX0 | | — | GQ1 | GU6 | GT4 | — | 52/5600 |
| -C10953 | | | | | | | | | | |
| LB4 V6 4.3 Liter
(262 Cu In)-EFI | MC0 | | | | — | GQ1 | — | — | — | 6000 |
| | MM4 | | | | — | — | GQ1 | — | — | 6000 |
| | | MM5 | MX0 | | — | — | GQ1 | %GT4 | — | 6000 |
| | | | MX1 | | — | GQ1 | GU6 | — | — | 6000 |
| L03 V8 5.0 Liter
(305 Cu In)-EFI | | MM5 | MX1/0 | | — | GQ1 | GU6 | — | — | 6000 |
| L05 V8 5.7 Liter
(350 Cu In)-EFI | MM4 | MM5 | | | — | GQ1 | GU6 | — | — | 6000 |
| | | | MX0 | | — | GQ1 | GU6 | GT4 | — | 6000 |

%Reqs KC4 Eng. Oil Cooler
 *N/A C10703 Model
 • Standard Transmission

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

C/K PICKUP

POWER TEAMS

ALL STATES EXCEPT CALIFORNIA

C/K1500 SERIES

POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE)
(Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

| ENGINE | TRANSMISSION | | | AXLES | | | | | | GVWR |
|-------------------------------------|--------------|-------|-------|-------|------|------|------|------|------|------|
| | 4-SP | 5-SP | AUTO | 2.73 | 3.08 | 3.42 | 3.73 | 4.10 | | |
| -K10703-K10903 | | | | | | | | | | |
| LB4 V6 4.3 Liter
(262 Cu In)-EFI | MM4 | * MM5 | MX1/O | — | — | GQ1 | %GT4 | — | 5600 | |
| L03 V8 5.0 Liter
(305 Cu In)-EFI | | * MM5 | MX1/O | — | — | GQ1 | GT4 | — | 5600 | |
| L05 V8 5.7 Liter
(350 Cu In)-EFI | MM4 | * MM5 | MX0 | — | — | GQ1 | GT4 | — | 5600 | |
| -K10953 | | | | | | | | | | |
| LB4 V6 4.3 Liter
(262 Cu In)-EFI | MM4 | * MM5 | MX1/O | — | — | GQ1 | %GT4 | — | 6200 | |
| L03 V8 5.0 Liter
(305 Cu In)-EFI | | * MM5 | | — | — | GQ1 | GT4 | — | 6200 | |
| | | | MX1/O | — | — | GQ1 | GT4 | GT5 | 6200 | |
| L05 V8 5.7 Liter
(350 Cu In)-EFI | MM4 | * MM5 | | — | — | GQ1 | GT4 | — | 6200 | |
| | | | MX0 | — | — | GQ1 | GT4 | GT5 | 6200 | |

CALIFORNIA ONLY

C/K1500 SERIES

| ENGINE | TRANSMISSION | | | AXLES | | | | | | GVWR |
|--|--------------|-------|------|-------|------|------|------|------|---|---------|
| | 4-SP | 5-SP | AUTO | 2.73 | 3.08 | 3.42 | 3.73 | 4.10 | | |
| W/VF6 CALIFORNIA EMISSION REQUIREMENTS | | | | | | | | | | |
| -C10703-C10903 | | | | | | | | | | |
| LB4 V6 4.3 Liter
(262 Cu In)-EFI | MC0 | | | | GQ1 | GU4 | — | — | — | 52/5600 |
| | #MM4 | MM5 | MX0 | | — | GQ1 | GU6 | — | — | 52/5600 |
| L03 V8 5.0 Liter
(305 Cu In)-EFI | | | MX0 | | GQ1 | GU4 | GU6 | — | — | 52/5600 |
| L05 V8 5.7 Liter
(350 Cu In)-EFI | | | MX0 | | — | GQ1 | GU6 | GT4 | — | 52/5600 |
| -C10953 | | | | | | | | | | |
| LB4 4.3 Liter
(262 Cu In)-EFI | MC0 | | | | GQ1 | GU4 | — | — | — | 6000 |
| | MM4 | MM5 | MX0 | | — | GQ1 | GU6 | — | — | 6000 |
| L03 V8 5.0 Liter
(305 Cu In)-EFI | | | MX0 | | GQ1 | GU4 | GU6 | — | — | 6000 |
| L05 V8 5.7 Liter
(350 Cu In)-EFI | | | MX0 | | — | GQ1 | GU6 | GT4 | — | 6000 |
| -K10703-K10903 | | | | | | | | | | |
| LB4 V6 4.3 Liter
(262 Cu In)-EFI | MM4 | * MM5 | MX0 | | — | — | GQ1 | %GT4 | — | 5600 |
| L03 V8 5.0 Liter
(305 Cu In)-EFI | | | MX0 | | — | — | GQ1 | GT4 | — | 5600 |
| L05 V8 5.7 Liter
(350 Cu In)-EFI | | | MX0 | | — | — | GQ1 | GT4 | — | 5600 |
| -K10953 | | | | | | | | | | |
| LB4 V6 4.3 Liter
(262 Cu In)-EFI | MM4 | * MM5 | MX0 | | — | — | GQ1 | %GT4 | — | 6200 |
| L03 V8 5.0 Liter
(305 Cu In)-EFI | | | MX0 | | — | — | GQ1 | GT4 | — | 6200 |
| L05 V8 5.7 Liter
(350 Cu In)-EFI | | | MX0 | | — | — | GQ1 | GT4 | — | 6200 |

%Reqs KC4 Eng Oil Cooler
#N/A C10703
* Standard Transmission

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

C/K PICKUP
POWER TEAMS
ALL STATES EXCEPT CALIFORNIA
C/K2500 SERIES

POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE)
 (Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

| ENGINE | TRANSMISSION | | | AXLES | | | | GVWR |
|--|--------------|-------|-------|-------|------|------|------|------|
| | 4-SP | 5-SP | AUTO | | 3.42 | 3.73 | 4.10 | |
| W/NA5 STANDARD EMISSION EQUIPMENT | | | | | | | | |
| -C20903-C20953 | | | | | | | | |
| LB4 V8 4.3 Liter
(262 Cu In)-EFI | MM4 | * MM5 | MX1 | | GQ1 | %GT4 | — | 7200 |
| | | | MX0 | | GQ1 | %GT4 | %GT5 | 7200 |
| L03 V8 5.0 Liter
(305 Cu In)-EFI | | * MM5 | | | GQ1 | GT4 | — | 7200 |
| | | | MX1/O | | GQ1 | GT4 | GT5 | 7200 |
| L05 V8 5.7 Liter
(350 Cu In)-EFI | MM4 | * MM5 | | | GQ1 | GT4 | — | 7200 |
| | | | MX0 | | GQ1 | GT4 | GT5 | 7200 |
| LH6 Diesel 6.2 Liter V8
(379 Cu In) (Reqs B3J) | MM4 | | MX0 | | GQ1 | GT4 | — | 7200 |
| -K20903-K20953 | | | | | | | | |
| LB4 V8 4.3 Liter
(262 Cu In)-EFI | MM4 | * MM5 | MX1 | | GQ1 | %GT4 | — | 7200 |
| | | | MX0 | | GQ1 | %GT4 | %GT5 | 7200 |
| L03 V8 5.0 Liter
(305 Cu In)-EFI | | * MM5 | | | GQ1 | GT4 | — | 7200 |
| | | | MX1/O | | GQ1 | GT4 | GT5 | 7200 |
| L05 V8 5.7 Liter
(350 Cu In)-EFI | MM4 | * MM5 | | | GQ1 | GT4 | — | 7200 |
| | | | MX0 | | GQ1 | GT4 | GT5 | 7200 |
| LH6 Diesel 6.2 Liter V8
(379 Cu In) (Reqs B3J) | MM4 | | MX0 | | GQ1 | GT4 | GT5 | 7200 |
| | | | | | GQ1 | GT4 | — | 7200 |
| W/NA6 HIGH ALTITUDE EMISSION EQUIPMENT | | | | | | | | |
| -C20903-C20953 | | | | | | | | |
| LB4 V8 4.3 Liter
(262 Cu In)-EFI | MM4 | * MM5 | MX1 | | — | %GQ1 | — | 7200 |
| | | | MX0 | | — | %GQ1 | %GT5 | 7200 |
| L03 V8 5.0 Liter
(305 Cu In)-EFI | | | MX1/O | | GQ1 | GT4 | GT5 | 7200 |
| | | * MM5 | | | GQ1 | GT4 | — | 7200 |
| L05 V8 5.7 Liter
(350 Cu In)-EFI | MM4 | * MM5 | | | GQ1 | GT4 | — | 7200 |
| | | | MX0 | | GQ1 | GT4 | GT5 | 7200 |
| LH6 Diesel 6.2 Liter V8
(379 Cu In) (Reqs B3J) | MM4 | | | | — | GQ1 | GT5 | 7200 |
| | | | MX0 | | GQ1 | GT4 | — | 7200 |
| -K20903-K20953 | | | | | | | | |
| LB4 V8 4.3 Liter
(262 Cu In)-EFI | MM4 | * MM5 | MX1 | | GQ1 | %GT4 | — | 7200 |
| | | | MX0 | | — | %GQ1 | %GT5 | 7200 |
| L03 V8 5.0 Liter
(305 Cu In)-EFI | | * MM5 | | | GQ1 | GT4 | — | 7200 |
| | | | MX1/O | | GQ1 | GT4 | GT5 | 7200 |
| L05 V8 5.7 Liter
(350 Cu In)-EFI | MM4 | * MM5 | | | GQ1 | GT4 | — | 7200 |
| | | | MX0 | | GQ1 | GT4 | GT5 | 7200 |
| LH6 Diesel 6.2 Liter V8
(379 Cu In)
(Reqs B3J) | MM4 | | | | GQ1 | GT4 | — | 7200 |
| | | | MX0 | | GQ1 | GT4 | GT5 | 7200 |

CALIFORNIA ONLY
C/K2500 SERIES

| ENGINE | TRANSMISSION | | | | AXLES | | | | GVW'R |
|--|--------------|-------|------|--|-------|------|------|--|-------|
| | 4SP | 5SP | AUTO | | 3.42 | 3.73 | 4.10 | | |
| W/YF5 CALIFORNIA EMISSION REQUIREMENTS | | | | | | | | | |
| -C20903-C20953-K20903-K20953 | | | | | | | | | |
| LB4 V8 4.3 Liter
(262 Cu In)-EFI | MM4 | * MM5 | | | GQ1 | %GT4 | — | | 7200 |
| | | | MX0 | | GQ1 | %GT4 | %GT5 | | 7200 |
| L03 V8 5.0 Liter
(305 Cu In)-EFI | | | MX0 | | GQ1 | GT4 | GT5 | | 7200 |
| L05 V8 5.7 Liter
(350 Cu In)-EFI | | | MX0 | | GQ1 | GT4 | GT5 | | 7200 |

% Reqs KC4 Eng Oil Cooler
 * Standard Transmission

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

C/K PICKUP
POWER TEAMS
ALL STATES
C/K3500 SERIES

POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE)
 (Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

| ENGINE | TRANSMISSION | | AXLES | | | | GVWR | |
|--|--------------|------|-------|------|------|------|------|--------|
| | 4-SP | AUTO | | 3.42 | 3.73 | 4.10 | 4.56 | |
| W/NA5 STANDARD, NA6 HIGH ALTITUDE OR YF5 CALIFORNIA EMISSIONS | | | | | | | | |
| -C30903-C30953 | | | | | | | | |
| L05 V8 5.7 Liter
(350 Cu In)-EFI | MM4 | | | GQ1 | GT4 | GT5 | — | 8600 |
| | | MX1 | | — | GQ1 | GT5 | #HC4 | 8600 |
| #L19 V8 7.4 Liter
(454 Cu In)-EFI | MM4 | %MX1 | | — | — | GQ1 | #HC4 | #10000 |
| | | MX1 | | GQ1 | GT4 | #GT5 | — | 8600 |
| LL4 Diesel
6.2 Liter V8
(379 Cu In)(Reqs B3J) | MM4 | %MX1 | | — | GQ1 | #GT5 | #HC4 | #10000 |
| | | MX1 | | — | GQ1 | GT5 | — | 8600 |
| | MM4 | MX1 | | — | GQ1 | GT5 | HC4 | 8600 |
| | | %MX1 | | — | — | GQ1 | HC4 | #10000 |
| -K30903-K30953 | | | | | | | | |
| L05 5.7 Liter
(350 Cu In)-EFI | MM4 | | | GQ1 | GT4 | GT5 | — | 8600 |
| | | MX1 | | — | GQ1 | GT5 | #HC4 | 8600 |
| #L19 V8 7.4 Liter
(454 Cu In)-EFI | MM4 | MX1 | | GQ1 | GT4 | GT5 | — | 8600 |
| | | | | | | | | |
| LL4 Diesel 6.2 Liter V8
(379 Cu In)(Reqs B3J) | MM4 | | | — | GQ1 | GT5 | — | 8600 |
| | | MX1 | | — | GQ1 | GT5 | HC4 | 8600 |

#Reqs KC4 Eng Oil Cooler
 %Reqs V02 Cooler
 #N/A G80 Locking Differential

ENGINE RATINGS
ALL STATES

| SAE Net Ratings | A4.3 Liter
262 EFI V8 | A5.0 Liter
305 EFI V8 |
|---------------------|----------------------------------|----------------------------------|
| Net Horsepower | 160 @ 4000 rpm | 170 @ 4000 rpm |
| Net Torque, lb.-ft. | 235 @ 2400 rpm | 255 @ 2400 rpm |

| SAE Net Ratings | A6.7 Liter
390 EFI V8 | B6.7 Liter
350 EFI V8 | B7.4 Liter
454 EFI V8 |
|---------------------|----------------------------------|----------------------------------|----------------------------------|
| Net Horsepower | 210 @ 4000 rpm | 185 @ 4000 rpm | 230 @ 3600 rpm |
| Net Torque, lb.-ft. | 300 @ 2800 rpm | 295 @ 2400 rpm | 385 @ 1600 rpm |

| SAE Net Ratings | A6.2 Liter
379 V8 Diesel | B6.2 Liter
379 V8 Diesel |
|---------------------|-------------------------------------|-------------------------------------|
| Net Horsepower | †126 @ 3600 rpm | 143 @ 3600 rpm |
| Net Torque, lb.-ft. | †240 @ 2000 rpm | 247 @ 2000 rpm |

▲For models with a GVWR up to 8500 lbs
 ■For models with a GVWR from 8501 lbs. to 10,000 lbs.
 † When Automatic Transmission is ordered, ratings are
 Net Horsepower 140 @ 3600
 Net Torque, lb.-ft. 247 @ 2000

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

C/K PICKUP

GVWR SELECTOR—ALL STATES

| GVWR Rating (lbs) | †GAWR (lbs) | | Minimum Equipment Required for GVW Rating | | | |
|---------------------------|-------------|------|---|------|-------------------|--|
| | | | Tire Capacity (lbs ea) | | Chassis Equipment | |
| | Front | Rear | Front | Rear | | |
| C1500 SERIES REGULAR CAB | | | | | | |
| 5200 | 2904 | 2904 | 1452 | 1452 | Standard | |
| 5600 | 2950 | 3406 | 1703 | 1703 | | |
| C1500 SERIES EXTENDED CAB | | | | | | |
| 6000 | 3600 | 3686 | 1843 | 1843 | Standard | |
| K1500 SERIES REGULAR CAB | | | | | | |
| 5600 | *3350 | 3750 | 1930 | 1930 | Standard | |
| K1500 SERIES EXTENDED CAB | | | | | | |
| 6200 | 3860 | 3750 | 2205 | 2205 | Standard | |

†GAWR's shown are the maximum for each axle with equipment listed. Other GAWR's are available, and they are determined as the minimum capacity of either axle, springs or tires.
 *3450 for K10903 model.

FRONT AND REAR TIRE AVAILABILITY CHART—ALL STATES

C/K 1500 SERIES

Spare tire to match either front or rear tires must be ordered
 K1500 models require matching front and rear tread

| Description | Capacity
(lbs ea) | Highway | | On-Off Road | | Spare |
|------------------------------------|----------------------|---------|------|-------------|------|-------|
| | | Front | Rear | ★Front | Rear | |
| TUBELESS STEEL BELTED RADIAL | | | | | | |
| #P205/75R15 | 1452 | XCE | YCE | — | -- | ZCE |
| #P205/75R15 White Stripe | 1452 | XCG | YCG | — | -- | ZCG |
| #P225/75R15 | 1703 | XET | YET | — | -- | ZET |
| #P225/75R15 White Stripe | 1703 | XEU | YEU | — | -- | ZEU |
| #P225/75R15 White Lettered | 1703 | XEV | YEV | — | -- | ZEV |
| #P235/75R15 | 1843 | XFL | YFL | — | -- | ZFL |
| #P235/75R15 White Stripe | 1843 | XFM | YFM | — | -- | ZFM |
| #P235/75R15 White Letter | 1843 | XFN | YFN | — | -- | ZFN |
| ★LT225/75R16C | 1930 | XHE | YHE | — | -- | ZHE |
| ★LT225/75R16C White Outline Letter | 1930 | — | — | XHN | YHN | ZHN |
| ★LT225/75R16C | 1930 | — | — | XHJ | YHJ | ZHJ |
| ★LT225/75R16C White Supe | 1930 | XHV | YHV | — | -- | ZHV |
| •LT245/75R16C | 2205 | XBK | YBK | — | -- | ZBK |
| •LT245/75R16C White Stripe | 2205 | XBL | YBL | — | -- | ZBL |
| •LT245/75R16C | 2205 | — | — | XBN | YBN | ZBN |
| •LT245/75R16C White Letter | 2205 | — | — | XBK | YBK | ZBK |
| ♦LT265/75R16C | 2470 | — | — | XGL | YGL | ZGL |
| ♦LT265/75R16C White Outline Letter | 2470 | — | — | XGM | YGM | ZGM |

Available on C1500 models only.
 ★ Available on K1500 models only.
 • Available on K1500 Extended Cab models only.
 ♦ Available on K1500 models only. Requires Aluminum Wheels.

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

C/K PICKUP

GVWR SELECTOR—ALL STATES

| GVWR Rating (lbs) | †GAWR (lbs) | | Minimum Equipment Required for GVW Rating | | |
|---------------------------|-------------|------|---|------|-------------------|
| | | | Tire Capacity (lbs ea) | | Chassis Equipment |
| | Front | Rear | Front | Rear | |
| C2500 SERIES REGULAR CAB | | | | | |
| 7200 | ▲3150 | 4670 | 2335 | 2335 | Standard |
| C2500 SERIES EXTENDED CAB | | | | | |
| 7200 | 3600 | 4670 | 2335 | 2335 | Standard |
| K2500 SERIES REGULAR CAB | | | | | |
| 7200 | 3925 | 4670 | 2335 | 2335 | Standard |
| K2500 SERIES EXTENDED CAB | | | | | |
| 7200 | 3925 | 4410 | 2205 | 2205 | Standard |

†GAWR's shown are the maximum for each axle with equipment listed. Other GAWR's are available, and they are determined as the minimum capacity of either axle, springs or tires
 ΔRated 3400 lbs for diesel engine models

FRONT AND REAR TIRE AVAILABILITY CHART—ALL STATES

C/K2500 SERIES

Spare tire to match either front or rear tires is available at extra cost
 K2500 models require matching front and rear tread

| Description | Capacity
(lbs ea) | Highway | | On-Off Road | | Spare |
|------------------------------------|----------------------|----------|----------|-------------|----------|------------|
| | | Front | Rear | *Front | Rear | |
| TUBELESS STEEL BELTED RADIAL | | | | | | |
| #LT225/75R16D | 2335 | XHP
— | YHP | —
— | —
YHR | ZHP
ZHR |
| #LT225/75R16D White Stripe | 2335 | XHQ | YHQ | — | — | ZHQ |
| *LT225/75R16D | 2335 | — | — | XHR | YHR | ZHR |
| ΔLT245/75R16C | 2205 | XBK | YBK | — | — | ZBK |
| ΔLT245/75R16C White Stripe | 2205 | XBL | YBL | — | — | ZBL |
| ΔLT245/75R16C | 2205 | — | — | XBN | YBN | ZBN |
| ΔLT245/75R16C White Outline Letter | 2205 | — | — | XBX | YBX | ZBX |
| #LT245/75R16E | 3000 | XHH
— | YHH
— | —
— | —
YGK | ZHH
ZGK |
| *LT245/75R16E | 3000 | — | — | XGK | YGK | ZGK |

#Not available on K20953 Extended Cab models.
 ★Available on K20903 Regular Cab models only.
 ΔAvailable on K20953 Extended Cab models only

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

C/K PICKUP

GVWR SELECTOR—ALL STATES

| GVW Rating (lbs) | †GAWR (lbs) | | Minimum Equipment Required for GVW Rating | | |
|---------------------------|-------------|------|---|--------------|----------------------------------|
| | Front | Rear | Tire Capacity (lbs ea) | | Chassis Equipment |
| | | | Front | Rear | |
| C3500 SERIES REGULAR CAB | | | | | |
| 8600 | 3800 | 6000 | 3000 | 3000 | Standard |
| 10,000 | 3800 | 7500 | 1930 | 1875 (Duals) | Dual Rear Wheel Provisions (R05) |
| C3500 SERIES EXTENDED CAB | | | | | |
| 8600 | 3800 | 6000 | 3000 | 3000 | Standard |
| 10,000 | 3800 | 7500 | 1930 | 1875 (Duals) | Dual Rear Wheel Provisions (R05) |
| K3500 SERIES REGULAR CAB | | | | | |
| 8600 | 4250 | 6000 | 3000 | 3000 | Standard |
| K3500 SERIES EXTENDED CAB | | | | | |
| 8600 | 4250 | 6000 | 3000 | 3000 | Standard |

†GAWR's shown are the maximum for each axle with equipment listed. Other GAWR's are available, and they are determined as the minimum capacity of either axle, springs or tires.

FRONT AND REAR TIRE AVAILABILITY CHART—ALL STATES

C/K3500 SERIES

Spare tire to match either front or rear tires is available at extra cost
K3500 models require matching front and rear tread

| Description | Capacity
(lbs each) | | Highway | | | On-Off Road | | | Spare |
|------------------------------|--------------------------|--------------|---------|----------------|--------------|-------------|----------------|--------------|-------|
| | Front/
Single
Rear | Dual
Rear | Front | Single
Rear | Dual
Rear | †Front | Single
Rear | Dual
Rear | |
| TUBELESS Steel Belted Radial | | | | | | | | | |
| #LT225/75R16C | 1930 | — | XHE | — | — | — | — | — | |
| LT225/75R16D | — | 1875 | — | — | YHP | — | — | — | ZHP |
| #LT225/75R16D | 2335 | 1875 | XHP | — | YHP | — | — | YHR | ZHR |
| #LT225/75R16D White Stripe | 2335 | 1875 | XHQ | — | YHQ | — | — | — | ZHQ |
| #LT225/75R16C White Stripe | 1930 | — | XHV | — | — | — | — | — | — |
| #LT225/75R16D White Stripe | — | 1875 | — | — | YHQ | — | — | — | ZHQ |
| †LT245/75R16E | 3000 | 3000 | — | — | — | XGK | YGK | — | ZGK |
| LT245/75R16E | 3000 | 3000 | XHH | YHH | — | — | — | — | ZHH |
| #LT245/75R16E | | | XHH | — | — | — | YGK | — | ZGK |
| TUBE-TYPE Nylon | | | | | | | | | |
| #7.50-16D | 2440 | 2140 | XPF | — | YPF | — | — | — | ZPF |

#Available on C3500 models only

†Available on K3500 models only

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

NOTES

C/K PICKUP

THE FOLLOWING EQUIPMENT IS STANDARD ON DIESEL ENGINE MODELS (ALSO SEE STANDARD SPECIFICATIONS PAGES)

- Low Coolant Sensor
- Poly-wrapped Paper Element Air Cleaner
- Engine Block Heater (600 watts, 120 volts)
- Water/fuel separator unit which incorporates a water sensor and sending unit, a fuel filter, a fuel heater and drain capability
- Hydraulic Power-assisted Brakes
- Engine Oil Cooler
- Dual 540 Cold Cranking Amp/115 min. Reserve Capacity Batteries
- HD Radiator
- Single Exhaust System
- Additional Insulation:
 - Cab-to-fender insulators
 - Fiberglass hood insulator
 - Fiberglass engine compartment firewall insulator
 - Cowl side spray-on deadener
 - Driver compartment dash mat with increased mastic layer
 - Resinated cotton and mastic floor insulation
 - Full cowl interior trim panels with resinated cotton insulation
 - Vinyl-coated rubber floor mat for regular cab models
- Warning Lights: Glow Plugs, Water-in-fuel (or fuel filter), and Low Coolant
- Diesel Engine Identification:
 - "Diesel Fuel Only" label inside fuel filler door

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

C-K PICKUP

2-WHEEL DRIVE (5200-lb - 10,000-lb GVW)

4-WHEEL DRIVE (5600-lb - 8600-lb GVW)

1988 VEHICLES WITH STANDARD EQUIPMENT

Prices shown are effective with initial shipments of 1988 model motor vehicles

| Description | Model Number | Body Code | Wheel Base | Factory D&H(a) | List Price | Mfr's Suggested Retail Price* | Group Number |
|--|--------------|-----------|------------|----------------|------------|-------------------------------|--------------|
| <i>(All models have regular cab unless otherwise indicated)</i> | | | | | | | |
| ♦ 6-Cylinder 4.3 Liter (262 Cu. In.) E.F.I. V6 Gasoline Engine-Engine Ordering Code LB4 | | | | | | | |
| C1500 Series 2-Wheel Drive | | | | | | | |
| Fleetside (6 1/2-ft) | CC10703 | E63 | 117.5" | N.A. | 9347.00 | 9347.00 | 19 |
| Fleetside (8-ft) | CC10803 | E63 | 131.5" | N.A. | 9531.00 | 9531.00 | 19 |
| Extended Cab | | | | | | | |
| Fleetside (8-ft) | CC10853 | E63 | 155.5" | N.A. | 10722.00 | 10722.00 | 19 |
| C2500 Series 2-Wheel Drive | | | | | | | |
| Fleetside (8-ft) | CC20903 | E63 | 131.5" | N.A. | 10384.00 | 10384.00 | 19 |
| Extended Cab | | | | | | | |
| Fleetside (8-ft) | CC20953 | E63 | 155.5" | N.A. | 11684.00 | 11684.00 | 19 |
| K1500 Series 4-Wheel Drive | | | | | | | |
| Fleetside (6 1/2-ft) | CK10703 | E63 | 117.5" | N.A. | 11587.00 | 11587.00 | 19 |
| Fleetside (8-ft) | CK10903 | E63 | 131.5" | N.A. | 11774.00 | 11774.00 | 19 |
| Extended Cab | | | | | | | |
| Fleetside (8-ft) | CK10953 | E63 | 155.5" | N.A. | 12864.00 | 12864.00 | 19 |
| K2500 Series 4-Wheel Drive | | | | | | | |
| Fleetside (8-ft) | CK20903 | E63 | 131.5" | N.A. | 11840.00 | 11840.00 | 19 |
| Extended Cab | | | | | | | |
| Fleetside (8-ft) | CK20953 | E63 | 155.5" | N.A. | 13007.00 | 13007.00 | 19 |
| ♦ 8-Cylinder 5.7 Liter (350 Cu. In.) E.F.I. V8 Gasoline Engine-Engine Ordering Code L05 | | | | | | | |
| C3500 Series 2-Wheel Drive | | | | | | | |
| Fleetside (8-ft) | CC30903 | E63 | 131.5" | N.A. | 11405.00 | 11405.00 | 19 |
| Extended Cab | | | | | | | |
| Fleetside (8-ft) | CC30953 | E63 | 155.5" | N.A. | 12563.00 | 12563.00 | 19 |
| K3500 Series 4-Wheel Drive | | | | | | | |
| Fleetside (8-ft) | CK30903 | E63 | 131.5" | N.A. | 13352.00 | 13352.00 | 19 |
| Extended Cab | | | | | | | |
| Fleetside (8-ft) | CK30953 | E63 | 155.5" | N.A. | 14352.00 | 14352.00 | 19 |
| ♦ 8-Cylinder 6.2 Liter (379 Cu. In.) L.D. Diesel V8 Engine-Engine Ordering Code LH6 | | | | | | | |
| C2500 Series 2-Wheel Drive | | | | | | | |
| Fleetside (8-ft) | CC20903 | E63 & B3J | 131.5" | N.A. | 12569.00 | 12569.00 | 19 |
| Extended Cab | | | | | | | |
| Fleetside (8-ft) | CC20953 | E63 & B3J | 155.5" | N.A. | 13869.00 | 13869.00 | 19 |
| K2500 Series 4-Wheel Drive | | | | | | | |
| Fleetside (8-ft) | CK20903 | E63 & B3J | 131.5" | N.A. | 14443.00 | 14443.00 | 19 |
| Extended Cab | | | | | | | |
| Fleetside (8-ft) | CK20953 | E63 & B3J | 155.5" | N.A. | 15340.00 | 15340.00 | 19 |
| ♦ 8-Cylinder 6.2 Liter (379 Cu. In.) H.D. Diesel V8 Engine-Engine Ordering Code LL4 | | | | | | | |
| C3500 Series 2-Wheel Drive | | | | | | | |
| Fleetside (8-ft) | CC30903 | E63 & B3J | 131.5" | N.A. | 12803.00 | 12803.00 | 19 |
| Extended Cab | | | | | | | |
| Fleetside (8-ft) | CC30953 | E63 & B3J | 155.5" | N.A. | 14028.00 | 14028.00 | 19 |
| K3500 Series 4-Wheel Drive | | | | | | | |
| Fleetside (8-ft) | CK30903 | E63 & B3J | 131.5" | N.A. | 14515.00 | 14515.00 | 19 |
| Extended Cab | | | | | | | |
| Fleetside (8-ft) | CK30953 | E63 & B3J | 155.5" | N.A. | 15515.00 | 15515.00 | 19 |

★ Manufacturer's Suggested Retail Prices do not include applicable destination charges, state and local taxes, license fees, optional equipment or special items or services.

♦ Refer to Dealer Order Guide for California Requirements.

(a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1988 model motor vehicles

| Description | Option Number | Factory D&H(a) | List Price | MP's Suggested Retail Price |
|--|---------------|----------------------|------------|-----------------------------|
| Scottsdale/Sierra SLX: (See Interior and Exterior Color Selection Charts) Includes VG3 Bumper with rub strip and rubber color-keyed floor covering. | | | | |
| C-K 1,2 Regular Cab only. Also includes B84 Black Body Side and B74 Wheel Opening Moldings | Z62 | N.A. | 353.00 | 353.00 |
| C-K 1,2 Extended Cab only. Also includes B84 Black Body Side and B74 Wheel Opening Moldings | Z62 | N.A. | 263.00 | 263.00 |
| C3 Regular Cab only | | | | |
| Without R05 Dual Rear Wheels. Also includes B84 Black Body Side and B74 Wheel Opening Moldings | Z62 | N.A. | 353.00 | 353.00 |
| With R05 Dual Rear Wheels | Z62 | N.A. | 248.00 | 248.00 |
| C3 Extended Cab only | | | | |
| Without R05 Dual Rear Wheels. Also includes B84 Black Body Side and B74 Wheel Opening Moldings | Z62 | N.A. | 263.00 | 263.00 |
| With R05 Dual Rear Wheels | Z62 | N.A. | 158.00 | 158.00 |
| K3 Regular Cab. Also includes B84 Black Body Side Moldings | Z62 | N.A. | 322.00 | 322.00 |
| K3 Extended Cab only. Also includes B84 Black Body Side Moldings | Z62 | N.A. | 232.00 | 232.00 |
| Silverado/Sierra SLE: Available only when custom cloth or custom vinyl seats are specified. Includes color-keyed carpeting for front seat area, cab back insulation, visor mirror, V22 Deluxe Front Appearance, VG3 Bumper with rub strip, U37 Cigarette Lighter and N31 Custom Steering Wheel. | | | | |
| C-K 1,2 Regular Cab only. Also includes B85 Bright Body Side Moldings and B96 Bright Wheel Opening Moldings. | YE9 | N.A. | 681.00 | 681.00 |
| C-K 1,2 Extended Cab only. Also includes B85 Bright Body Side Moldings and B96 Bright Wheel Opening Moldings and rear seat area carpeting | YE9 | N.A. | 611.00 | 611.00 |
| C3 Regular Cab only | | | | |
| Without R05 Dual Rear Wheels. Also includes B85 Bright Body Side Moldings and B96 Bright Wheel Opening Moldings | YE9 | N.A. | 681.00 | 681.00 |
| With R05 Dual Rear Wheels | YE9 | N.A. | 524.00 | 524.00 |
| C3 Extended Cab only. Also includes rear seat area carpeting | | | | |
| Without R05 Dual Rear Wheels. Also includes B85 Bright Body Side Moldings and B96 Bright Wheel Opening Moldings | YE9 | N.A. | 611.00 | 611.00 |
| With R05 Dual Rear Wheels | YE9 | N.A. | 454.00 | 454.00 |
| K3 Regular Cab only. Also includes B85 Bright Body Side Moldings | YE9 | N.A. | 650.00 | 650.00 |
| K3 Extended Cab only. Also includes B85 Bright Body Side Moldings and rear seat area carpeting | YE9 | N.A. | 580.00 | 580.00 |
| Seat Trim: (See Interior and Exterior Color Selection Chart for availability and ordering information). | | | | |
| V**1 Vinyl Bench | ... | NO ADDITIONAL CHARGE | | |
| V**3 Vinyl Split Bench. Extended Cab only. Not available when YE9 or Z62 is specified. Available only when AM7 Folding Rear Seat is specified | ... | N.A. | 125.00 | 125.00 |
| C**1 Cloth Bench. Regular Cab only. Not available when YE9 is specified | ... | NO ADDITIONAL CHARGE | | |
| Without Z62 | ... | NO ADDITIONAL CHARGE | | |
| With Z62 | ... | NO ADDITIONAL CHARGE | | |
| L**1 Custom Cloth Bench. Regular Cab only. Available only when YE9 is specified | ... | NO ADDITIONAL CHARGE | | |
| L**3 Custom Cloth Split Bench Seat. Extended Cab only. Available only when YE9 and AM7 Folding Rear Seat are specified | ... | N.A. | 125.00 | 125.00 |
| L**2 Custom Cloth Bucket Seat. Available only when YE9 and AM7 Folding Rear Seat are specified | ... | N.A. | 100.00 | 100.00 |
| Regular Cab only | ... | N.A. | 125.00 | 125.00 |
| Extended Cab only | ... | N.A. | 125.00 | 125.00 |

- (a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
 ◇ State and local taxes not included.

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1988 model motor vehicles

| Description | Option Number | Factory D&H(a) | List Price | MSRP Suggested Retail Price ◇ |
|--|---------------|----------------------|------------|-------------------------------|
| Seat Trim: (Continued) | | | | |
| <i>X**3 Custom Vinyl Split Bench Seat. Extended Cab only. Available only when AM7 Folding Rear Seat and YE9 or Z62 is specified</i> | | | | |
| With Z62 | ... | N.A. | 125.00 | 125.00 |
| With YE9 | ... | N.A. | 125.00 | 125.00 |
| <i>X**2 Custom Vinyl Bucket Seat. Available only when AM7 Folding Rear Seat and Z62 or YE9 is specified</i> | | | | |
| Regular Cab only. | ... | N.A. | 152.00 | 152.00 |
| With Z62 | ... | N.A. | 100.00 | 100.00 |
| With YE9 | ... | N.A. | 125.00 | 125.00 |
| Extended Cab only | ... | N.A. | 125.00 | 125.00 |
| With Z62 | ... | N.A. | 125.00 | 125.00 |
| With YE9 | ... | N.A. | 125.00 | 125.00 |
| <i>X**1 Custom Vinyl Bench Seat. Available only when YE9 or Z62 is specified</i> | | | | |
| Regular Cab only. | ... | N.A. | 52.00 | 52.00 |
| With Z62 | ... | NO ADDITIONAL CHARGE | | |
| With YE9 | ... | NO ADDITIONAL CHARGE | | |
| Extended Cab only. | ... | NO ADDITIONAL CHARGE | | |
| With Z62 | ... | NO ADDITIONAL CHARGE | | |
| With YE9 | ... | NO ADDITIONAL CHARGE | | |
| Paints, Exterior: (See Interior and Exterior Color Selection Chart for ordering information and paint application). | | | | |
| Solid | ZY1 | NO ADDITIONAL CHARGE | | |
| Conventional Two-Tone. | ZY2 | N.A. | 132.00 | 132.00 |
| Special Two-Tone | ZY3 | N.A. | 215.00 | 215.00 |
| Deluxe Two-Tone. | ZY4 | N.A. | 243.00 | 243.00 |
| Emission Systems: Dealer Note - One of the following emission options must be specified. (See Power Teams Chart for availability and complete specifications). | | | | |
| <i>California Emission Requirements. Includes: all testing, equipment and/or certification necessary for registration in the State of California. Not available when NA6 High Altitude Emissions or LH6 6.2 Diesel Engine are specified.</i> | | | | |
| High Altitude Emission Equipment. Not available when NA5 Standard or YF5 California Emissions is specified. | YF5 | N.A. | 99.00 | 99.00 |
| Standard Emission Equipment. Not available when NA6 High Altitude or YF5 California Emissions are specified | NA6 | NO ADDITIONAL CHARGE | | |
| Standard Emission Equipment. Not available when NA6 High Altitude or YF5 California Emissions are specified | NA6 | NO ADDITIONAL CHARGE | | |
| Engines: (See Power Teams Chart for availability and complete specifications). | | | | |
| Gasoline | | | | |
| 4.3 Liter (262 Cu. In.) E.F.I. V6. Standard on C-K1,2 Series only | LB4 | NO ADDITIONAL CHARGE | | |
| 5.0 Liter (305 Cu. In.) E.F.I. V8. Available on C-K1,2 Series only. | L03 | N.A. | 485.00 | 495.00 |
| 5.7 Liter (350 Cu. In.) E.F.I. V8. Standard on C-K3 Series | L05 | N.A. | 740.00 | 740.00 |
| 7.4 Liter (454 Cu. In.) E.F.I. V8. C-K3 Series only. | L19 | N.A. | 385.00 | 385.00 |
| Diesel | | | | |
| 6.2 Liter (379 Cu. In.) L.D. V8 Diesel. C-K2 Series only. Not available when YF5 California Emission Requirements is specified. Available only when B3J Diesel Equipment is specified. | LH6 | NO ADDITIONAL CHARGE | | |
| 6.2 Liter (379 Cu. In.) H.D. V8 Diesel. C-K3 Series only. Available only when B3J Diesel Equipment is specified. | LL4 | NO ADDITIONAL CHARGE | | |
| Transmissions: (See Power Teams Chart for availability and complete specifications). | | | | |
| 3-Speed Automatic. | | | | |
| C-K1,2 Series only. Not available when YF5 California Emissions is specified. Available only when L03 5.0 Liter or LB4 4.3 Liter Engine is specified. | MX1 | N.A. | 565.00 | 565.00 |
| C-K3 Series only | MX1 | N.A. | 565.00 | 565.00 |

- (a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
 ◇ State and local taxes not included.

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1988 model motor vehicles

| Description | Option Number | Factory D&H(a) | List Price | MT's Suggested Retail Price |
|---|---------------|----------------------|------------|-----------------------------|
| Transmissions: (Continued) | | | | |
| 4-Speed Manual H.D. With Creeper Low. Standard on C-K2 Series when 83J Diesel Equipment is specified. Standard on C-K3 Series. Not available on C10703. | | | | |
| C1 Series only | MM4 | N.A. | 98.00 | 98.00 |
| K1 and C-K2 Series only | MM4 | N.A. | 98.00 | 98.00 |
| 4-Speed Manual Standard on C1 Series | MC0 | NO ADDITIONAL CHARGE | | |
| 5-Speed Manual with Overdrive. Standard on K1, C-K2 Series | MM5 | N.A. | 185.00 | 185.00 |
| 4-Speed Automatic with Overdrive. C-K1-2 Series only. | MX0 | N.A. | 735.00 | 735.00 |
| Axles, Rear: (See Power Teams Chart for option number selection, availability and complete specifications) | | | | |
| Optional Ratio | | N.A. | 38.00 | 38.00 |
| Locking Differential | G80 | N.A. | 252.00 | 252.00 |
| Tires: (See Tire Charts for Tire Availability) | | | | |
| Spare tire carrier included when spare tire is specified on C-K-2,3 series | | | | |
| All rim sizes are 6.00" except when N90 or PA6 Wheels are specified on C1 Series. | | | | |
| All rim sizes are 6.50" on C K2 Series or C-K3 Series without R05 Dual Rear Wheels and K1 Series except with PF4 Wheels | | | | |
| All rim sizes are 6.00" on C3 Series with R05 Dual Rear Wheels. | | | | |
| Dealer Note: When dual rear tires are specified, R05 Dual Rear Wheels will be applied to the order. | | | | |
| THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTED ON THE INVOICE SEPARATELY | | | | |
| For complete specifications and ordering information, see "OTHER OPTIONS" Section. | | | | |
| TUBELESS | | | | |
| P205/75R15 All Seasons Steel Belted Radial Ply Blackwall
(Maximum Capacity 1452-lbs) | | | | |
| C1 Series only. | | | | |
| Front | XCE | NO ADDITIONAL CHARGE | | |
| Rear | YCE | NO ADDITIONAL CHARGE | | |
| Spare | ZCE | NO ADDITIONAL CHARGE | | |
| P205/75R15 All Seasons Steel Belted Radial Ply Whitewall
(Maximum Capacity 1452-lbs) | | | | |
| C1 Series only. | | | | |
| Front | XCG | N.C. | 28.00 | 28.00 |
| Rear | YCG | N.C. | 28.00 | 28.00 |
| Spare | ZCG | N.C. | 14.00 | 14.00 |
| P225/75 R15 All Seasons Steel Belted Radial Ply White Lettered
(Maximum Capacity 1703-lbs) | | | | |
| C1 Series only | | | | |
| Front | XEV | N.C. | 100.00 | 100.00 |
| Rear | YEV | N.C. | 100.00 | 100.00 |
| Spare | ZEV | N.C. | 50.00 | 50.00 |
| P225/75R15 All Seasons Steel Belted Radial Ply Blackwall
(Maximum Capacity 1703-lbs) | | | | |
| C1 Series only | | | | |
| Front | XET | N.C. | 50.00 | 50.00 |
| Rear | YET | N.C. | 50.00 | 50.00 |
| Spare | ZET | N.C. | 25.00 | 25.00 |
| P225/75R15 All Seasons Steel Belted Radial Ply Whitewall
(Maximum Capacity 1703-lbs) | | | | |
| C1 Series only | | | | |
| Front | XEU | N.C. | 86.00 | 86.00 |
| Rear | YEU | N.C. | 86.00 | 86.00 |
| Spare | ZEU | N.C. | 43.00 | 43.00 |
| P235/75R15 All Seasons Steel Belted Radial Ply Blackwall
(Maximum Capacity 1843-lbs). Standard on C1 Extended Cab | | | | |
| C1 Regular Cab only | | | | |
| Front | XFL | N.C. | 78.00 | 78.00 |
| Rear | YFL | N.C. | 78.00 | 78.00 |
| Spare | ZFL | N.C. | 39.00 | 39.00 |

- (a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
 ◇ State and local taxes not included

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1988 model motor vehicles

| Description | Option Number | Factory D&H(a) | List Price | MT's Suggested Retail Price |
|---|---------------|----------------------|------------|-----------------------------|
| P235/75R15 All Seasons Steel Belted Radial Ply Whitewall
(Maximum Capacity 1843-lbs). | | | | |
| Front | | | | |
| C1 Regular Cab only | XFM | N.C. | 114.00 | 114.00 |
| C1 Extended Cab only | XFM | N.C. | 36.00 | 36.00 |
| Rear | | | | |
| C1 Regular Cab only | YFM | N.C. | 114.00 | 114.00 |
| C1 Extended Cab only | YFM | N.C. | 36.00 | 36.00 |
| Spare | | | | |
| C1 Regular Cab only | ZFM | N.C. | 57.00 | 57.00 |
| C1 Extended Cab only | ZFM | N.C. | 18.00 | 18.00 |
| P235/75 R15 All Seasons Steel Belted Radial Ply White Lettered
(Maximum Capacity 1843-lbs) | | | | |
| Front | | | | |
| C1 Regular Cab only | XFN | N.C. | 128.00 | 128.00 |
| C1 Extended Cab only | XFN | N.C. | 50.00 | 50.00 |
| Rear | | | | |
| C1 Regular Cab only | YFN | N.C. | 128.00 | 128.00 |
| C1 Extended Cab only | YFN | N.C. | 50.00 | 50.00 |
| Spare | | | | |
| C1 Regular Cab only | ZFN | N.C. | 64.00 | 64.00 |
| C1 Extended Cab only | ZFN | N.C. | 25.00 | 25.00 |
| LT225/75R16C All Seasons Steel Belted Radial Ply Blackwall
(Maximum Capacity 1930-lbs) Standard on K1 Regular Cab | | | | |
| Front | | | | |
| K1 Series only | XHE | NO ADDITIONAL CHARGE | | |
| C3 Series with R05 Dual Rear Wheels | XHE | N.C. (-102.00) | | (-102.00) |
| Rear | YHE | NO ADDITIONAL CHARGE | | |
| Spare | ZHE | NO ADDITIONAL CHARGE | | |
| LT225/75R16C All Seasons Steel Belted Radial Ply Whitewall
(Maximum Capacity 1930-lbs). | | | | |
| K1 Series only. | | | | |
| Front | XHV | N.C. | 36.00 | 36.00 |
| Rear | YHV | N.C. | 36.00 | 36.00 |
| Spare | ZHV | N.C. | 18.00 | 18.00 |
| LT225/75R16C On-Off Road Steel Belted Radial Ply Blackwall
(Maximum Capacity 1930-lbs). | | | | |
| K1 Series only. | | | | |
| Front | XHJ | N.C. | 22.00 | 22.00 |
| Rear | YHJ | N.C. | 22.00 | 22.00 |
| Spare | ZHJ | N.C. | 11.00 | 11.00 |
| LT225/75R16C On-Off Road Steel Belted Radial Ply White Outline Lettered
(Maximum Capacity 1930-lbs) | | | | |
| K1 Series only | | | | |
| Front | XHN | N.C. | 72.00 | 72.00 |
| Rear | YHN | N.C. | 72.00 | 72.00 |
| Spare | ZHN | N.C. | 36.00 | 36.00 |
| LT225/75R16D All Seasons Steel Belted Radial Ply Blackwall
(Maximum Capacity each. Front 2335-lbs) (Dual Rear 1875-lbs) | | | | |
| Front. Standard on C2 Series or K2 Regular Cab. C3 Series with R05 Dual Rear Wheels | XHP | N.C. | (-68.00) | (-68.00) |
| Rear. Standard on C2 Series or K2 Regular Cab. C3 Series with R05 Dual Rear Wheels | YHP | N.C. | 430.00 | 430.00 |
| Spare | | | | |
| K2 Regular Cab and C2 Series | ZHP | N.C. | 289.00 | 289.00 |
| C3 Series with R05 Dual Rear Wheels | ZHP | N.C. | 300.00 | 300.00 |
| LT225/75R16D All Seasons Steel Belted Radial Ply Whitewall
(Maximum Capacity 2335-lbs) (Dual Rear 1895-lbs) | | | | |
| Front. K2 Regular Cab and C2 Series | XHQ | N.C. | 36.00 | 36.00 |
| Rear. K2 Regular Cab and C2 Series | YHQ | N.C. | 36.00 | 36.00 |
| Spare. K2 Regular Cab and C2 Series | ZHQ | N.C. | 307.00 | 307.00 |

(a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
 ◇ State and local taxes not included.

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1988 model motor vehicles

| Description | Option Number | Factory D&H(a) | List Price | Mfr's Suggested Retail Price |
|---|---------------|----------------------|------------|------------------------------|
| LT225/75R16D On Off Road Steel Belted Radial Ply Blackwall
(Maximum Capacity 2335-lbs) (Dual Rear 1875-lbs) | | | | |
| Front. K2 Regular Cab only | XHR | N.C. | 22.00 | 22.00 |
| Rear. | | | | |
| K2 Regular Cab and C2 Series | YHR | N.C. | 22.00 | 22.00 |
| C3 Series with R05 Dual Rear Wheels | YHR | N.C. | 474.00 | 474.00 |
| Spare. | | | | |
| K2 Regular Cab and C2 Series | ZHR | N.C. | 300.00 | 300.00 |
| C3 Series with R05 Dual Rear Wheels | ZHR | N.C. | 311.00 | 311.00 |
| LT245/75R16C All Seasons Steel Belted Radial Ply Blackwall
(Maximum Capacity 3000-lbs) | | | | |
| Front. Standard on K1-2 Extended Cab | XBK | NO ADDITIONAL CHARGE | | |
| Rear. Standard on K1-2 Extended Cab | YBK | NO ADDITIONAL CHARGE | | |
| Spare. | | | | |
| K1 Extended Cab only. Standard | ZBK | NO ADDITIONAL CHARGE | | |
| K2 Extended Cab only | ZBK | N.C. | 300.00 | 300.00 |
| LT 245/75 R16C All Seasons Steel Belted Radial Ply Whitewall
(Maximum Capacity 2205-lbs) | | | | |
| K1-2 Extended Cab only | | | | |
| Front | XBL | N.C. | 34.00 | 34.00 |
| Rear | YBL | N.C. | 34.00 | 34.00 |
| Spare | | | | |
| K1 Extended Cab only | ZBL | N.C. | 17.00 | 17.00 |
| K2 Extended Cab only | ZBL | N.C. | 317.00 | 317.00 |
| LT 245/75 R16C On Off Road Steel Belted Radial Ply Blackwall
(Maximum Capacity 2205-lbs) | | | | |
| K1-2 Extended Cab only | | | | |
| Front | XBN | N.C. | 22.00 | 22.00 |
| Rear | YBN | N.C. | 22.00 | 22.00 |
| Spare | | | | |
| K1 Extended Cab only | ZBN | N.C. | 11.00 | 11.00 |
| K2 Extended Cab only | ZBN | N.C. | 311.00 | 311.00 |
| LT 245/75R16C On Off Road Steel Belted Radial Ply White Lettered
(Maximum Capacity 2205-lbs) | | | | |
| K1-2 Extended Cab only | | | | |
| Front | XBX | N.C. | 72.00 | 72.00 |
| Rear | YBX | N.C. | 72.00 | 72.00 |
| Spare | | | | |
| K1 Extended Cab only | ZBX | N.C. | 36.00 | 36.00 |
| K2 Extended Cab only | ZBX | N.C. | 336.00 | 336.00 |
| LT245/75R16E All Seasons Steel Belted Radial Ply Blackwall
(Maximum Capacity 3000-lbs). Standard on C-K3 Series | | | | |
| Front. K2 Regular Cab and C2 Series | XHH | N.C. | 90.00 | 90.00 |
| Rear. K2 Regular Cab and C2 Series | YHH | N.C. | 90.00 | 90.00 |
| Spare | ZHH | N.C. | 334.00 | 334.00 |
| LT245/75R16E On Off Road Steel Belted Radial Ply Blackwall
(Maximum Capacity 3000-lbs) | | | | |
| Front | | | | |
| K2 Regular Cab only | XGK | N.C. | 112.00 | 112.00 |
| K3 Series only | XGK | N.C. | 22.00 | 22.00 |
| Rear | | | | |
| K2 Regular Cab and C2 Series | YGK | N.C. | 112.00 | 112.00 |
| C-K3 Series only | YGK | N.C. | 22.00 | 22.00 |
| Spare | | | | |
| K2 Regular Cab and C2 Series | ZGK | N.C. | 345.00 | 345.00 |
| C-K3 Series only | ZGK | N.C. | 345.00 | 345.00 |
| LT265/75R16C On Off Road Steel Belted Radial Ply Blackwall
(Maximum Capacity 2470-lbs) | | | | |
| K1 Series only | | | | |
| Front | | | | |
| K1 Regular Cab only | XGL | N.C. | 132.00 | 132.00 |
| K1 Extended Cab only | XGL | N.C. | 76.00 | 76.00 |
| Rear | | | | |
| K1 Regular Cab only | YGL | N.C. | 132.00 | 132.00 |
| K1 Extended Cab only | YGL | N.C. | 76.00 | 76.00 |
| Spare | | | | |
| K1 Regular Cab only | ZGL | N.C. | 66.00 | 66.00 |
| K1 Extended Cab only | ZGL | N.C. | 38.00 | 38.00 |

- (a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
 ◇ State and local taxes not included.

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1988 model motor vehicles

| Description | Option Number | Factory D&H(s) | List Price | Mfr's Suggested Retail Price◇ |
|---|---------------|----------------|------------|-------------------------------|
| LT265/75R16C On Off Road Steel Belted Radial Ply White Outline Lettered
(Maximum Capacity 2470-lbs) | | | | |
| K1 Series only | | | | |
| Front | | | | |
| K1 Regular Cab only | XGM | N.C. | 182.00 | 182.00 |
| K1 Extended Cab only | XGM | N.C. | 126.00 | 126.00 |
| Rear | | | | |
| K1 Regular Cab only | YGM | N.C. | 182.00 | 182.00 |
| K1 Extended Cab only | YGM | N.C. | 126.00 | 126.00 |
| Spare | | | | |
| K1 Regular Cab only | ZGM | N.C. | 91.00 | 91.00 |
| K1 Extended Cab only | ZGM | N.C. | 63.00 | 63.00 |
| Tube-Type | | | | |
| 7.50-16D Nylon Blackwall
(Maximum Capacity each. Front 2440-lbs) (Dual Rear 2140-lbs) | | | | |
| C30 Series with R05 Dual Rear Wheels | | | | |
| Front | XPF | N.C. | (-146.00) | (-146.00) |
| Rear | YPF | N.C. | 274.00 | 274.00 |
| Spare | ZPF | N.C. | 261.00 | 261.00 |

OTHER OPTIONS

| | | | | |
|--|-----|----------------------|--------|--------|
| Air Cleaner, Pre-Cleaner: | K46 | N.A. | 44.00 | 44.00 |
| Air Conditioning: All-Weather. C-K1,2 Series with LB4 4.3 Liter Engine available only when KC4 Engine Oil Cooler is specified. Not available when V10 Cold-Climate Package is specified. Includes extra cooling | | | | |
| | C60 | N.A. | 781.00 | 781.00 |
| Appearance, Deluxe Front: Includes dark argent grille with bright trim and quad halogen headlamps. Included when YE9 is specified | | | | |
| | V22 | N.A. | 145.00 | 145.00 |
| Batteries: 12-Volt. Not available when B3J Diesel Equipment is specified. | | | | |
| Auxiliary 540 Cold Cranking Amps Delco Freedom. Included with Z81 Camper Special without B3J Diesel Equipment | | | | |
| | TP2 | N.A. | 134.00 | 134.00 |
| Heavy-Duty. 830 Cold Cranking Amps Delco Freedom. Included when V10 Cold-Climate Package is specified | | | | |
| | UA1 | N.A. | 56.00 | 56.00 |
| Bumper Equipment: | | | | |
| Bumpers, Chromed. | | | | |
| Front, Deluxe with rub strip. Included with Z62 or YE9. | VG3 | N.A. | 26.00 | 26.00 |
| Rear Step with rub strip. Available only when VG3 Front Bumper is specified | VB3 | N.A. | 229.00 | 229.00 |
| Bumpers, Painted. Rear Step. Not available when B86 Bright Moldings or when YE9 is specified | | | | |
| | V43 | N.A. | 130.00 | 130.00 |
| Guards, Front Bumper, Black. Available only when VG3 Deluxe Front Bumper is specified | | | | |
| | V27 | N.A. | 32.00 | 32.00 |
| Camper Special Chassis Equipment: Basic Camper Group C-K2-3 Series only Includes TP2 Auxiliary Battery without B3J Diesel Equipment. Also includes camper body wiring harness, DF2 Mirrors, F59 Stabilizer and NJ8 Fuel Tank | | | | |
| Without B3J Diesel Equipment | Z81 | N.A. | 376.00 | 376.00 |
| With B3J Diesel Equipment | Z81 | N.A. | 242.00 | 242.00 |
| Carrier, Spare Wheel and Tire: Side Mounted
Available only when spare tire is specified. Not available on K10703 or when R05 Dual Rear Wheels are specified. | | | | |
| | P13 | NO ADDITIONAL CHARGE | | |
| Cold-Climate Package: Not available when C60 Air Conditioning or B3J Diesel Equipment is specified. Includes special insulation, C42 H.D. Heater and Defroster, K05 Engine Block Heater and anti-freeze protection to -32 degrees | | | | |
| Without L19 7.4 Liter Engine. Also includes UA1 H.D. Battery | V10 | N.A. | 134.00 | 134.00 |
| With L19 7.4 Liter Engine | V10 | N.A. | 78.00 | 78.00 |

(a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

◇ State and local taxes not included.

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1988 model motor vehicles

| Description | Option Number | Factory D&H(a) | List Price | Mfr's Suggested Retail Price(1) |
|--|---------------|----------------|------------|---------------------------------|
| OTHER OPTIONS | | | | |
| Console: Available only when bucket seats are specified | D55 | N.A. | 114.00 | 114.00 |
| Cooling Systems: | | | | |
| <i>Engine Oil.</i> Not available when B3J Diesel Equipment is specified. C-K1-2 Series with MX1 or MX0 Automatic Transmission available only when V02 Radiator and Transmission Oil Cooler is specified. C-K3 Series with L19 7.4 Liter or L05 5.7 Liter Engine, available only when V02 Radiator and Transmission Oil Cooler is specified. Included with Z82 Trailering Special | | | | |
| | KC4 | N.A. | 126.00 | 126.00 |
| <i>Radiator, Heavy-Duty.</i> Not available when C60 Air Conditioning or V02 Radiator and Transmission Oil Cooler is specified. | V01 | N.A. | 56.00 | 56.00 |
| <i>Radiator and Transmission Oil, Heavy-Duty.</i> Not available when V01 H.D. Radiator is specified. Available only when MX1 or MX0 Automatic Transmission is specified. Included when Z82 Trailering Special or R05 Dual Rear Wheels are specified | V02 | N.A. | 63.00 | 63.00 |
| Defogger, Rear Window: Electric. Not available when A28 Sliding Rear Window is specified. Available only when YE9 or Z62 is specified. Regular Cab also available only when A01 Tinted Glass is specified | C49 | N.A. | 154.00 | 154.00 |
| Filler Cap, Fuel: Locking | N05 | N.A. | 18.00 | 18.00 |
| Floor Covering: Mats, Color-Keyed | | | | |
| <i>Front Floor, Removable.</i> Available only when YE9 is specified | B32 | N.A. | 16.00 | 16.00 |
| <i>Rear, Extended Cab only.</i> Available only when AM7 Folding Rear Seat and B32 Front Floor Mats are specified | B33 | N.A. | 12.00 | 12.00 |
| Gages: Voltmeter, Temperature and Oil Pressure. | Z53 | N.A. | 42.00 | 42.00 |
| Glass: | | | | |
| <i>Tinted.</i> All Windows. Standard on Extended Cab | A01 | N.A. | 48.00 | 48.00 |
| <i>Deep Tinted with light tinted rear window.</i> Extended Cab only. Not available when AJ1 Deep Tinted Glass is specified. Includes A20 Swing-Out Quarter Windows | AA3 | N.A. | 98.00 | 98.00 |
| <i>Deep Tinted</i> Extended Cab only. Not available when A28 Sliding Rear Windows or C49 Defogger is specified. Includes A20 Swing-Out Quarter Windows | AJ1 | N.A. | 144.00 | 144.00 |
| Harness, Wiring: Trailer, Heavy-Duty, 7-Lead Included with Z82 Trailering Package | UY7 | N.A. | 46.00 | 46.00 |
| Headlamps: Halogen Not available when V22 Deluxe Front Appearance Package is specified | TT4 | N.A. | 24.00 | 24.00 |
| Headliners: Regular Cab only. Not available when Z62 or YE9 is specified. | | | | |
| <i>Vinyl</i> | BB5 | N.C. | 27.00 | 27.00 |
| <i>Custom Package</i> Includes headliner and color-keyed floor covering | VBA | N.A. | 75.00 | 75.00 |
| Heaters: Included when V10 Cold-Climate Package is specified | | | | |
| <i>Engine Block, 600 Watts, 120 Volts.</i> Not available when B3J Diesel Equipment is specified. | K05 | N.A. | 33.00 | 33.00 |
| <i>Heavy Duty, Front</i> Not available when C60 Air Conditioning is specified | C42 | N.A. | 45.00 | 45.00 |
| Lamps: | | | | |
| <i>Cargo.</i> | UF2 | N.A. | 36.00 | 36.00 |
| <i>Dome and Reading</i> Not available with VBA Headliner Package or BB5 Headliner. Included with TR9 Auxiliary Lighting Includes bright lamp bezels | C95 | N.A. | 33.00 | 33.00 |
| <i>Roof Marker</i> Five C-K2,3 Series only. Without R05 Dual Rear Wheels, available only when NA5 Standard or NA6 High Altitude Emission Equipment is specified. Included when R05 Dual Rear Wheels are specified | U01 | N.A. | 52.00 | 52.00 |

- (a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
 ◇ State and local taxes not included.

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1988 model motor vehicles

| Description | Option Number | Factory D&H(a) | List Price | Mfr's Suggested Retail Price ^o |
|--|---------------|----------------|------------|---|
| OTHER OPTIONS | | | | |
| Lighter, Cigarette: Included when YE9 is specified | U37 | N.A. | 25.00 | 25.00 |
| Lighting, Auxiliary. Includes C95 Dome and Reading Lamp | TR9 | N.A. | 102.00 | 102.00 |
| Mirrors, Exterior: LH and RH.
<i>Below-Eye-Line Type.</i> 9" x 6.5". | | | | |
| Painted, Black | D44 | N.A. | 52.00 | 52.00 |
| Stainless Steel | D45 | N.A. | 87.00 | 87.00 |
| Camper Type. Stainless steel, 7.5" x 10.5". Adjustable arm feature to provide field of vision for vehicles to 98" wide. Shipped loose for dealer installation. Included with Z81 Camper Special | DF2 | N.A. | 100.00 | 100.00 |
| Moldings: | | | | |
| Body Side Black. Not available when YE9, R05 Dual Rear Wheels or B85 Bright Body Side Moldings are specified. Included with Z62 | B84 | N.A. | 59.00 | 59.00 |
| Body Side Bright. Not available when B84 Black Body Side Moldings, V43 Bumper or R05 Dual Rear Wheels are specified. Available only when B96 Bright Wheel Opening Moldings and Z62 are specified. Included with YE9 | B85 | N.A. | 17.00 | 17.00 |
| Wheel Opening, Black. Available only when B84 Body Side Black Moldings are specified. Not available when YE9 or R05 Dual Rear Wheels are specified. Also not available on K3 Series. Included with Z62 | B74 | N.A. | 31.00 | 31.00 |
| Wheel Opening, Bright. Available only when B85 Body Side Bright Moldings and Z62 are specified. Not available when R05 Dual Rear Wheels or V43 Deluxe Bumpers are specified. Also not available on K3 Series. Included with YE9 | B96 | N.A. | 31.00 | 31.00 |
| Off-Road Chassis Package: K1 Series only. Available only when GL or GM LT265 Tires are specified. Includes F59 Stabilizer and NZZ Skid Plate | Z71 | N.A. | 310.00 | 310.00 |
| Operating Convenience Package: Includes power door locks and power windows | ZQ2 | N.A. | 344.00 | 344.00 |
| Preliminary Price Information | B3W | N.A. | N.A. | N.A. |
| Radio Equipment: | | | | |
| AM Radio | U83 | N.A. | 122.00 | 122.00 |
| Electronically Tuned AM/FM Stereo Radio with Seek and Scan | UK4 | N.A. | 268.00 | 268.00 |
| Electronically Tuned AM/FM Stereo Radio with Seek and Scan and Digital Clock. Includes premium dual rear speakers | UM7 | N.A. | 333.00 | 333.00 |
| Electronically Tuned AM/FM Stereo Radio with Seek and Scan and Stereo Cassette Tape. | UK5 | N.A. | 390.00 | 390.00 |
| Electronically Tuned AM/FM Stereo Radio with Seek and Scan, Stereo Cassette Tape and Digital Clock. Includes premium dual rear speakers | UM6 | N.A. | 454.00 | 454.00 |
| Electronically Tuned AM Stereo/FM Stereo Radio with Seek and Scan, Stereo Cassette Tape, Graphic Equalizer and Digital Clock. Includes premium dual rear speakers | UX1 | N.A. | 604.00 | 604.00 |
| Fixed Mast Antenna. Included with radio | U73 | N.A. | 41.00 | 41.00 |
| Seat, Folding Rear. Extended Cab only. Available only when bucket or split bench seats are specified | AM7 | N.A. | 385.00 | 385.00 |
| Shock Absorbers: Heavy-Duty. Front and Rear. C-K1 Series only. Not available when Z71 Off Road Package is specified. Included when Z82 Trailing Special is specified | F51 | N.A. | 36.00 | 36.00 |
| Skid Plate: Off road. K1-2-3 Series only. Included with Z71 Off-Road Chassis Package. Includes differential, transfer Case and engine shields | NZZ | N.A. | 95.00 | 95.00 |
| Speed Control, Electronic: | K34 | N.A. | 205.00 | 205.00 |
| Stabilizer Bar: Front. 1" diameter. Included with Z71 Off-Road Chassis Package or Z81 Camper Special | F59 | N.A. | 40.00 | 40.00 |
| Steering Wheels: | | | | |
| Comfortilt. | N33 | N.A. | 121.00 | 121.00 |
| Custom. Included with YE9 | N31 | N.A. | 28.00 | 28.00 |
| Sport. Available only when YE9 is specified | NK3 | N.A. | 7.00 | 7.00 |

- (a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
^o State and local taxes not included.

C-K PICKUP

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1988 model motor vehicles

| Description | Option Number | Factory D&H(s) | List Price | Mfr's Suggested Retail Price |
|---|---------------|----------------------|------------|------------------------------|
| OTHER OPTIONS | | | | |
| Striping: Available only when ZY1 Solid or ZY2 Two-Tone Paint is specified | 085 | N.A. | 89.00 | 89.00 |
| Tank, Fuel: L.H. Frame Mounted. Provides approximately 34-gallon total capacity. Included with Z81 Camper Special. Not available on C-K10703 | NJ8 | N.A. | 56.00 | 56.00 |
| Towing Device: Two front towing hooks | V76 | N.A. | 38.00 | 38.00 |
| Trailer Hitch: Weight Distributing Platform Type. Available only when V43 or V83 Bumper is specified. Included with Z82 H.D. Trailering | VR4 | N.A. | 164.00 | 164.00 |
| Trailering Special: Heavy Duty. Not available on C-K10703. Available only when V43 or V84 Bumper and MX0 or MX1 Automatic Transmission is specified. Includes VR4 Trailer Hitch, UY7 Wiring Harness, V02 Radiator and Transmission Oil Cooler. | | | | |
| Without B3J Diesel Equipment | | | | |
| C-K1 Series only. Also includes F51 Shock Absorbers and KC4 Engine Oil Cooler | Z82 | N.A. | 435.00 | 435.00 |
| C-K2-3 Series only. Also includes KC4 Engine Oil Cooler | Z82 | N.A. | 399.00 | 399.00 |
| With B3J Diesel Equipment | | | | |
| C-K2-3 Series only | Z82 | N.A. | 273.00 | 273.00 |
| Wheel Trim: Bright Metal. | | | | |
| Wheel Covers: Not available when R05 Dual Rear Wheels are specified | P01 | N.A. | 42.00 | 42.00 |
| Trim Rings: C3 Series only. Available only when R05 Dual Rear Wheels are specified | P06 | N.A. | 60.00 | 60.00 |
| Wheels: | | | | |
| Rally: Includes special hub caps and trim rings. | N67 | N.A. | 75.00 | 75.00 |
| Styled: Includes special hub caps. Four wheels only. C-K1 Series only. C1 Series not available when P205/75R15 tires are specified | PA6 | N.A. | 185.00 | 185.00 |
| Aluminum, Cast: Four Wheels only. C1 Series only. Not available when P205/75R15 tires are specified. Includes 15" x 7" wheels and special hub caps. | N80 | N.A. | 295.00 | 295.00 |
| Aluminum, Forged: Four Wheels only. K10703-K10903 only. Includes 16" x 7" wheels and special hub caps | PF4 | N.A. | 295.00 | 295.00 |
| Wheels, Dual Rear: C-3 only. Includes plastic rear fender extensions with side marker lamps located on front and rear sides and dual rear chassis provisions. Not available when G80 Axle is specified. Includes U01 Roof Marker Lamps | | | | |
| Without MX1 Automatic Transmission | R05 | N.A. | 1038.00 | 1038.00 |
| With MX1 Automatic Transmission. Includes V02 H.D. Radiator and Transmission Oil Cooler | R05 | N.A. | 1101.00 | 1101.00 |
| Wheels, Single Rear: Not available when R05 Dual Rear Wheels are specified | R04 | NO ADDITIONAL CHARGE | | |
| Windows: | | | | |
| Sliding Rear: Not available when AJ1 Deep Tinted Glass is specified | A28 | N.A. | 113.00 | 113.00 |
| Swing: Out Rear Quarter: Extended Cab only. Included with AJ1 or AA3 Deep Tinted Glass | A20 | N.A. | 43.00 | 43.00 |
| Windshield Wiper System: Intermittent | CD4 | N.A. | 59.00 | 59.00 |

- (a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
 ◇ State and local taxes not included.

C/K PICKUP

CAB & BODY FEATURES

CAB CONSTRUCTION

CAB DIMENSIONS


COLOR & TRIM CHARTS

TWO-TONES

C/K PICKUP


CHEYENNE/SIERRA SL FEATURES—STANDARD MODEL

The Cheyenne/Sierra SL standard models include the following items as standard equipment

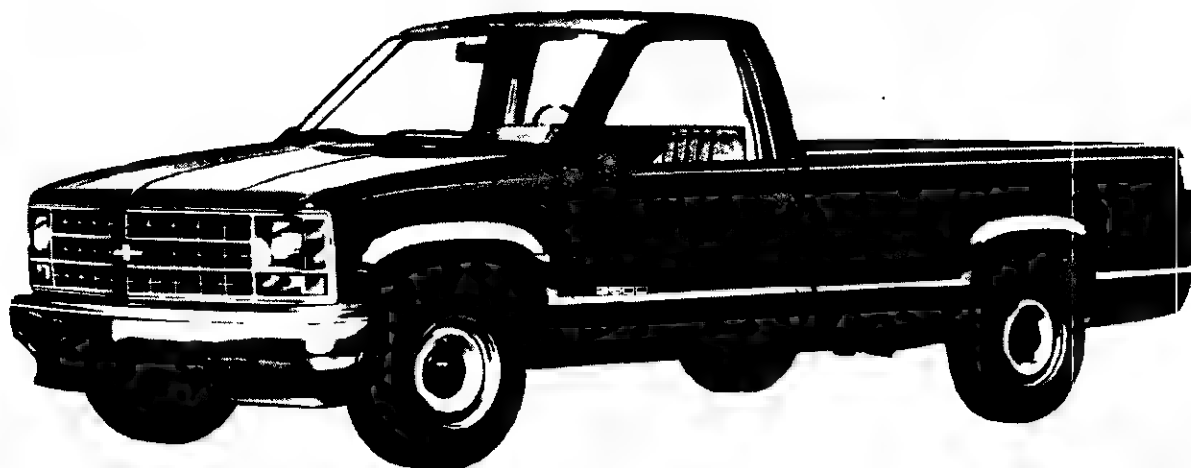

EXTERIOR

- **Bumper:** Front; chromed
- **Color:** See Interior and Exterior Color Selection Chart
- **Grille:** Molded plastic; painted light argent with dark argent air intake areas; Chevrolet emblem/GMC letters at center of grille
- **Horn:** Single, electric, low note
- **Hub Caps:** Bright metal with black trim (single rear wheel models only)
- **Keys:** Two-key system; with separate keys for ignition switch and door locks
- **Lettering, "Chevrolet/GMC" Tailgate:** Decal with outlined block letters
- **Lights:**
 - Backup lamps: Two rear (integral with tail lamps)
 - Combination parking/direction/hazard: Two front
 - Combination tail/stop/direction/hazard: Two rear
 - Headlamps: Two, rectangular
 - License plate lamp: Single rear
 - Side marker lamps with reflectors: Two front; two rear (integral with tail lamps)
- **Mirrors:** RH and LH fixed arm with adjustable heads; black finish
- **Moldings:** Wheel opening flare moldings (K3500 models only); black with solid color paint, painted lower body color with two-tones
- **Nameplates:** Bright "Cheyenne/Sierra SL" nameplates on upper rear side quarter panel. Series designation nameplates on doors; for 4 wheel drive models, 4x4 decals coordinated with exterior body color at rear of pickup box side panels (located on extension fenders on models with dual rear wheels)
- **Pickup Box:** All-steel double sidewall and tailgate construction; painted body color
- **Spare Tire Carrier:** Winch type mounted under frame at rear
- **Tools:** Mechanical jack and wheel wrench
- **Wheels:** Painted silver with black hub ornament
- **Windshield Wipers and Washers:** Electric, 2-speed wipers with black finish on exposed metal portions; demand-type washer system with fluidic nozzles

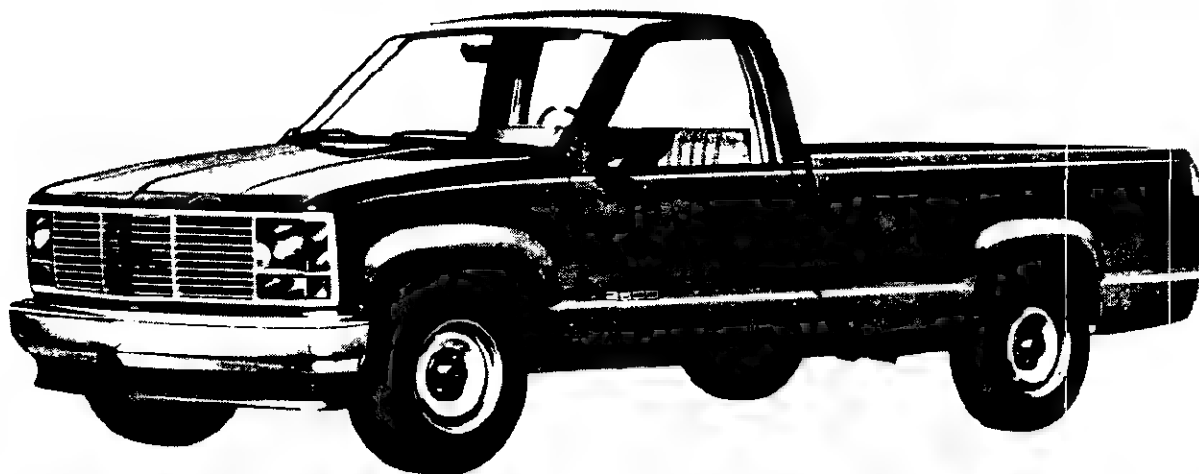

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

C/K PICKUP

CHEYENNE/SIERRA SL FEATURES—STANDARD MODEL

The Cheyenne/Sierra SL standard models include the following items as standard equipment

INTERIOR

- **Armrests:** RH and LH, integral with door trim panels
- **Ashtray:** In middle of instrument panel
- **Coat Hooks:** RH (all models) and LH (Extended Cab models)
- **Colors:**
Painted areas: Same as exterior primary color choice
Interior trim: Coordinated with seat trim color choice
- **Door Sill Plates:** Door-opening protection and floor mat retention; full-length; dark gray plastic
- **Door Trim Panels:** Color-keyed, grained molded plastic with integral armrests
- **Dome Lamp:** LH door-operated switch
- **Floor Covering:** Embossed black rubber mats with insulator
- **Glass:** Tinted, all windows (Extended Cabs only)
- **Headliner:** Full length color-keyed cloth with insulation backing, includes matching retainer moldings (Extended Cabs only).
- **Heater and Defogger:** Deluxe-air, with side window defogger
- **Hood Lock Release:** Handle located on LH side under instrument panel
- **Instrument Cluster Bezel:** Black crackle finish with bright trim
- **Instruments:**
Gages: Speedometer, odometer and fuel
Switches: Main, for control of exterior lights, instrument cluster lights, and cab interior lights; multi-function switch on steering column for direction signals by moving lever up or down (includes lane-change position), headlamp beams by pulling lever toward driver, windshield wiper by turning band marked "WIPER" toward or away from driver, and windshield washer by pushing in the lever knob; ignition with key-in warning buzzer; hazard warning, heater fan
Warning lights: Generator, oil pressure, engine temperature, seat belt, service-parking brake, direction/hazard signal, and high beam
- **Instrument Panel Pad:** Color-keyed, energy-absorbing foam type with grained vinyl skin
- **Insulation and Sound Deadening Material:** Dash (firewall), under front floor mat, under rear floor mat on Extended Cabs, on Extended Cab rear quarter and cab back panels
- **Lights:** Instrument cluster and cab interior lights
- **Mirror, Rearview:** 10" prismatic with soft vinyl trim
- **Seats:** Regular Cabs—Full width, full depth foam bench-type with embossed, grained, all-vinyl trim and folding backrest. Also available at extra cost: Base cloth bench seat with folding backrest.
Extended Cabs—Full width, full depth foam bench-type with embossed, grained, all-vinyl trim and folding backrest. Also available at extra cost: 1) vinyl split front bench seats with folding backrests and RH easy-entry feature (requires folding rear bench seat); 2) vinyl folding rear bench seat (requires split front bench seat). See Interior and Exterior Color Selection Chart for color and trim availability.
- **Seat Belts:** Front (all models): non-detachable combination lap and shoulder belts for outboard positions with emergency-locking retractors and switch in driver's lap belt retractor for buzzer warning system (RH belt is equipped with child seat restraint feature); lap belt with manual adjustment for center position. Rear (Extended Cabs only): lap belts with emergency-locking retractors for all positions. All seat belts are color-keyed with pushbutton type buckles
- **Steering Wheel and Column:** Black, soft plastic wheel with 4 spokes; black energy-absorbing steering column with anti-theft locking feature
- **Stowage Box:** In RH side of instrument panel; door has bright turn-type latch release and beverage holder on inside of door
- **Sunshades:** RH and LH padded; color-keyed
- **Trim Panels:** Cab rear side panels and cab rear upper and lower panels (Extended Cabs only)

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

C/K PICKUP

SCOTTSDALE/SIERRA SLX MODEL OPTION—RPO Z62 (FOR ALL MODELS)

This option includes all Cheyenne/Sierra SL standard model items plus the additions or substitutions listed below



GMC model shown (Chevrolet model available)

EXTERIOR

- **Bright Appearance Items:**
"Scottsdale/Sierra SLX" nameplates on upper rear side quarter panel
- **Bumper Rub Strips:** Black
- **Moldings:** Black plastic body side moldings. Black wheel opening flare moldings (except K3500 models) (Fleetside/Wide-side models with single rear wheels only)

INTERIOR

- **Coat Hooks:** Additional coat hook on LH side
- **Door Sill Plates:** Color-keyed
- **Door Trim Panels:** Color-keyed grained molded plastic, with soft vinyl trim, map pocket, integral armrests and Scottsdale/Sierra SLX emblems
- **Floor Covering:** Color-keyed rubber mats
- **Headliner:** Full-length color-keyed cloth with insulation backing; includes matching retainer moldings (Regular cabs only)
- **Pillar Trim Panels:** Color-keyed molded plastic on door pillars and roof side
- **Seats:**
Regular Cabs—Standard cloth bench seat. Also available at extra cost: 1) Custom vinyl bench seat and 2) Custom vinyl bucket seats
Extended Cabs—Custom vinyl bench seat. Also available at extra cost: 1) Custom vinyl split front bench seat with RH easy-entry feature; 2) Custom vinyl front bucket seats with RH easy-entry feature; 3) Custom vinyl rear folding bench seat
See Interior and Exterior Color Selection Chart for color and trim availability.
- **Storage Tray:** Full width on floor behind seat
- **Trim Panels:** (Regular Cab only) Cab rear side panels and cab rear upper and lower panels

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

C/K PICKUP

SILVERADO/SIERRA SLE MODEL OPTION—RPO YE9

This option includes all items in the Scottsdale/Sierra SLX model option plus the additions or substitutions listed below



Chevrolet model shown (GMC model available)

EXTERIOR

- **Bright Appearance Items:**
 - "Silverado/Sierra SLE" nameplates on upper rear side quarter panels
 - Chrome-trimmed grille
 - "Chevrolet/GMC" letters nameplate on tailgate applique panel (Fleetside/Wideside only)
 - Bright applique panel fitted over central area of tailgate (Fleetside/Wideside only)
 - Wheel-opening lip moldings (except K3 models) (Fleetside/Wideside models with single rear wheels only)
- **Bumper Rub Strips:** Black with bright trim
- **Cab-to-Fender Insulators:** Gasoline models only
- **Hood Insulator**
- **Horn:** Additional, electric, high note
- **Moldings:** Black body side with bright trim
- **Special Headlamps:** Halogen, rectangular; dual RH and LH

INTERIOR

- **Cab-to-Fender Insulators**
- **Cigarette Lighter:** In ashtray
- **Cowl Panel Trim:** Color-keyed carpet on cowl side panels with insulator
- **Door Trim Panels:** Two-tone soft vinyl over plastic with integral armrests, map pocket, door closing assist straps, and Silverado/SLE emblems
- **Floor Covering:** Color-keyed carpeting and sill plates
- **Hood Insulator**
- **Insulation:** On cab back panel
- **Seats:**
 - Regular Cabs—Choice of Custom Vinyl or Custom Cloth bench seat. Also available at extra cost: Custom vinyl or custom cloth front bucket seats
 - Extended Cabs—Choice of Custom Vinyl or Custom Cloth split front bench seat with RH easy-entry feature. Also available at extra cost: 1) Custom vinyl or custom cloth front bucket seats with RH easy-entry feature; and 2) Matching Custom Vinyl or Custom Cloth rear folding bench seat.
- See Interior and Exterior Color Selection Chart for color and trim availability
- **Steering Wheel:** Custom 4-spoke
- **Sunshades:** RH & LH cloth covered with storage strap on LH unit
- **Trim Panels:** Color-keyed carpet on cab back panel
- **Visor Mirror:** On RH sun visor

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

C/K REGULAR CAB PICKUP

INTERIOR AND EXTERIOR COLOR AVAILABILITY CHART

WITH ZY1 AND ZY2 PAINT

PLEASE NOTE: Below are the interior trim color and exterior paint combinations recommended by Chevrolet/GMC. They are the only available interior and exterior combinations allowed.

| TRIM LEVEL | | INTERIOR COLORS | | | | | | | | | | |
|---|-------|-----------------|-----------------|---|------|--------|------------|-------------|-----------------|------|--------|-----------|
| Seat Type | Decor | Beige | Blue | Garnet | Gray | Saddle | | | | | | |
| CHEYENNE/SIERRA SL
Vinyl Bench Seat | STD | VUU1 | VDD1 | VRR1 | VQQ1 | VSS1 | | | | | | |
| Cloth Bench Seat | | CUU1 | CDD1 | CRR1 | CQQ1 | CSS1 | | | | | | |
| SCOTTSDALE/SIERRA SLE
Cloth Bench Seat | Z62 | CUU1 | CDD1 | CRR1 | CQQ1 | CSS1 | | | | | | |
| Custom Vinyl Bench Seat | | XUU1 | XDD1 | XRR1 | XQQ1 | XSS1 | | | | | | |
| Custom Vinyl Bucket Seat | | XDD2 | XRR2 | | | XSS2 | | | | | | |
| SILVERADO/SIERRA SLX
Custom Cloth Bench Seat | YE9 | LUU1 | LDD1 | LRR1 | LQQ1 | LSS1 | | | | | | |
| Custom Vinyl Bench Seat | | XUU1 | XDD1 | XRR1 | XQQ1 | XSS1 | | | | | | |
| Custom Cloth Bucket Seat | | | LDD2 | LRR2 | LQQ2 | LSS2 | | | | | | |
| Custom Vinyl Bucket Seat | | | XDD2 | XRR2 | | XSS2 | | | | | | |
| EXTERIOR COLORS
W/ZY1 & ZY2 PAINT | | Color
Code 1 | Color
Code 2 | INTERIOR & EXTERIOR COMBINATIONS SHOWN
ARE THE ONLY COMBINATIONS AVAILABLE | | | DK
BLUE | DK
BROWN | COPPER
BEIGE | GOLD | SILVER | VERMILION |
| BLACK, SABLE (METALLIC) | 18 | 18 | | X | | X | | | | X | | |
| BLACK, SABLE (METALLIC) | 18 | 18 | | | | X | | | | X | | |
| BLACK, SABLE (METALLIC) | 18 | 18 | | | X | | | | | | | X |
| BLACK, SABLE (METALLIC) | 18 | 18 | X | | | | | | X | | | |
| Gold, Adobe (Metallic) | 18 | 52 | | | | | | | X | | | |
| Quicksilver, (Metallic) | 18 | 96 | | | | X | | | | | X | |
| Red, Flame* | 18 | 70 | | | X | | | | | | | X |
| BLUE, ICED (METALLIC) | 22 | 22 | | X | | X | | | | | X | |
| Blue, Pacific (Metallic) | 22 | 30 | | X | | X | | | | | X | |
| Quicksilver, (Metallic) | 22 | 96 | | X | | X | | | | | X | |
| White, Summit | 22 | 50 | | X | | X | | | | | X | |
| BLUE, PACIFIC (METALLIC) | 30 | 30 | | X | | X | | | | | | X |
| BLUE, PACIFIC (METALLIC) | 30 | 30 | | | | X | | | | X | | |
| Blue, Iced (Metallic)* | 30 | 22 | | X | | X | | | | | X | |
| Quicksilver, (Metallic) | 30 | 96 | | X | | X | | | | | X | |
| White, Summit* | 30 | 50 | | X | | | | | X | | | |
| White, Summit* | 30 | 50 | | | | X | | | X | | | |
| BRANDYWINE (METALLIC) | 95 | 95 | | | | X | | | | X | | |
| BRANDYWINE (METALLIC) | 95 | 95 | | | X | | | | | | | X |
| Black, Sable (Metallic) | 95 | 18 | | | X | | | | | | X | |
| Quicksilver, (Metallic) | 95 | 96 | | | X | | | | | | | X |
| White, Summit* | 95 | 50 | | | X | | | | | | | X |
| BROWN, SPICE (METALLIC) | 32 | 32 | X | | | | | | | X | | |
| Gold, Adobe (Metallic) | 32 | 52 | X | | | | | | | X | | |
| Sandstone, (Metallic) | 32 | 58 | X | | | | | | X | | | |
| GOLD, ADOBE (METALLIC) | 52 | 52 | X | | | | | | | X | | |
| Black, Sable (Metallic) | 52 | 18 | | | | X | | | X | | | |
| Brown, Spice (Metallic) | 52 | 32 | X | | | | | | X | | | |
| QUICKSILVER, (METALLIC) | 96 | 96 | | X | X | X | | | | | | X |
| Black, Sable (Metallic) | 96 | 18 | | | | X | | | | | | X |
| Blue, Pacific (Metallic) | 96 | 30 | | X | | | X | | | | | |
| Blue, Iced (Metallic)* | 96 | 22 | | X | | | X | | | | | |
| Brandywine, (Metallic) | 96 | 95 | | | X | | | | | | | X |
| Red, Flame* | 96 | 70 | | | X | | | | | | | X |
| RED, FLAME | 70 | 70 | | | X | | | | | | | X |
| Black, Sable (Metallic) | 70 | 18 | | | X | | | | | | | X |
| Black, Sable (Metallic) | 70 | 18 | | | | X | | | | X | | |
| Quicksilver (Metallic) | 70 | 96 | | | | X | | | | X | | |
| Quicksilver (Metallic) | 70 | 96 | | | X | | | | | | | X |
| White, Summit* | 70 | 50 | | | X | | | | | | | X |
| White, Summit* | 70 | 50 | | | | X | | | | X | | |
| SANDSTONE (METALLIC) | 58 | 58 | | | | X | | | | | | |
| SANDSTONE (METALLIC) | 58 | 58 | X | | | | | | X | | | |
| Black, Sable (Metallic) | 58 | 18 | X | | | | | | X | | | |
| Brown, Spice (Metallic) | 58 | 32 | X | | | | X | | X | | | |
| WHITE SUMMIT | 50 | 50 | | X | | | | | | | | |
| WHITE, SUMMIT | 50 | 50 | X | | | | X | | | X | | |
| WHITE, SUMMIT | 50 | 50 | | | X | | | | | | | X |
| Blue, Pacific (Metallic) | 50 | 30 | | X | | | X | | | | | |
| Blue, Iced (Metallic)* | 50 | 22 | | X | | | X | | | | | |
| Brandywine, (Metallic) | 50 | 95 | | | X | | | | | | | X |
| Brown, Spice (Metallic) | 50 | 32 | | | | | X | | | X | | |
| Quicksilver, (Metallic) | 50 | 96 | | | X | | | | | | | X |
| Red, Flame* | 50 | 70 | | | X | | | | | | | X |

* N/A K3500 models

PRELIMINARY INFORMATION — SUBJECT TO CHANGE
General Motors Corporation

January, 1987

C/K EXTENDED CAB PICKUP

INTERIOR AND EXTERIOR COLOR AVAILABILITY CHART

WITH ZY1 AND ZY2 PAINT

PLEASE NOTE: Below are the interior trim color and exterior paint combinations recommended by Chevrolet/GMC. They are the only available interior and exterior combinations allowed.

| TRIM LEVEL | | INTERIOR COLORS | | | | D85 STRIPING CHART
RECOMMENDED COMBINATIONS
STRIPE COLORS | | | | | |
|--------------------------------------|-----------------|-----------------|---|--------|--------|---|-------------|-----------------|------|--------|------------|
| Seat Type | | Decor | Blue | Garnet | Saddle | | | | | | |
| CHEYENNE/SIERRA SL | | STD | | | | | | | | | |
| Vinyl Bench Seat | | | VDD1 | VRR1 | VSS1 | | | | | | |
| #Vinyl Split Bench Seat | | | VDD3 | VRR3 | VSS3 | | | | | | |
| SCOTTSDALE/SIERRA SLE | | Z62 | | | | | | | | | |
| Custom Vinyl Bench Seat | | | XDD1 | XRR1 | XSS1 | | | | | | |
| #Custom Vinyl Split Bench Seat | | | XDD3 | XRR3 | XSS3 | | | | | | |
| #Custom Vinyl Bucket Seat | | | XDD2 | XRR2 | XSS2 | | | | | | |
| SILVERADO/SIERRA SLX | | YE9 | | | | | | | | | |
| #Custom Cloth Split Bench Seat | | | LDD3 | LRR3 | LSS3 | | | | | | |
| #Custom Vinyl Split Bench Seat | | | XDD3 | XRR3 | XSS3 | | | | | | |
| #Custom Cloth Bucket Seat | | | LDD2 | LRR2 | LSS2 | | | | | | |
| #Custom Vinyl Bucket Seat | | | XDD2 | XRR2 | XSS2 | | | | | | |
| EXTERIOR COLORS
w/ZY1 & ZY2 PAINT | Color
Code 1 | Color
Code 2 | INTERIOR & EXTERIOR COMBINATIONS SHOWN
ARE THE ONLY COMBINATIONS AVAILABLE | | | DK
BLUE | DK
BROWN | COPPER
BEIGE | GOLD | SILVER | VERMILLION |
| BLACK, SABLE (METALLIC) | 18 | 18 | X | | | | | | | X | |
| BLACK, SABLE (METALLIC) | 18 | 18 | | | X | | | | X | | |
| BLACK, SABLE (METALLIC) | 18 | 18 | | X | | | | | | | X |
| Gold, Adobe (Metallic) | 18 | 52 | | | X | | | | X | | |
| Red, Flame★ | 18 | 70 | | X | | | | | | | X |
| BLUE, ICED (METALLIC) | 22 | 22 | X | | | | | | | X | |
| Blue, Pacific (Metallic) | 22 | 30 | X | | | | | | | X | |
| Quicksilver, (Metallic) | 22 | 96 | X | | | | | | | X | |
| White, Summit★ | 22 | 50 | X | | | | | | | X | |
| BLUE, PACIFIC (METALLIC) | 30 | 30 | X | | | | | | | | X |
| BLUE, PACIFIC (METALLIC) | 30 | 30 | | | X | | | | X | | |
| Blue, Iced (Metallic)★ | 30 | 22 | X | | | | | | | X | |
| Quicksilver, (Metallic) | 30 | 96 | X | | | | | | | X | |
| White, Summit★ | 30 | 50 | X | | | | | | | X | |
| White, Summit★ | 30 | 50 | | | X | | | | X | | |
| BRANDYWINE (METALLIC) | 95 | 95 | | | X | | | | X | | |
| BRANDYWINE (METALLIC) | 95 | 95 | | X | | | | | | | X |
| Black, Sable (Metallic) | 95 | 18 | | X | | | | | | X | |
| Quicksilver, (Metallic) | 95 | 96 | | X | | | | | | X | |
| White, Summit★ | 95 | 50 | | X | | | | | | X | |
| BROWN, SPICE (METALLIC) | 32 | 32 | | | X | | | | X | | |
| Gold, Adobe (Metallic) | 32 | 52 | | | X | | | | X | | |
| GOLD, ADOBE (METALLIC) | 52 | 52 | | | X | | | X | | | |
| Black, Sable (Metallic) | 52 | 18 | | | X | | | X | | | |
| QUICKSILVER, (METALLIC) | 96 | 96 | X | X | | | | | | | X |
| Blue, Pacific (Metallic) | 96 | 30 | X | | | X | | | | | |
| Blue, Iced (Metallic)★ | 96 | 22 | X | | | X | | | | | X |
| Brandywine, (Metallic) | 96 | 95 | | X | | | | | | | X |
| Red, Flame★ | 96 | 70 | | X | | | | | | | X |
| RED, FLAME | 70 | 70 | | X | X | | | | | | X |
| Black, Sable (Metallic) | 70 | 18 | | X | | | | | X | | |
| Black, Sable (Metallic) | 70 | 18 | | | X | | | | X | | |
| Quicksilver, (Metallic) | 70 | 96 | | | X | | | | X | | |
| Quicksilver, (Metallic) | 70 | 96 | | X | | | | | | | X |
| White, Summit★ | 70 | 50 | | X | | | | | | | X |
| White, Summit★ | 70 | 50 | | | X | | | | X | | |
| SANDSTONE (METALLIC) | 58 | 58 | | | X | | X | X | | | |
| Brown, Spice (Metallic) | 58 | 32 | | | X | | | | | | |
| WHITE, SUMMIT | 50 | 50 | X | | | X | | | | | |
| WHITE, SUMMIT | 50 | 50 | | | X | | | | X | | |
| WHITE, SUMMIT | 50 | 50 | | X | | | | | | | X |
| Blue, Pacific (Metallic) | 50 | 30 | X | | | X | | | | | |
| Blue, Iced (Metallic)★ | 50 | 22 | X | | | X | | | | | X |
| Brandywine, (Metallic) | 50 | 95 | | X | | | | | X | | |
| Brown, Spice (Metallic) | 50 | 32 | | | X | | | | | | X |
| Quicksilver (Metallic) | 50 | 96 | | X | | | | | | | X |
| Red, Flame★ | 50 | 70 | | X | | | | | | | X |

★ N/A K3500 models

#Requires AM7 Folding Rear Seat

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

C/K REGULAR CAB PICKUP
INTERIOR AND EXTERIOR COLOR AVAILABILITY CHART
C/K1500-2500 AND C3500 MODELS ONLY
WITH ZY3 AND ZY4 PAINT

PLEASE NOTE: Below are the interior trim color and exterior paint combinations recommended by Chevrolet/GMC. They are the only available interior and exterior combinations allowed.

| TRIM LEVEL | | Decor | INTERIOR COLORS | | | | | |
|--|----|-----------------|-----------------|---|--------------|--------------|--------------|----------------------|
| Seat Type | | | Beige | Blue | Garnet | Gray | Saddle | |
| CHEYENNE/SIERRA SL
Vinyl Bench Seat
Cloth Bench Seat | | STD | VUU1
CUU1 | VDD1
CDD1 | VRR1
CRR1 | VQQ1
CQQ1 | VSS1
CSS1 | |
| SCOTTSDALE/SIERRA SLX
Cloth Bench Seat
Custom Vinyl Bench Seat
Custom Vinyl Bucket Seat | | | Z62 | CUU1
XUU1 | CDD1
XDD1 | CRR1
XRR1 | COQ1
XQQ1 | CSS1
XSS1 |
| | | | | | XDD2 | XRR2 | | XSS2 |
| SILVERADO/SIERRA SLE
Custom Cloth Bench Seat
Custom Vinyl Bench Seat
Custom Cloth Bucket Seat
Custom Vinyl Bucket Seat | | YE9 | | LUU1
XUU1 | LDD1
XDD1 | LRR1
XRR1 | LQQ1
XQQ1 | LSS1
XSS1 |
| | | | | LDD2 | LRR2 | LQQ2 | LSS2 | |
| | | | | XDD2 | XRR2 | | XSS2 | |
| EXTERIOR COLORS
w/ZY3, & ZY4 PAINT | | Color
Code 1 | Color
Code 2 | INTERIOR & EXTERIOR COMBINATIONS SHOWN
ARE THE ONLY COMBINATIONS AVAILABLE | | | | STRIPE COLOR |
| BLACK, SABLE (Metallic)/
Gold, Adobe (Metallic) | 18 | 52 | | | | | X | Gold/Black |
| BLACK, SABLE (Metallic)/
Red, Flame | 18 | 70 | | | X | | | Vermillion/Dark Red |
| BLACK, SABLE (Metallic)/Quicksilver | 18 | 96 | | | | X | | Vermillion/Silver |
| BLUE, ICED (Metallic)/
Blue, Pacific (Metallic) | 22 | 30 | | X | | X | | Light Blue/Dark Blue |
| BLUE, ICED (Metallic)/
Quicksilver (Metallic) | 22 | 96 | | X | | X | | Light Blue/Dark Blue |
| BLUE, ICED (Metallic)/
White, Summit | 22 | 50 | | X | | X | | Light Blue/Dark Blue |
| BLUE, PACIFIC (Metallic)/
Blue, Iced (Metallic) | 30 | 22 | | X | | X | | Light Blue/Dark Blue |
| BLUE, PACIFIC (Metallic)/
Quicksilver, (Metallic) | 30 | 96 | | X | | X | | Vermillion/Silver |
| BLUE, PACIFIC (Metallic)/
White, Summit | 30 | 50 | | X | | | | Light Blue/Dark Blue |
| BLUE, PACIFIC (Metallic)/
White, Summit | 30 | 50 | | | | | X | Gold/Black |
| BRANDYWINE/Black, Sable (Metallic) | 95 | 18 | | | X | | | Vermillion/Dark Red |
| BRANDYWINE/Quicksilver (Metallic) | 95 | 96 | X | | X | | | Vermillion/Silver |
| BRANDYWINE/White, Summit | 95 | 50 | | | X | | | Vermillion/Dark Red |
| BROWN, SPICE (Metallic)/
Gold, Adobe (Metallic) | 32 | 52 | X | | | | X | Doeskin/Carmine |
| BROWN, SPICE (Metallic)/
Sandstone (Metallic) | 32 | 58 | X | | | | | Doeskin/Carmine |
| GOLD, ADOBE (Metallic)/
Black, Sable (Metallic) | 52 | 18 | | | | | X | Doeskin/Carmine |
| GOLD, ADOBE (Metallic)/
Brown, Spice (Metallic) | 52 | 32 | X | | | | X | Doeskin/Carmine |
| QUICKSILVER (Metallic)/
Black, Sable (Metallic) | 96 | 18 | | | | X | | Vermillion/Silver |
| QUICKSILVER (Metallic)/
Blue, Pacific (Metallic) | 96 | 30 | | X | | | | Light Blue/Dark Blue |
| QUICKSILVER (Metallic)/
Blue, Iced (Metallic) | 96 | 22 | | X | | | | Light Blue/Dark Blue |
| QUICKSILVER (Metallic)/
Brandywine (Metallic) | 96 | 95 | | | X | | | Vermillion/Silver |
| QUICKSILVER (Metallic)/
Red, Flame | 96 | 70 | | | X | | | Vermillion/Silver |
| RED, FLAME/Black, Sable | 70 | 18 | | | | | X | Gold/Black |
| RED, FLAME/Black, Sable | 70 | 18 | | | X | | | Vermillion/Dark Red |
| RED, FLAME/Quicksilver (Metallic) | 70 | 96 | | | X | | | Vermillion/Dark Red |
| RED, FLAME/Quicksilver (Metallic) | 70 | 96 | | | | | X | Vermillion/Silver |
| RED, FLAME/White, Summit | 70 | 50 | | | X | | | Vermillion/Dark Red |
| RED, FLAME/White, Summit | 70 | 50 | | | | | X | Gold/Black |
| SANDSTONE (Metallic)/
Black, Sable (Metallic) | 58 | 18 | X | | | | | Doeskin/Carmine |
| SANDSTONE (Metallic)/
Brown, Spice (Metallic) | 58 | 32 | X | | | | X | Doeskin/Carmine |
| WHITE, SUMMIT/Blue Pacific (Metallic) | 50 | 30 | | X | | | | Light Blue/Dark Blue |
| WHITE, SUMMIT/Blue, Iced (Metallic) | 50 | 22 | | X | | | | Light Blue/Dark Blue |
| WHITE, SUMMIT/Brown Spice (Metallic) | 50 | 32 | | | | | X | Doeskin/Carmine |
| WHITE, SUMMIT/Brandywine (Metallic) | 50 | 95 | | | X | | | Vermillion/Dark Red |
| WHITE, SUMMIT/Red, Flame | 50 | 70 | | | X | | | Vermillion/Silver |
| WHITE, SUMMIT/Quicksilver (Metallic) | 50 | 96 | | | X | | | Vermillion/Silver |

PRELIMINARY INFORMATION — SUBJECT TO CHANGE

C/K EXTENDED CAB PICKUP
INTERIOR AND EXTERIOR COLOR AVAILABILITY CHART
C/K1500-2500 AND C3500 MODELS ONLY
WITH ZY3 AND ZY4 PAINT

PLEASE NOTE: Below are the interior trim color and exterior paint combinations recommended by Chevrolet/GMC. They are the only available interior and exterior combinations allowed.

| TRIM LEVEL | | Decor | INTERIOR COLORS | | | |
|---|-----------------|-----------------|---|--------|--------|----------------------|
| Seat Type | | | Blue | Garret | Saddle | |
| CHEYENNE/SIERRA SL | | STD | VDD1 | VRR1 | VSS1 | |
| Vinyl Bench Seat | | | VDD3 | VRR3 | VSS3 | |
| #Vinyl Split Bench Seat | | | | | | |
| SCOTSDALE/SIERRA SLX | | Z62 | XDD1 | XRR1 | XSS1 | |
| Custom Vinyl Bench Seat | | | XDD3 | XRR3 | XSS3 | |
| #Custom Vinyl Split Bench Seat | | | XDD2 | XRR2 | XSS2 | |
| #Custom Vinyl Bucket Seat | | | | | | |
| SILVERADO/SIERRA SLE | | YE9 | LDD3 | LRR3 | LSS3 | |
| #Custom Cloth Split Bench Seat | | | XDD3 | XRR3 | XSS3 | |
| #Custom Vinyl Split Bench Seat | | | LDD2 | LRR2 | LSS2 | |
| #Custom Cloth Bucket Seat | | | XDD2 | XRR2 | XSS2 | |
| #Custom Vinyl Bucket Seat | | | | | | |
| EXTERIOR COLORS
w/ZY3, & ZY4 PAINT | Color
Code 1 | Color
Code 2 | INTERIOR & EXTERIOR COMBINATIONS SHOWN
ARE THE ONLY COMBINATIONS AVAILABLE | | | STRIPE COLOR |
| BLACK, SABLE (Metallic)/
Gold, Adobe (Metallic) | 18 | 52 | | | X | Gold/Black |
| BLACK, SABLE (Metallic)/
Red, Flame | 18 | 70 | | X | | Vermillion/Dark Red |
| BLUE, ICED (Metallic)/
Blue, Pacific (Metallic) | 22 | 30 | X | | X | Light Blue/Dark Blue |
| BLUE, ICED (Metallic)/
Quicksilver (Metallic) | 22 | 96 | X | | | Light Blue/Dark Blue |
| BLUE, ICED (Metallic)/
White, Summit | 22 | 50 | X | | | Light Blue/Dark Blue |
| BLUE, PACIFIC (Metallic)/
Blue, Iced (Metallic) | 30 | 22 | X | | | Light Blue/Dark Blue |
| BLUE, PACIFIC (Metallic)/
Quicksilver (Metallic) | 30 | 96 | X | | | Vermillion/Silver |
| BLUE, PACIFIC (Metallic)/
White, Summit | 30 | 50 | X | | | Light Blue/Dark Blue |
| BLUE, PACIFIC (Metallic)/
White, Summit | 30 | 50 | | | X | Gold/Black |
| BRANDYWINE/Black, Sable (Metallic) | 95 | 18 | | X | | Vermillion/Dark Red |
| BRANDYWINE/Quicksilver (Metallic) | 95 | 96 | | X | | Vermillion/Silver |
| BRANDYWINE/White, Summit | 95 | 50 | | X | | Vermillion/Dark Red |
| BROWN, SPICE (Metallic)/
Gold, Adobe (Metallic) | 32 | 52 | | | X | Doeskin/Carmine |
| GOLD, ADOBE (Metallic)/
Black, Sable (Metallic) | 52 | 18 | | | X | Doeskin/Carmine |
| GOLD, ADOBE (Metallic)/
Brown, Spice (Metallic) | 52 | 32 | | | X | Doeskin/Carmine |
| QUICKSILVER (Metallic)/
Blue, Pacific (Metallic) | 96 | 30 | X | | | Light Blue/Dark Blue |
| QUICKSILVER (Metallic)/
Blue, Iced (Metallic) | 96 | 22 | X | | | Light Blue/Dark Blue |
| QUICKSILVER (Metallic)/
Brandywine (Metallic) | 96 | 95 | | X | | Vermillion/Silver |
| QUICKSILVER (Metallic)/
Red, Flame | 96 | 70 | | X | | Vermillion/Silver |
| RED, FLAME/Black, Sable | 70 | 18 | | | X | Gold/Black |
| RED, FLAME/Black, Sable | 70 | 18 | | X | | Vermillion/Dark Red |
| RED, FLAME/Quicksilver (Metallic) | 70 | 96 | | X | | Vermillion/Dark Red |
| RED, FLAME/Quicksilver (Metallic) | 70 | 96 | | | X | Vermillion/Silver |
| RED, FLAME/White, Summit | 70 | 50 | | X | | Vermillion/Dark Red |
| RED, FLAME/White, Summit | 70 | 50 | | | X | Gold/Black |
| SANDSTONE (Metallic)/
Brown, Spice (Metallic) | 58 | 32 | | | X | Doeskin/Carmine |
| WHITE, SUMMIT/Blue Pacific (Metallic) | 50 | 30 | X | | | Light Blue/Dark Blue |
| WHITE, SUMMIT/Blue, Iced (Metallic) | 50 | 22 | X | | | Light Blue/Dark Blue |
| WHITE, SUMMIT/Brown, Spice (Metallic) | 50 | 32 | | | X | Doeskin/Carmine |
| WHITE, SUMMIT/Brandywine (Metallic) | 50 | 95 | | X | | Vermillion/Dark Red |
| WHITE, SUMMIT/Red, Flame | 50 | 70 | | X | | Vermillion/Silver |
| WHITE, SUMMIT/Quicksilver (Metallic) | 50 | 96 | | X | | Vermillion/Silver |

#Requires AM7 Folding Rear Seat

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

C/K REGULAR CAB PICKUP
INTERIOR AND EXTERIOR COLOR AVAILABILITY CHART
K3500 MODEL ONLY
WITH ZY3 AND ZY4 PAINT

PLEASE NOTE: Below are the interior trim color and exterior paint combinations recommended by Chevrolet/GMC. They are the only available interior and exterior combinations allowed.

| TRIM LEVEL | | | | INTERIOR COLORS | | | | | | |
|---|--|-----------------------|-----------------|-----------------|---|--------|------|--------|---|----------------------|
| Seat Type | | | Decor | Beige | Blue | Garnet | Gray | Saddle | | |
| CHEYENNE/SIERRA SL | | | STD | | | | | | | |
| Vinyl Bench Seat | | | | VUU1 | VDD1 | VRR1 | VQQ1 | VSS1 | | |
| Cloth Bench Seat | | | | CUU1 | CDD1 | CRR1 | COQ1 | CSS1 | | |
| SCOTTSDALE/SIERRA SLX | | | Z62 | | | | | | | |
| Cloth Bench Seat | | | | CUU1 | CDD1 | CRR1 | COQ1 | CSS1 | | |
| Custom Vinyl Bench Seat | | | | XUU1 | XDD1 | XRR1 | XQQ1 | XSS1 | | |
| Custom Vinyl Bucket Seat | | | | | XDD2 | XRR2 | | XSS2 | | |
| SILVERADO/SIERRA SLE | | | YE9 | | | | | | | |
| Custom Cloth Bench Seat | | | | LUU1 | LDD1 | LRR1 | LQQ1 | LSS1 | | |
| Custom Vinyl Bench Seat | | | | XUU1 | XDD1 | XRR1 | XQQ1 | XSS1 | | |
| Custom Cloth Bucket Seat | | | | | LDD2 | LRR2 | LQQ2 | LSS2 | | |
| Custom Vinyl Bucket Seat | | | | | XDD2 | XRR2 | | XSS2 | | |
| EXTERIOR COLORS
w/ ZY3 & ZY4 PAINT | | Two-Tone
Available | Color
Code 1 | Color
Code 2 | INTERIOR & EXTERIOR COMBINATIONS SHOWN
ARE THE ONLY COMBINATIONS AVAILABLE | | | | | STRIPE COLOR |
| BLACK, SABLE (Metallic)/
Gold, Adobe (Metallic) | | ZY4 only | 18 | 52 | | | | | X | Gold/Black |
| BLACK, SABLE (Metallic)/
Quicksilver | | All | 18 | 96 | | | | X | | Vermillion/Silver |
| BLACK, SABLE (Metallic)/
Red, Flame | | ZY4 only | 18 | 70 | | | X | | | Vermillion/Dark Red |
| BLUE, ICED (Metallic)/
Blue, Pacific (Metallic) | | ZY3 only | 22 | 30 | | X | | X | | Light Blue/Dark Blue |
| BLUE, ICED (Metallic)/
Quicksilver (Metallic) | | ZY3 only | 22 | 96 | | X | | X | | Light Blue/Dark Blue |
| BLUE, PACIFIC (Metallic)/
Blue, Iced (Metallic) | | ZY4 only | 30 | 22 | | X | | X | | Light Blue/Dark Blue |
| BLUE, PACIFIC (Metallic)/
Quicksilver (Metallic) | | All | 30 | 96 | | X | | X | | Vermillion/Silver |
| BLUE, PACIFIC (Metallic)/
White, Summit | | ZY4 only | 30 | 50 | | X | | | | Light Blue/Dark Blue |
| BLUE, PACIFIC (Metallic)/
White, Summit | | ZY4 only | 30 | 50 | | | | | X | Gold/Black |
| BRANDYWINE/
Black, Sable (Metallic) | | All | 96 | 18 | | | X | | | Vermillion/Dark Red |
| BRANDYWINE/
Quicksilver (Metallic) | | All | 96 | 96 | X | | X | | | Vermillion/Silver |
| BRANDYWINE/White, Summit | | ZY4 only | 96 | 50 | | | X | | | Vermillion/Dark Red |
| BROWN, SPICE (Metallic)/
Gold, Adobe (Metallic) | | ZY4 only | 32 | 52 | X | | | | X | Doeskin/Carmine |
| BROWN, SPICE (Metallic)/
Sandstone (Metallic) | | ZY4 only | 32 | 58 | X | | | | | Doeskin/Carmine |
| GOLD, ADOBE (Metallic)/
Black, Sable (Metallic) | | ZY3 only | 52 | 18 | | | | | X | Doeskin/Carmine |
| GOLD, ADOBE (Metallic)/
Brown, Spice (Metallic) | | ZY3 only | 52 | 32 | X | | | | | Doeskin/Carmine |
| QUICKSILVER (Metallic)/
Black, Sable (Metallic) | | All | 96 | 18 | | | | X | | Vermillion/Silver |
| QUICKSILVER (Metallic)/
Blue, Iced (Metallic) | | All | 96 | 22 | | X | | | | Light Blue/Dark Blue |
| QUICKSILVER (Metallic)/
Blue, Pacific (Metallic) | | All | 96 | 30 | | X | | | | Light Blue/Dark Blue |
| QUICKSILVER (Metallic)/
Brandywine (Metallic) | | All | 96 | 96 | | | X | | | Vermillion/Silver |
| QUICKSILVER (Metallic)/
Red, Flame | | ZY4 only | 96 | 70 | | | X | | | Vermillion/Silver |
| RED, FLAME/Black, Sable | | ZY3 only | 70 | 18 | | | | | X | Gold/Black |
| RED, FLAME/Black, Sable | | ZY3 only | 70 | 18 | | | X | | | Vermillion/Dark Red |
| RED, FLAME/
Quicksilver (Metallic) | | ZY3 only | 70 | 96 | | | X | | | Vermillion/Dark Red |
| RED, FLAME/
Quicksilver (Metallic) | | ZY3 only | 70 | 96 | | | | | X | Vermillion/Silver |
| SANDSTONE (Metallic)/
Black, Sable (Metallic) | | ZY3 only | 58 | 18 | X | | | | | Doeskin/Carmine |
| SANDSTONE (Metallic)/
Brown, Spice (Metallic) | | ZY3 only | 58 | 32 | X | | | | X | Doeskin/Carmine |
| WHITE, SUMMIT/
Blue, Iced (Metallic) | | ZY3 only | 50 | 22 | | X | | | | Light Blue/Dark Blue |
| WHITE, SUMMIT/
Blue Pacific (Metallic) | | ZY3 only | 50 | 30 | | X | | | | Light Blue/Dark Blue |
| WHITE, SUMMIT/
Brown, Spice (Metallic) | | ZY3 only | 50 | 32 | | | | | X | Doeskin/Carmine |
| WHITE, SUMMIT/
Brandywine (Metallic) | | ZY3 only | 50 | 96 | | | X | | | Vermillion/Dark Red |
| WHITE, SUMMIT/
Quicksilver (Metallic) | | ZY3 only | 50 | 96 | | | X | | | Vermillion/Silver |

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

C/K EXTENDED CAB PICKUP
INTERIOR AND EXTERIOR COLOR AVAILABILITY CHART
K3500 MODELS ONLY
WITH ZY3 AND ZY4 PAINT

PLEASE NOTE: Below are the interior trim color and exterior paint combinations recommended by Chevrolet/GMC. They are the only available interior and exterior combinations allowed.

| TRIM LEVEL | | | | INTERIOR COLORS | | | | |
|---|--|-----------------------|-----------------|-----------------|---|--------|--------|----------------------|
| Seat Type | | | | Decor | Blue | Garnet | Saddle | |
| CHEYENNE/SIERRA SL | | | | STD | VDD1 | VRR1 | VSS1 | |
| Vinyl Bench Seat | | | | | VDD3 | VRR3 | VSS3 | |
| #Vinyl Split Bench Seat | | | | | | | | |
| SCOTTSDALE/SIERRA SLX | | | | Z62 | XDD1 | XRR1 | XSS1 | |
| Custom Vinyl Bench Seat | | | | | XDD3 | XRR3 | XSS3 | |
| #Custom Vinyl Split Bench Seat | | | | | XDD2 | XRR2 | XSS2 | |
| #Custom Vinyl Bucket Seat | | | | | | | | |
| SILVERADO/SIERRA SLE | | | | YE9 | LDD3 | LRR3 | LSS3 | |
| #Custom Cloth Split Bench Seat | | | | | XDD3 | XRR3 | XSS3 | |
| #Custom Vinyl Split Bench Seat | | | | | LDD2 | LRR2 | LSS2 | |
| #Custom Cloth Bucket Seat | | | | | XDD2 | XRR2 | XSS2 | |
| #Custom Vinyl Bucket Seat | | | | | | | | |
| EXTERIOR COLORS
w/ZY3, & ZY4 PAINT | | Two-Tone
Available | Color
Code 1 | Color
Code 2 | INTERIOR & EXTERIOR COMBINATIONS SHOWN
ARE THE ONLY COMBINATIONS AVAILABLE | | | STRIPE COLOR |
| BLACK, SABLE (Metallic)/Gold, Adobe (Metallic) | | ZY4 only | 18 | 52 | | | X | Gold/Black |
| BLACK, SABLE (Metallic)/Red, Flame | | ZY4 only | 18 | 70 | | X | | Vermillion/Dark Red |
| BLUE, ICED (Metallic)/Blue, Pacific (Metallic) | | ZY3 only | 22 | 30 | X | | | Light Blue/Dark Blue |
| BLUE, ICED (Metallic)/Quicksilver (Metallic) | | ZY3 only | 22 | 96 | X | | | Light Blue/Dark Blue |
| BLUE, PACIFIC (Metallic)/Blue, Iced (Metallic) | | ZY4 only | 30 | 22 | X | | | Light Blue/Dark Blue |
| BLUE, PACIFIC (Metallic)/Quicksilver (Metallic) | | All | 30 | 96 | X | | | Vermillion/Silver |
| BLUE, PACIFIC (Metallic)/White, Summit | | ZY4 only | 30 | 50 | X | | | Light Blue/Dark Blue |
| BLUE, PACIFIC (Metallic)/White, Summit | | ZY4 only | 30 | 50 | | | X | Gold/Black |
| BRANDYWINE/Black, Sable (Metallic) | | All | 95 | 18 | | X | | Vermillion/Dark Red |
| BRANDYWINE/Quicksilver (Metallic) | | All | 95 | 96 | | X | | Vermillion/Silver |
| BRANDYWINE/White, Summit | | ZY4 only | 95 | 50 | | X | | Vermillion/Dark Red |
| BROWN, SPICE (Metallic)/Gold, Adobe (Metallic) | | ZY4 only | 32 | 52 | | | X | Doeskin/Carmine |
| GOLD, ADOBE (Metallic)/Black, Sable (Metallic) | | ZY3 only | 52 | 18 | | | X | Doeskin/Carmine |
| QUICKSILVER (Metallic)/Blue, Iced (Metallic) | | ZY4 only | 96 | 22 | X | | | Light Blue/Dark Blue |
| QUICKSILVER (Metallic)/Blue, Pacific (Metallic) | | All | 96 | 30 | X | | | Light Blue/Dark Blue |
| QUICKSILVER (Metallic)/Brandywine (Metallic) | | All | 96 | 95 | | X | | Vermillion/Silver |
| QUICKSILVER (Metallic)/Red, Flame | | ZY4 only | 96 | 70 | | X | | Vermillion/Silver |
| RED, FLAME/Black, Sable | | ZY3 only | 70 | 18 | | | X | Gold/Black |
| RED, FLAME/Black, Sable | | ZY3 only | 70 | 18 | | X | | Vermillion/Dark Red |
| RED, FLAME/Quicksilver (Metallic) | | ZY3 only | 70 | 96 | | X | | Vermillion/Dark Red |
| RED, FLAME/Quicksilver (Metallic) | | ZY3 only | 70 | 96 | | | X | Vermillion/Silver |
| SANDSTONE (Metallic)/Brown, Spice (Metallic) | | ZY3 only | 58 | 32 | | | X | Doeskin/Carmine |
| WHITE, SUMMIT/Blue, Pacific (Metallic) | | ZY3 only | 50 | 30 | X | | | Light Blue/Dark Blue |
| WHITE, SUMMIT/Brandywine (Metallic) | | ZY3 only | 50 | 95 | | X | | Vermillion/Dark Red |
| WHITE, SUMMIT/Brown, Spice (Metallic) | | ZY3 only | 50 | 32 | | | X | Doeskin/Carmine |
| WHITE, SUMMIT/Quicksilver (Metallic) | | ZY3 only | 50 | 96 | | X | | Vermillion/Silver |

#Requires AM7 Folding Rear Seat.

PRELIMINARY INFORMATION—SUBJECT TO CHANGE

C/K PICKUP


SOLID AND TWO-TONE* EXTERIOR COLOR COMBINATIONS

The application of paint for solid and two-tone exterior color combinations is shown below.


Solid color paint (ZY1) is standard on all models. All painted areas of the cab, front end sheet metal, and box are the same color. Outlined block "Chevrolet/GMC" decal lettering is applied to the tailgate. (A bright trim plate with lettering is applied on Fleetside/Wideside models when the Silverado/Sierra SLX Model Option is ordered.)




Conventional two-tone (ZY2) paint colors are available only on single rear wheel Fleetside/Wideside Pickup models. Color code 1 is applied to the areas above the lower styling crease line (including the cab roof). Color code 2 is applied to the areas below. Outlined block "Chevrolet/GMC" decal lettering is applied to the tailgate. (A bright trim plate with lettering is applied on Fleetside/Wideside models when the Silverado/Sierra SLX Model Option is ordered.)

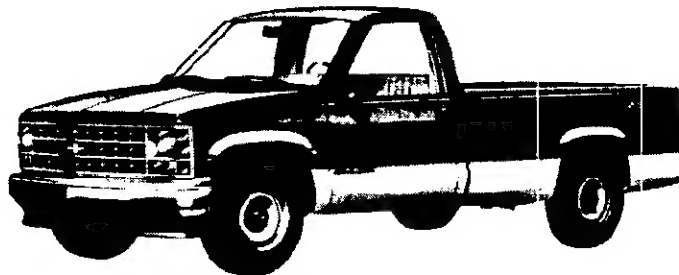

Special two-tone (ZY3) paint colors are available only on single rear wheel Fleetside/Wideside Pickup models and includes a multi-stripe decal applied over the paint break at the belt line. Color code 1 is applied to the areas above the decal (including the cab roof). Color code 2 is applied to the areas below. Outlined block "Chevrolet/GMC" decal lettering is applied to the tailgate. (A bright trim plate with lettering is applied on Fleetside/Wideside models when the Silverado/Sierra SLX Model Option is ordered.)

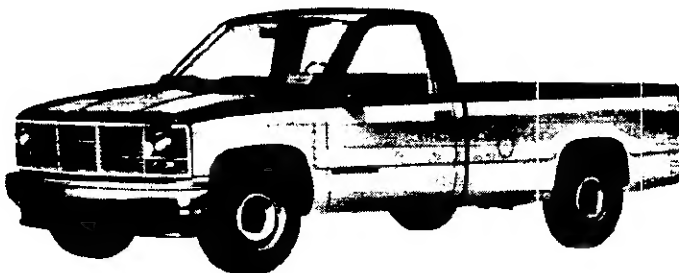

Deluxe two-tone (ZY4) paint colors are available only on single rear wheel Fleetside/Wideside Pickup models and include the belt line decal described in Special two-tone. The cab roof, hood and pickup box above the belt line decal, as well as the area below the lower styling crease line are painted Color Code 1. The areas between the decal and the lower crease line are painted Color Code 2. Outlined block "Chevrolet/GMC" decal lettering is applied to the tailgate. (A bright trim plate with lettering is applied on Fleetside/Wideside models when the Silverado/Sierra SLX Model Option is ordered.)

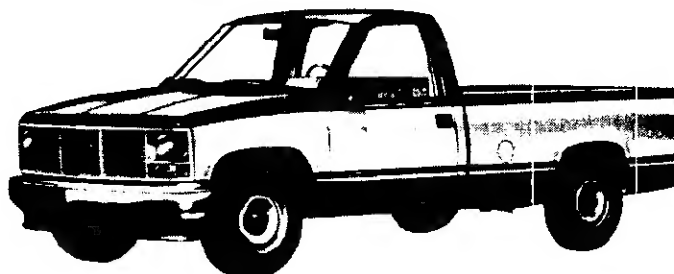

*Optional at extra cost

PRELIMINARY INFORMATION—SUBJECT TO CHANGE